


**Carnival Cruise Line
Dishroom
Half Moon Cay, Bahamas**



INTERNATIONAL INC.

2055 W 73rd Street, Miami, FL 33016

Ph: (305)826-8696 Fax: (305)826-9131

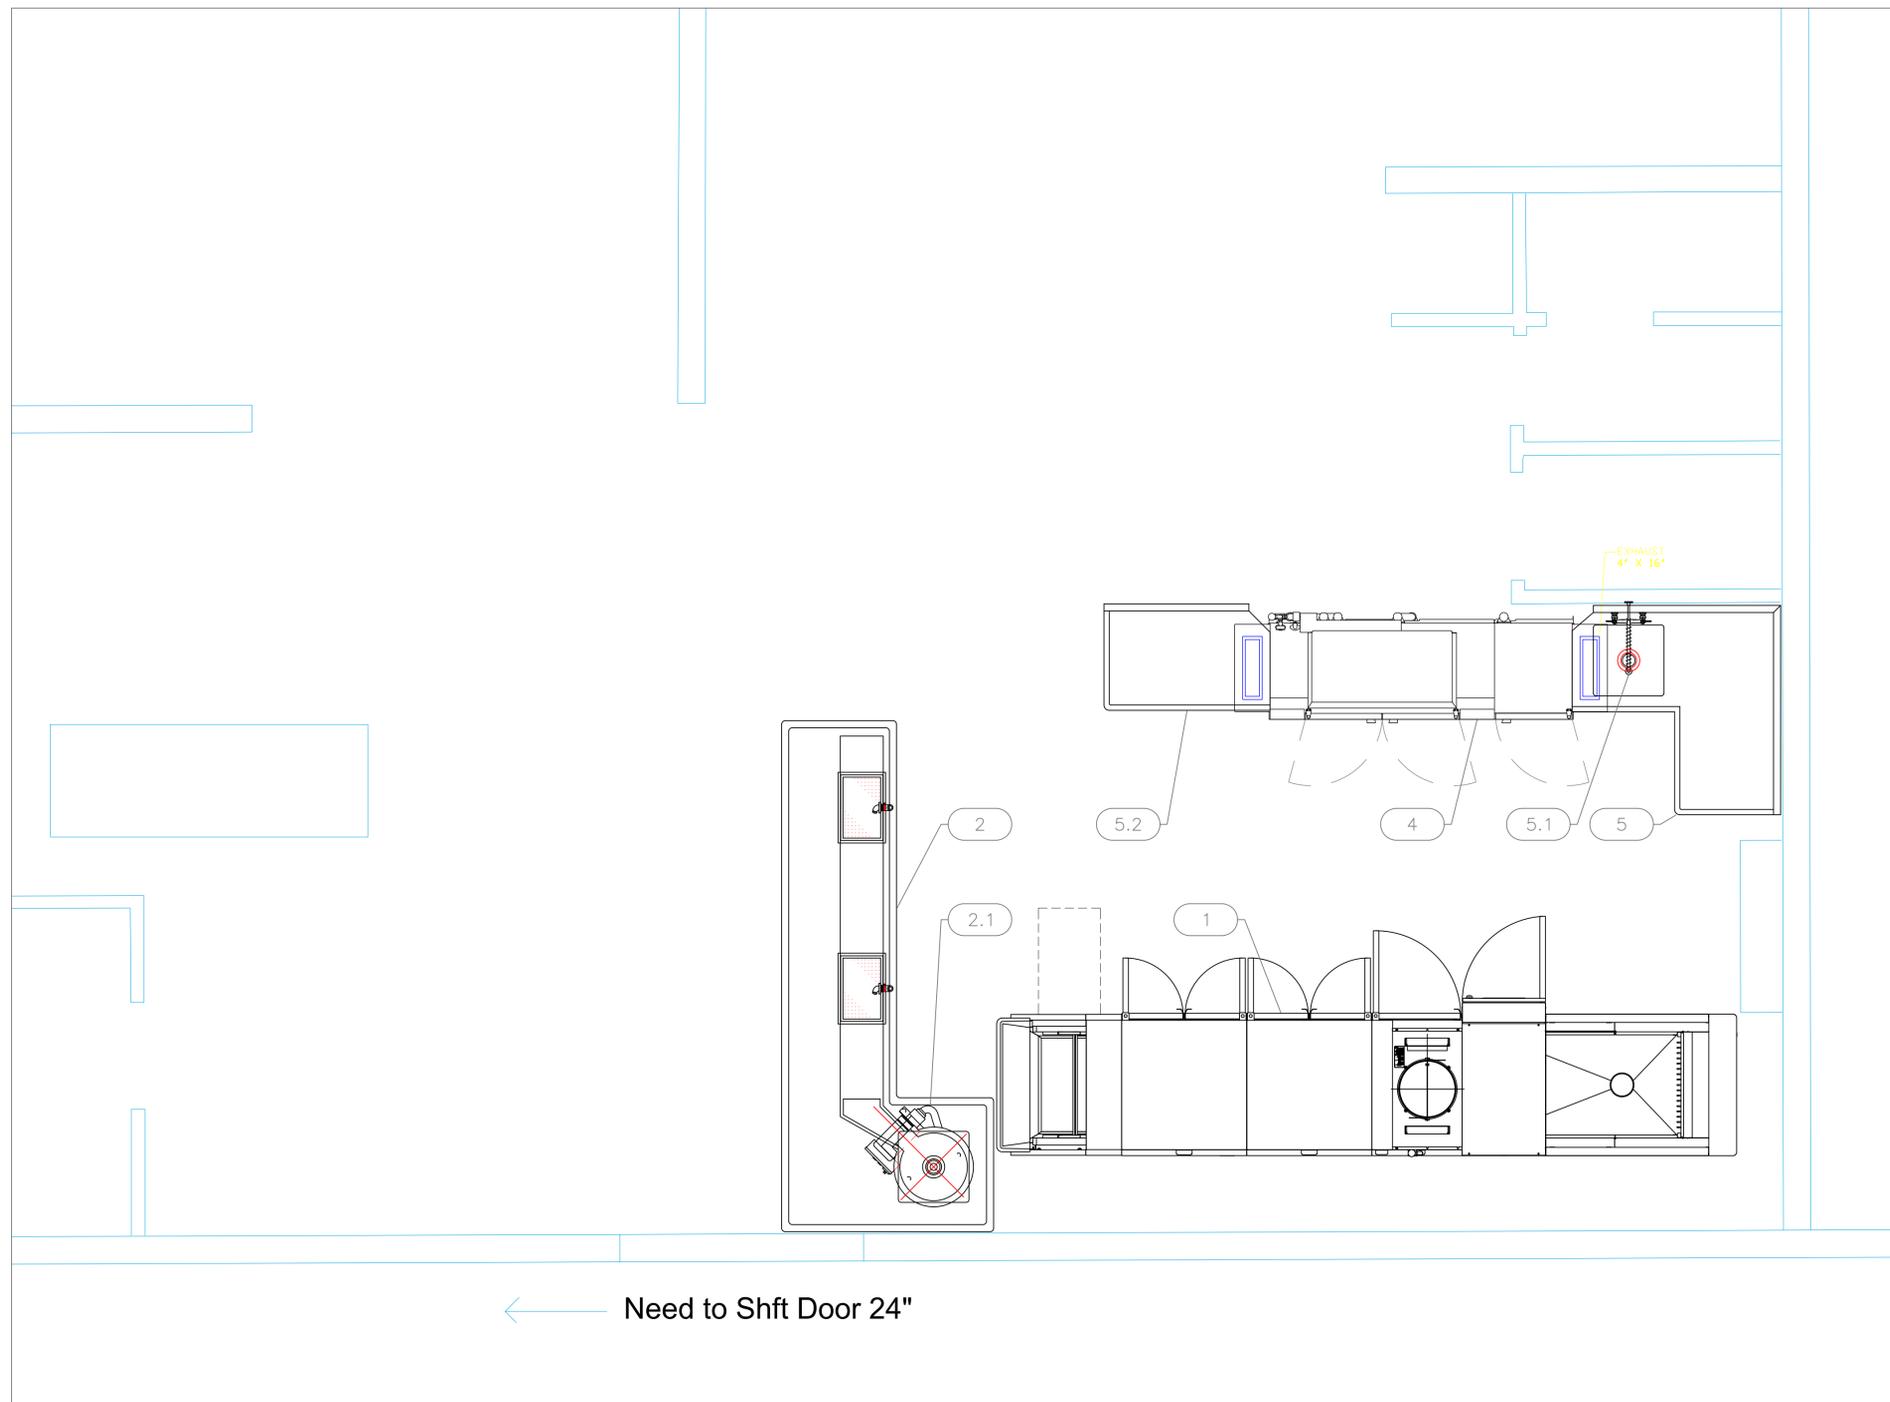

← Need to Shft Door 24"

| | | |
|-----|---|----------|
| 1 | Preliminary Layout | 12-05-24 |
| 2 | Updated Hobart Machine | 12-10-24 |
| 3 | Switch back to Older layout but modified. | 12-18-24 |
| 4 | Minor update to Custom Dishtables | 1-6-25 |
| No. | Revision/Issue | Date |

Date
Jan 06, 2025

Drawn By
Dayne Gauntlett

Scale
1/2" = 1'0"

Sheet
FS-1.0

| EQUIPMENT SCHEDULE | | | | | |
|--------------------|-------------------------------|------------|---------------------|----------|-------------------|
| ItemNo | Category | Mfr | Model | Quantity | Equipment Remarks |
| 1 | Flight Machine | Hobart | HOBART FT1000E+BASE | 1 | |
| 2 | Dishtable, Soiled | Custom Fab | DISHTABLE | 1 | |
| 2.1 | Waste Collector | Salvajor | S419 | 1 | |
| | Disposer, Parts & Accessories | Salvajor | RSS | 1 | |
| | Mounting Bracket | Salvajor | 980104 | 1 | |
| 4 | Dishwasher, Conveyor Type | Hobart | CL86-ADV+BUILDUP | 1 | Existing |
| | | Hobart | CL86ADV-ERH24K | 1 | |
| 5 | Dishtable, Soiled | Custom Fab | DISHTABLE | 1 | |
| 5.1 | Pre-Rinse Faucet Assembly | Krowne | DX-109 | 1 | |
| 5.2 | Dishtable, Clean | Custom Fab | DISHTABLE | 1 | |

EQUIPMENT LAYOUT

All Dimensions to be verified on the job site.
Actual locations for floor drains, and any ventilating equipment to be determined by Engineer.
Mechanical, Plumbing & Electrical to be checked and verified by Customers MEP Engineer.
Remote Condensing Units to be located by Architect.
Exhaust & Supply fans to be located by Architect.