

infrico.us

Infrico



Foodservice Catalog 2026



ETL LISTED TO UL471 standard and
santiation classified to NSF7.

Non contractual pictures.

We reserve the right to change specifications
without prior notice.

The technical data is subject to possible
variations that will be updated periodically in
the product spec sheets, which are available
on our website.

Infrico S. L. 2026

INDEX

1



14
REACH-IN
REFRIGERATORS
& FREEZERS

2



30
BLAST CHILLERS &
SHOCK FREEZERS

3



42
CHEF BASES

4




50
UNDERCOUNTERS &
WORKTOPS

5



62
PREP TABLES

6

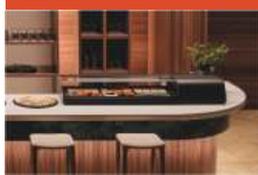

72
COUNTER TOP
DISPLAY CASE

7



80
BEVERAGE COOLERS

8



96
WINE CABINETS

9



102
DRY AGING

10



112
PASTRY AND GELATO
DISPLAY CASES

11



126
SUPERMARKET &
GROCERY STORE



INFRICO is a Family owned & operated Manufacturer based out of the Southern region of Spain, a major Global Market Player for 40 years in the production & sales of **“HIGH SPEC” Commercial Refrigeration Equipment**. With our NORTH AMERICA H.Q. located in Miami FL, our products are located across the United States since 2011 with incredible success. Our line is design driven, perfect for any type of environment, whether you work with **bakeries gourmet cafés, luxury hotels & resorts, restaurants, entertainment parks, casinos, schools, airports, sport stadiums, grocery stores, or supermarkets**. Part of this success comes from the **strong relationships** we keep building with our Customers, Dealers and Consultants throughout the country, who contribute enormously in specifying our products for multiple projects across the USA.

We carry a vast supply of parts stocked locally and have been able to establish a solid U.S. service network with access to the **top authorized service agents across the country**. Our equipment is warehoused in multiple U.S. locations and is manufactured to the highest international quality standards and regulations.

Infrico offers an incredible diverse range of options such as **Reach-ins, Wine coolers, Under counters and Worktops, Dry Agings, Prep Tables, Retro Refrigerators, Blast Chillers & Shock Freezers, Sushi Cases, Supermarket cases, Euro-style bakery cases, Gelato cases, Air Curtains Grab n’ Go cases**, and much more...



INFRICO was established in 1986 with a clear objective: to produce the best refrigeration solutions adapted to the specific needs of each customer.

Leading in technology, certified quality, and product excellence are the guarantees backing its commitment to innovation. This is what has positioned Infrico as one of leading commercial refrigeration equipment manufacturers across the world.

Infrico offers a comprehensive range of refrigeration

equipment for the **foodservice and retail sectors**, providing complete solutions for all types of establishments with a cohesive design and exceptional quality. Infrico has customers around the world and a large share of the national market, as we continue the growth process and expansion throughout the world. Infrico currently has more than seven hundred employees spread across 14 branches in Spain and 25 worldwide.

We look forward to serving you soon.

**Infrico USA
North America Division**

Infrico

Features

Sanitation

- Rounded interior corners.
- Internal drain trap with plug.
- Triple chamber snap in door gasket.

Cabinet


- Insulation with CFC's free insulation.
- Exterior and Interior built-in AISI 304 & 430 Stainless Steel.

100% Tested

- All products go through individual testing.
- All systems are tested in helium gas chambers from "Lazzero Technology".
- Audited and certified by INTERTEK to fulfill the UL 471 and NSF-7 standards. All certifications are applicable to the U.S. and Canada. Satellite program Partner with INTERTEK.

Control system

- High precision temperature control.
- NTC probes.
- Automatic defrost cycle.

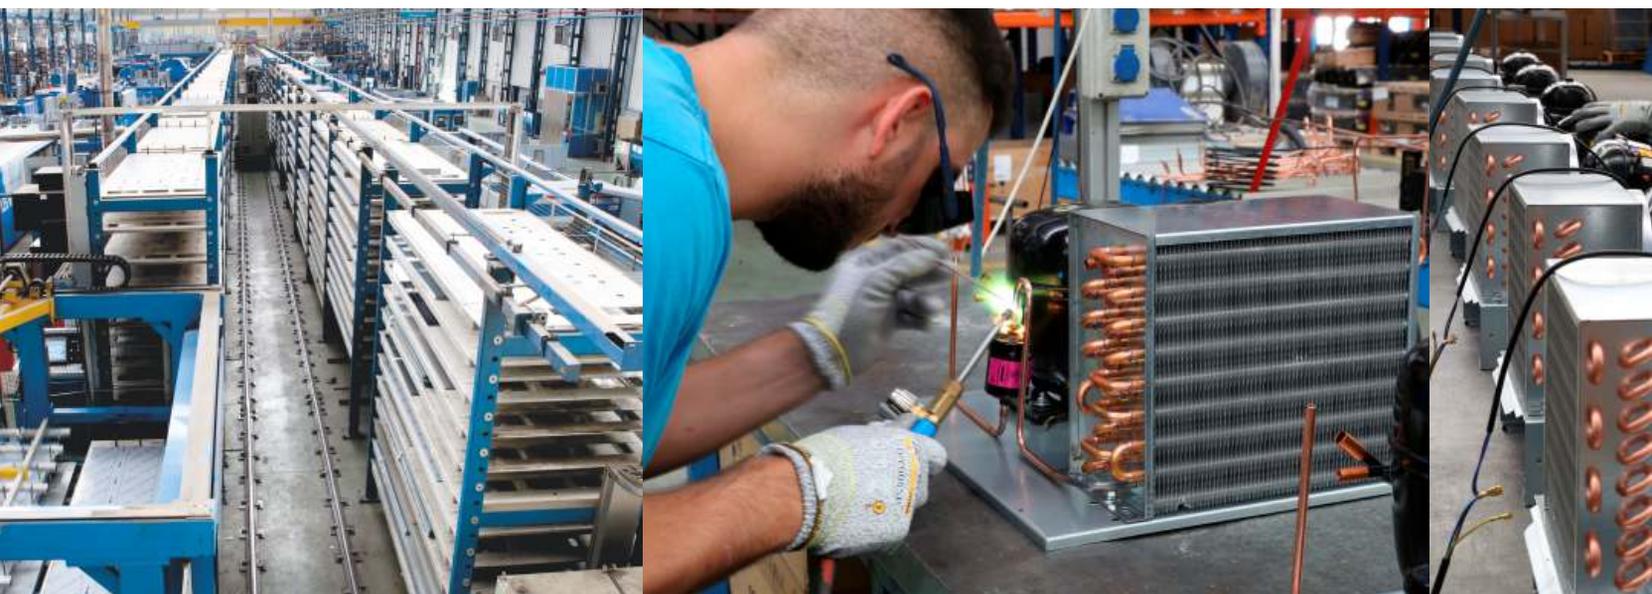

Doors

- Hinges built with self-closing system and stay open door mechanism.
- Triple chamber door gasket.
- Integrated door handles.
- Field reversible door feature available on single section uprights and all our horizontal equipment.

Refrigeration system

- Removable condensing units.
- Anti-corrosion evaporators.
- Monoblock (INFRIBLOCK®) on our top mounted equipment, for easy service, cleaning and repair.
- Expansion valve.
- Capillary system.
- 100% Polyester coated evaporators.

Production

- 2 million square foot factory dedicated to the manufacturing of commercial refrigeration equipment.
- Highly automated factory.

Quality assurance & continuous improvement

- Our laboratories are approved according to Council Directive DC 2004/108/CE of Electrical Safety and Electromagnetic Compatibility DC 2006/95/CE.
- Some of our products are ENERGY STAR® certified for superior energy efficiency.

Stock

- Multiple warehousing facilities located across the United States.



Infrico

Quality & Benefits

- The steel used is AISI 304 and 430 stainless steel.



- Compressors used, all of them are from renowned brands recognized in the market: Tecumseh, Embraco and Secop.



- The condensers and evaporators used are tested specifically to withstand pressures of 150 bars.



- The digital controllers are from recognized brands in the industry, such as EVCO, Dixell, Carel and Eliwell. New EVCO EVJ200 Digital Controller.



- Siliconized Ip67 LED lighting provides greater protection against humidity.



- Our fans are compatible with new refrigerants including hydrocarbon gases. They're also from prestigious brands such as EBM.



- All of our equipment contains well known and high grade refrigeration components such as Danfoss, Castell, Parker and Sanhua.



- The hinges guarantee a minimum of 75,000 cycles of openings with damping system. Larger doors are equipped with double closing hinges and stay opened featured mechanism.



- All equipment with an R290 load comes equipped with a safety, triple shut-off valve. In the event of a technical issue, it makes it easier to check the pressure, load, or vacuum of the circuit, and then it can be resealed with the safety plug.



- The interior floor with over extended rounded corners and drain plug for easy cleaning.




- The resistors, we use armored demister resistors made with stainless steel. The cartridges heaters are from IRCA. They are made of incoloy steel which gives them a greater resistance to corrosion and greater durability. The trays of the display cases and other cabinets are made of AISI 304 stainless steel.



- Universal Tray Slide [Standard]



- All electrical equipment complies with UL standards and it is labeled for ease of repair.

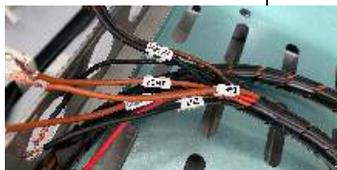

Infrico

Quality & Benefits

- The carbon steel grilles and wire shelves are more compact (meaning less separation between rods) and epoxy treated. All cabinets with glass doors have reinforced rods resulting in higher resistance to bending and allowing for higher load capacity.



- High resistance casters (331 Lbs/wheel minimum).



- PVC profiles, prepared to withstand the effects of low temperature, and designed to resist grease and have a long lifespan, with easy-to-clean geometry and triple inner chamber to maximize insulation.



- Glass door units utilize tempered glass. Our freezers have triple glazing, low emissivity glass with argon gas between the panes.



- The self-closing drawer slides, from Fulterer, a worldwide known brand, are made of stainless steel. They have a load capacity of 165.3 lbs. on tables (154.3 lbs. in total extraction) and 264.5 lbs. in the MSG units. The damping system is designed to work in temperatures as cold as -13°F.



- Wooden packaging, with internal polyethylene protections, ensuring high impact resistance and rigidity for land transportation, loading, and unloading.



- Ergonomic, double-sided, full stainless handles.



- Infrico's state-of-the-art testing facilities are designed to ensure the highest levels of quality and performance across all of our refrigeration equipment. With cutting-edge technology and rigorous testing protocols, we are able to consistently meet industry-leading standards. Infrico has proudly been awarded the Satellite Program by Intertek, which gives us full confidence to test and certify our equipment in-house for UI and NSF.





Testing Site Acceptance



The following organization has been assessed and found to comply with the relevant requirements of ISO/IEC 17025 and the Intertek Global Satellite Program Manual and accepted by Intertek as a Level 3

Recognized **SATELLITE™** Laboratory

for Test Data Acceptance through the Utilization of Customer Test Facilities (CTF Stage 3) for the ETL mark and is authorized to perform test work for the product types identified on the endorsement to this Testing Site Acceptance.



We are at the main trade fairs in the country



Infrico has obtained the following certifications:



U.S. DEPARTMENT OF ENERGY



The NAFEM Show 25



NATIONAL RESTAURANT ASSOCIATION SHOW 2024



E+sd Energy & Store Development Conference



1. Reach-in Refrigerators & Freezers





1. Reach-in Refrigerators & Freezers

Top mounted reach-In

	Models	Description
20	IRR-AGB23	1 Solid Door Refrigerator - 23 ft ³
	IRR-AGB23_2	2 Solid Door Refrigerator - 23 ft ³
	IRR-AGB49	2 Solid Door Refrigerator - 49 ft ³
	IRR-AGB49_4	4 Solid Door Refrigerator - 49 ft ³
	IRR-AGB23BT	1 Solid Door Freezer - 23 ft ³
	IRR-AGB23BTCR	1 Glass Door Freezer- 23 ft ³
	IRR-AGB49BT	2 Solid Door Freezer- 49 ft ³
	IRR-AGB23CR	1 Glass Door Refrigerator - 23 ft ³
	IRR-AGB49CR	2 Glass Door Refrigerator - 49 ft ³

Roll-In & Roll-thru

	Models	Description
21	IRR-AGB45RI	1 Section Roll-In Refrigerator With 66-1/4" Cart Capacity
	IRR-AGB96RI	2 Section Roll-In Refrigerator With 66-1/4" Cart Capacity
	IRR-AGB45RT	1 Section Roll-Thru Refrigerator With 66-1/4" Cart Capacity
	IRR-AGB45RIBT	1 Section Roll-Thru Freezer With 66-1/4" Cart Capacity

Pass Thru

	Models	Description
22	IRR-AGB901PDCR	2 Glass Door Refrigerator Pass Thru Extra Wide - 27.7 ft ³
	IRR-AGB901PDC	2 Solid Door Refrigerator Pass Thru Extra Wide - 27.7 ft ³
	IRR-AGB701PDCR	2 Glass Door Refrigerator Pass Thru - 19.7 ft ³
	IRR-AGB701PDC	2 Solid Door Refrigerator Pass Thru - 19.7 ft ³
	IRR-AGB1402PDCR	4 Glass Door Refrigerator Pass Thru - 43.7 ft ³
	IRR-AGB1402PDC	4 Solid Door Refrigerator Pass Thru - 43.7 ft ³
	IRR-AGB701WPDCR	1 Glass Door Pass Thru Heated Cabinet - 19.7 ft ³
	IRR-AGB701WPDC	1 Solid Door Pass Thru Heated Cabinet - 43.7 ft ³

Hardening Cabinet

	Models	Description
24	IRR-AGB801IC	1 Solid Door Hardening Cabinet - 25.4 ft ³
	IRR-AGB1302IC	2 Solid Door Hardening Cabinet - 49 ft ³



Bottom mounted reach-In, Refrigerators & freezers

Models	Description
26 IRR-AN23	1 Solid Door Refrigerator - 23 ft ³
IRR-AN23_2	2 Solid Door Refrigerator - 23 ft ³
IRR-AN23MX	2 Solid Door Refrigerator & Freezer - 23 ft ³
IRR-AN49	2 Solid Door Refrigerator - 49 ft ³
IRR-AN49_4	4 Solid Door Refrigerator - 49 ft ³
IRR-AN67	3 Solid Door Refrigerator - 67ft ³
IRR-AN67_6	6 Solid Door Refrigerator - 67ft ³
IRR-AN23BT	1 Solid Door Freezer - 23 ft ³
IRR-AN49BT	2 Solid Door Freezer - 49 ft ³
IRR-AN67BT	3 Solid Door Freezer - 67 ft ³

Models	Description
26 IRR-AN49MX	2 Solid Door Dual Refrigerator & Freezer - 49 ft ³
IRR-AN23CR	1 Glass Door Refrigerator - 23 ft ³
IRR-AN49CR	2 Glass Door Refrigerator 49 ft ³
IRR-AN67CR	3 Glass Door Refrigerator -67 ft ³
IRR-AN23BTCR	1 Glass Door Freezer - 23 ft ³
IRR-AN49BTCR	2 Glass Door Freezer 49 ft ³



Top mounted Slim Line reach-In, Refrigerators & freezers

Models	Description
28 IRR-AGN300CR	1 Glass Door Refrigerator
IRR-AGN301	1 Solid Door Refrigerator
IRR-AGN302	2 Solid Door Refrigerator
IRR-AGN301BT	1 Solid Door Freezer
IRR-AGN600CR	2 Glass Door Refrigerator


Models	Description
28 IRR-AGN602	2 Solid Door Refrigerator
IRR-AGN603	3 Solid Door Refrigerator
IRR-AGN604	4 Solid Door Refrigerator
IRR-AGN602BT	2 Solid Door Freezer
IRR-AGN602MX	2 Solid Door Dual Refrig. & Freezer



Specifications



Triple chamber snap in door gasket for easy cleaning

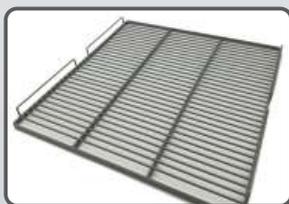

Reinforced shelves



Compact monoblock system [AGB models]



AGB23



AN23MX



AGB 1402 PDCR

Exterior

- AISI 304 stainless steel [AGN, AGB pass thru and Roll in Series].
- AISI 430 stainless steel [AN and AGB Series].

Interior


- AISI 304 stainless steel [AGN, AGB pass thru and Roll in Series].
- AISI 430 stainless steel [AN and AGB Series].
- Sealed interior floors and rounded cabinet corners.
- Led lighting.
- Internal drain plug for easy cleaning.

Shelving

- Three plastic coated wire shelves per door with stainless steel tray slides included and installed.
- Tray slides are compatible with 18"x26" and 12"x20" sheet pans.

Doors

- Polyurethane insulated doors.
- Self-closing doors with stay-open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible doors.
- Doors locks.
- Full-height door opening [22-7/8" x 58-5/8"].

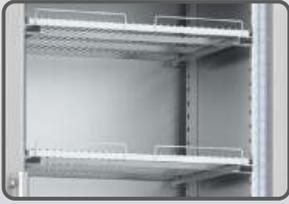

Stainless steel interior and pre-installed tray-slides from the factory.



Expansion valve AGB and AGN models and AN model freezers



New Digital Controller EVCO



Universal Tray Slide [Standard]



AN67

Refrigeration

- Forced-air refrigeration system, expansion valves over cap tube.
- Digital temperature controller with automatic defrost system.
- Energy-saving, non-electric condensate pan.
- Evaporator coil coated with anticorrosion material 100% Polyester.
- Electronic fans.
- Hot gas defrost for low temp units.



AGB45 RI

Roll-in & roll-thru

Exterior

- Insulated bottom 0.8" with 1" thick floor ramp included.
- Built with removable panel for easy instalation.

Interior

- AISI 304 stainless steel.
- Panel thickness 3-3/16".

Refrigeration

- Compact refrigeration system monoblock, INFRIBLOCK®.

AGB Series

Top mounted Reach-in Refrigerators & Freezers

AGB Series

Compact monoblock system



STANDARD
Expansion valve



IRR-AGB23



Door lock

Compatible
18" x 26"
12" x 20"
sheet pans

Full-height door opening
[22-7/8" x 58-5/8"]

IRR-AGB49CR



RGB LED STANDARD
on-glass door



MOD.	Overall Dimensions			Doors	Shelves	[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
IRR-AGB23	27	31-1/4	84	1	3	33°F/38°F	23.0	1/4	3.8	380	Hydrocarbon R-290
IRR-AGB23_2	27	31-1/4	84	2	3	33°F/38°F	23.0	1/4	3.8	380	Hydrocarbon R-290
IRR-AGB49	54-1/2	31-1/4	84	2	6	33°F/38°F	49.0	1/3	4.0	700	Hydrocarbon R-290
IRR-AGB49_4	54-1/2	31-1/4	84	4	6	33°F/38°F	49.0	1/3	4.0	700	Hydrocarbon R-290
IRR-AGB23BT	27	31-1/4	84	1	3	-5°F/0°F	23.0	3/4	7.2	375	Hydrocarbon R-290
IRR-AGB49BT	54-1/2	31-1/4	84	2	6	-5°F/0°F	49.0	1-1/4	10.5	620	Hydrocarbon R-290
IRR-AGB23CR	27	31-1/4	84	1	4	33°F/38°F	23.0	1/3	5.0	380	Hydrocarbon R-290
IRR-AGB49CR	54-1/2	31-1/4	84	2	8	33°F/38°F	49.0	1/3	5.2	620	Hydrocarbon R-290
IRR-AGB23BT-CR	27	31-1/4	84	1	4	-5°F/0°F	23.0	1/3	7.79	455	Hydrocarbon R-290

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz Expansion valve (all) and hot gas defrost system (BT)	Cord and NEMA 5-15P plug, (AGB 23BT)
DOE DOORS	BT Models: Heated door frame to avoid accumulation of ice	Door built-in Thermopane double glass [CR models]
AMBIENT	Temp 100°F	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

RI Series

Infrico Food Service Equipment '26

Roll-in & Roll Thru Refrigerators & Freezers

RI Series



Rack not included

MOD.	Overall Dimensions			Doors	Temp. Range	Depth	Capacity	Power	Weight	DOE
	Width	Height	Depth		[°F]	[ft ³]	[HP]	115V [Amps]	[Lbs]	
IRR-AGB45RI	37-1/4	41-3/4	93	1	33°F/38°F	45.24	1/2	6	510	Hydrocarbon R-290
IRR-AGB96RI	71-5/8	41-3/4	93	2	33°F/38°F	96.3	5/8	12.3	970	Hydrocarbon R-290
IRR-AGB45RT	37-1/4	41-3/4	93	2	33°F/38°F	45.24	1/2	6	510	Hydrocarbon R-290
IRR-AGB45RIBT	37-1/4	41-3/4	93	1	-5°F/0°F	45.24	5/8	14	510	Hydrocarbon R-290

STANDARD FEATURES

ELECTRICAL	For Refrigerators: Cord and NEMA 5-15P plug For Freezers: Cord and NEMA 5-20P plug. / Cord and NEMA L14-30P plug. (AGB 96RIBT) Electrical connection is 115V / 1ph / 60Hz
MAX RACK SIZE	→ 27-1/4 ↗ 36-1/4 ↑ 71-1/2
EXTERIOR	AISI 304 stainless steel Insulated bottom with 0.8" thick with ramp included Insulated floor with 2.5" thick with ramp included



MOD.	Overall Dimensions	Doors	Shelves	(°F)	(ft ³)	(HP)	115V (Amps)	[Lbs]	DOE		
IRR-AGB701PDC	27	33-3/4	83-1/2	2	6	33°F/38°F	19.7	1/3	2.94	385	Hydrocarbon R-290
IRR-AGB701PDCR	27	33-3/4	83-1/8	2	6	33°F/38°F	19.7	1/3	2.94	385	Hydrocarbon R-290
IRR-AGB901PDC	31-3/8	40-3/8	83-1/2	2	6	33°F/38°F	27.7	1/3	7.3	485	Hydrocarbon R-290
IRR-AGB901PDCR	31-3/8	40-3/8	83-1/8	2	6	33°F/38°F	27.7	1/3	7.3	485	Hydrocarbon R-290
IRR-AGB1402PDCR	54-1/2	33-3/4	83-1/2	4	6-12	33°F/38°F	43.7	2/5	8.2	795	Hydrocarbon R-290
IRR-AGB1402PDC	54-1/2	33-3/4	83-1/2	4	6-12	33°F/38°F	43.7	2/5	8.2	795	Hydrocarbon R-290
NEW IRR-AGB701WPDCR	27	33-3/4	83-1/2	2	6	90°F/180°F	19.7	1000W	9.2	350	
NEW IRR-AGB701WPDC	27	33-3/4	83-1/2	2	6	90°F/180°F	19.7	1000W	9.2	350	

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz		
DOE DOORS	Door built-in Thermopane double glass [CR models]		
AMBIENT	Temp 100°F		
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"	Split doors





IRR-AGB801IC



IRR-AGB1302IC



		Overall Dimensions	Doors	Shelves	Temperature	Volume	Power	Voltage	Weight	DOE		
NEW	IRR-AGB801IC	31-3/8	39-3/8	84	1	3	-4°F/-40°F	25.4	1-1/2	8.0	396	Hydrocarbon R-290
NEW	IRR-AGB1302IC	54-1/2	32-1/8	84	2	6	-4°F/-40°F	49.0	1/3	16.08	615	Hydrocarbon R-290

STANDARD FEATURES

EXTERIOR INTERIOR	White plastic-coated galvanized steel AISI 304 stainless steel	
REFRIGERATION	Expansion valve Energy-saving non-electric condensate pan Evaporator coil coated with anti-corrosion material 100% Polyester	
AMBIENT	Temp 100°F	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel shelf Set of 6" legs, height adjustable from 5" to 8"	Additional slide kits



Bottom mounted Reach-in Refrigerators & Freezers

AN Series



MOD.	Overall Dimensions			Doors	Shelves	[°F]	[ft ³]	[HP]	115V	220V	[Lbs]	DOE
IRR-AN23	27	31-3/8	83-1/2	1	3	33°F/38°F	23.0	1/4	3.8		430	Hydrocarbon R-290
IRR-AN23_2	27	31-3/8	83-1/2	2	3	33°F/38°F	23.0	1/4	3.8		430	Hydrocarbon R-290
IRR-AN23MX DUAL TEMP. +/-	27	31-3/8	83-1/2	2	3+3	33°F/38°F -5°F/0°F	11.5 11.5	1/4 1/2	9.07		386	Hydrocarbon R-290
IRR-AN49	54-1/2	31-3/8	83-1/2	2	6	33°F/38°F	49.0	1/3	4.0		600	Hydrocarbon R-290
IRR-AN49_4	54-1/2	31-3/8	83-1/2	4	6	33°F/38°F	49.0	1/3	4.0		600	Hydrocarbon R-290
IRR-AN67	82	31-3/8	83-1/2	3	9	33°F/38°F	67.0	1/2	6.1		900	Hydrocarbon R-290
IRR-AN67_6	82	31-3/8	83-1/2	6	9	33°F/38°F	67.0	1/2	6.1		900	Hydrocarbon R-290
IRR-AN23BT	27	31-3/8	83-1/2	1	3	-5°F/0°F	23.0	3/4	6.1		430	Hydrocarbon R-290
IRR-AN49BT	54-1/2	31-3/8	83-1/2	2	6	-5°F/0°F	49.0	1 -1/4	8.7	2	610	Hydrocarbon R-290
IRR-AN67BT	82	31-3/8	83-1/2	3	9	-5°F/0°F	67.0	3/4+3/4	10.6	4	900	Hydrocarbon R-290
IRR-AN49MX DUAL TEMP. +/-	54-1/2	31-3/8	83-1/2	2	6	33°F/38°F -5°F/0°F	23.0 23.0	1/4 3/4	10.5	-	700	Hydrocarbon R-290
IRR-AN23CR	27	31-3/8	83-1/2	1	4	33°F/38°F	23.0	1/3	3.8		430	Hydrocarbon R-290
IRR-AN49CR	54-1/2	31-3/8	83-1/2	2	8	33°F/38°F	49.0	1/3	4.9		600	Hydrocarbon R-290
IRR-AN67CR	82	31-3/8	83-1/2	3	12	33°F/38°F	67.0	1/2	6.2		723	Hydrocarbon R-290
IRR-AN23BTCR	27	31-3/8	83-1/2	1	4	33°F/38°F	23.0	1/3	3.8		430	Hydrocarbon R-290
IRR-AN49BTCR	54-1/2	31-3/8	83-1/2	2	8	33°F/38°F	49.0	1/3	4.9		600	Hydrocarbon R-290

Height already includes 5-1/8" for casters

Bottom mounted Reach-in Refrigerators & Freezers

AN Series

Tray sliders are compatible with 18" x 26" and 12" x 20" sheet pans



RGB LED lighting (standard glass doors)

IRR-AN49CR



IRR-AN67_6

Sealed interior floors and rounded cabinet corners

Reinforced wire shelves

IRR-AN23CR



IRR-AN67_6

STANDARD FEATURES

<p>ELECTRICAL</p>	<p>Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz Cord and NEMA 5-15P plug, [AGB 23BT] Forced air refrigeration and Capillary system Each compartment has its own refrigeration system [MX] Expansion valve [only BT] and hot gas defrost system [BT]</p>	<p>NEMA 5-15P AN23BT AN49BT NEMA 5-20P AN67BT AN49MX Built-in double Thermopane glass door [CR]</p>
<p>DOE DOORS</p>	<p>BT Models: Heated door frame to avoid accumulation of ice Built-in double-glass thermopane in coolers and triple-glass in freezers.</p>	
<p>AMBIENT</p>	<p>Temp 100°F</p>	
<p>OPTIONS Section 10 [Accessories & parts]</p>	<p>Stainless Steel wire shelves Stainless Steel tray divider</p>	<p>Additional slide kits Set of 6" legs, height adjustable from 5" to 8"</p>

IRR-AGN301



IRR-AGN602MX (DUAL TEMP)



MOD.	Overall Dimensions			Doors	Shelves	(°F)	(ft ³)	(HP)	115V (Amps)	[Lbs]	DOE
IRR-AGN300CR	19	27-7/8	82-1/16	1	4	33/38 °F	11.5	1/3	4.3	269	Hydrocarbon R-290
IRR-AGN301	19	27-7/8	82-1/16	1	3	33/38 °F	11.5	1/3	4.1	265	Hydrocarbon R-290
IRR-AGN302	19	27-7/8	82-1/16	2	3	33/38 °F	11.5	1/3	4.1	265	Hydrocarbon R-290
IRR-AGN301BT	19	27-7/8	82-1/16	1	3	0 °F	11.5	3/8	5.6	265	Hydrocarbon R-290
IRR-AGN600CR	38-3/8	27-7/8	82-1/16	2	8	33/38 °F	26.30	3/8	5.8	392	Hydrocarbon R-290
IRR-AGN602	38-3/8	27-7/8	82-1/16	2	6	33 / 38 °F	26.30	3/8	5.6	320	Hydrocarbon R-290
IRR-AGN603	38-3/8	27-7/8	82-1/16	3	6	33 / 38 °F	26.30	3/8	5.6	320	Hydrocarbon R-290
IRR-AGN604	38-3/8	27-7/8	82-1/16	4	6	33 / 38 °F	26.30	3/8	5.6	320	Hydrocarbon R-290
IRR-AGN602BT	38-3/8	27-7/8	82-1/16	2	6	0 °F	26.30	3/4	8.5	320	Hydrocarbon R-290
IRR-AGN602MX	38-3/8	27-7/8	82-1/16	2	6	33 / 38 °F 0 °F	11.5- 26.30	1/3- 3/8	8.08	392	Hydrocarbon R-290

Height already includes 5-1/8" for casters

AGN Series

Infrico Food Service Equipment '26

Top mounted Reach-in Refrigerators

SLIM LINE AGN Series

1 REACH-IN REFRIGERATORS & FREEZERS



RGB LED lighting
[standard glass doors]

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug, electrical connection is 115V / 1ph / 60Hz	
DOE DOORS	Plastic coated reinforced wire shelves hold up 155 lb [CR Models] Double glass Thermopane [CR models]	
AMBIENT	Temp 100°F	
OPTIONS Section 10 [Accessories & parts]	Stainless Steel wire shelves Stainless Steel tray divider	Additional slide kits Set of 6" legs, height adjustable from 5" to 8"

2. Blast Chillers & Shock Freezers





2. Blast Chillers & Shock Freezers



Blast chillers & shock freezers

	Models	Description
36		How blast chillers work & cycle functions
	38	
	IBC-ABT3 1S	Blast chillers/shock freezers - 3 trays
	IBC-ABT5 1L	Blast chillers/shock freezers - 5 trays
	IBC-ABT5 1C	Blast chillers/shock freezers, -5 trays
	IBC-ABT6 1C	Blast chillers/shock freezers, - 6 trays
	IBC-ABT7 1M	Blast chillers/shock freezers - 7 trays table
	IBC-ABT7 1L	Blast chillers/shock freezers - 7 trays
	IBC-ABT10 1L	Blast chillers/shock freezers - 10 trays
	IBC-ABT14 1L	Blast chillers/shock freezers - 14 trays
40	IBC-ABT20 1CBI	Blast chillers/shock freezers, Roll-in - 20 trays
	IBC-ABT20 2CBI	Blast chillers/shock freezers, Roll-in - 20 trays
	IBC-ABT20 1C	Blast chillers/shock freezers, Roll-in - 20 trays
	IBC-ABT20 2C	Blast chillers/shock freezers, Roll-in - 20 trays
	IBC-ABT20 1P	Blast chillers/shock freezers, Roll-in - 20 trays
	IBC-ABT20 2P	Blast chillers/shock freezers, Roll-in - 20 trays



Specifications



Triple chamber snap in door gasket for easy cleaning



Double handle doors



Rounded corners & sealed interior floor, NSF7, including drain plug for cleaning



Touch screen controller with a user-friendly interface.



ABT3 1S



ABT71M



ABT51C

IBC-ABT3 1S / IBC-ABT5 1L & IBC-ABT7 1L

Exterior

- AISI 304 stainless steel.
- Compliant with HACCP regulations.

Interior

- AISI 304 stainless steel.
- Sealed interior floors and rounded cabinet corners.
- Internal drain plug for easy cleaning.
- Includes a heated conical probe which is easy to use and remove.

Shelving

- Compatible with 12" x 20" sheet pans in IBC-ABT31S (3 pans) and ABT5 1C (5 pans), ABT6 1C (6 pans) and IBC-ABT71M (7 pans).
- Compatible with 18"x26" sheet pans in IBC-ABT51L (5 pans), and IBC-ABT71L (7 trays).

Doors

- Polyurethane insulated doors.
- Self-closing doors with stay open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap-in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice.

Legs/Casters

- Stainless Steel adjustable legs (except IBC-ABT31S).
- Levelling feet.
- 4" casters standard [ABT51L, ABT71L, ABT71M].

Refrigeration

- Forced air refrigeration system, using expansion valve.
- Digital temperature controller with automatic defrost system.
- Evaporator coil coated with anticorrosion material 100% Polyester -100 °F ambient.
- 4" casters/legs standard [ABT51L, ABT71L, ABT71M].

Digital control

- Interactive control screen & menu.
- Up to 99 different customized cycles.
- USB Connection.



ABT101L

ABT201CBI

IBC-ABT10 1L & IBC-ABT14 1L / IBC-ABT20 1C & ABT20 2CBI

Exterior

- AISI 304 stainless steel.
- Compliant with HACCP regulations.
- Compatible with any standard pastry speed cart or combi trolley (only IBC-ABT202C model).

Interior

- AISI 304 stainless steel.
- Sealed interior floors and rounded cabinet corners.
- Internal drain plug for easy cleaning (only BC-ABT101L & IBC-ABT141L).
- Includes a heated conical probe which is easy to use and remove.

Shelving

- Compatible with any oven (12"x20" and 18"x26" sheet pans) only BC-ABT101L & IBC-ABT141L.

Doors

- Polyurethane insulated doors.
- Self-closing doors with stay-open feature.
- Heavy-duty hinges with horizontal and vertical adjustment.
- Triple chamber snap-in door gaskets for easy removal and cleaning.
- Heated door frame to avoid accumulation of ice.

Refrigeration

- Control panel with an easy to read screen and menu.
- Manual defrost during cycles and automatic defrost during maintenance.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Forced air refrigeration system.
- Drain pan with condensate heater (only BC-ABT101L & IBC-ABT141L).
- Blast chilling: +194°F to +37°F in less than 90 minutes.
- Blast freezing: +194°F to 0°F in less than 4 hours.
- P-trap required for models ABT201CBI and ABT202CBI.


Digital control

- Interactive control screen & menu.
- Up to 99 different customized cycles.
- USB Connection.

How blast chillers work & cycle functions

Blast chillers quickly reduce the core temperature of the products, whether they are cooked or fresh, conserving their fresh texture, hygiene and quality, while minimizing the risk of bacterial growth. The traditional methods of storing cooked food has always been to leave it to cool naturally until it reaches a suitable temperature to store in the refrigerator.

During the period when the core temperature falls from 149°F to 50°F, food will lose a lot of its natural characteristics, such as moisture, consistency, aroma and color, furthermore, this is when bacteria begins to develop. INFRICO'S BLAST CHILLERS are designed to reduce the time period for this critical change in temperature.

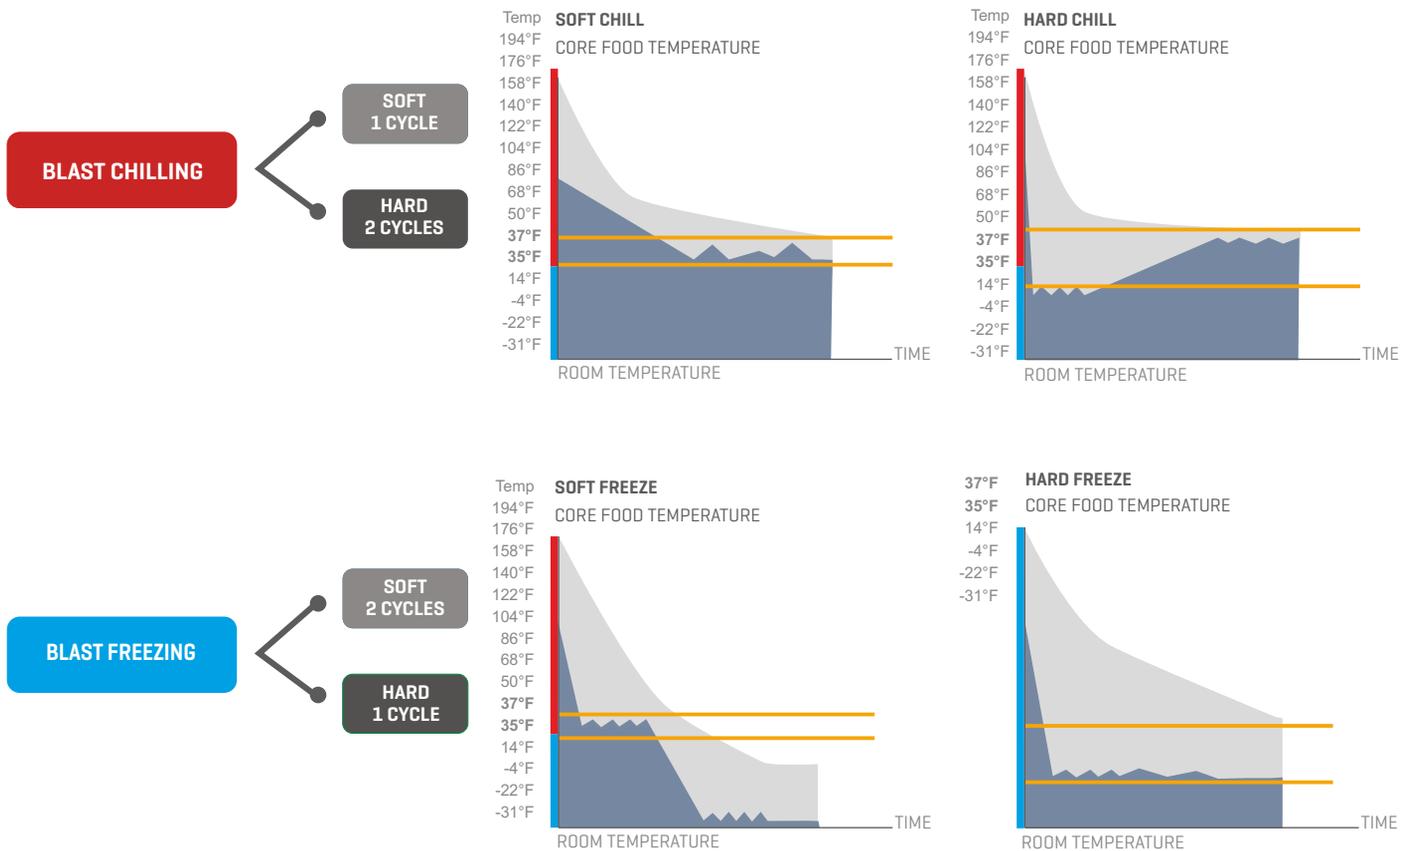


Blast chilling

Blast chilling allows cooked foods to maintain all of its original characteristics by quickly bringing the temperature down from 194°F to 37°F in less than 90 minutes and maintaining temperature between 32°F and 41°F, conserving the quality, aroma, color and consistency of the food.


Shock freezing

The blast freezing cycle quickly freezes cooked food, transforming the liquid within the food to micro-crystals of ice, without damaging the cellular structure of the food. Internal food temperature falls from 158 °F to -0.4°F in less than 270 minutes.

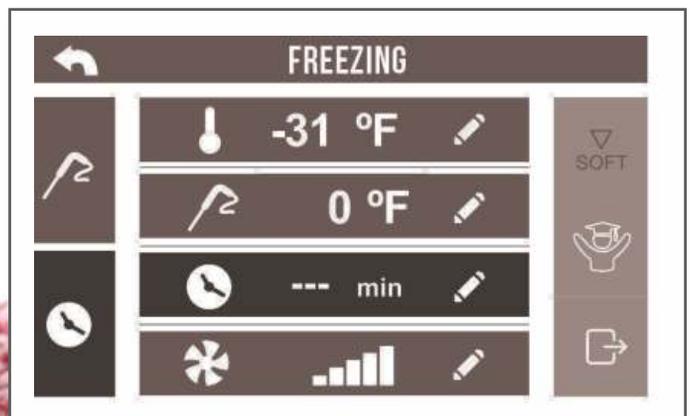


Main features

-  Stylish design, flush mounted, user-friendly.
-  Personalized cycles can be programmed with up to 3 different phases.
-  User interface with IP65 protection.
-  Management of blast chilling and freezing cycles, both temperature and time controlled, with hard/soft and intensity management functions.
-  Runs a test to check that the needle probe is correctly inserted (including multipoint probes).
-  Real-time graphic display for blast chilling/freezing cycle in progress.

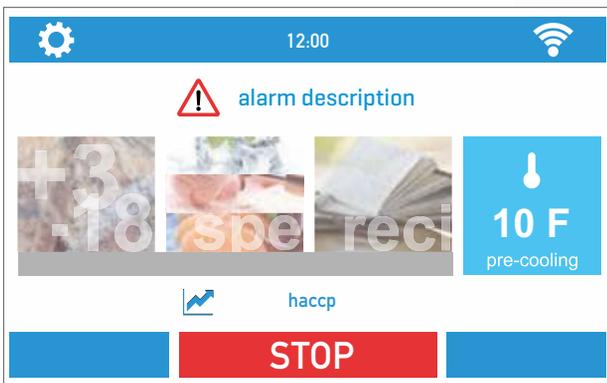

Benefits

-  Heated probe.
-  Management of special cycles (fish sanitation, ice cream hardening, etc.)
-  Possibility to personalize 99 programs.

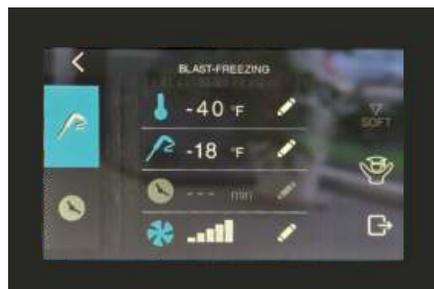

ABT Series

Blast chillers / Shock freezers

ABT Series

Blast chilling: +194°F to +37°F in less than 90 minutes.
 Blast freezing: +194°F to 0°F in less than 4 hours.

IBC-ABT3 1S



IBC-ABT7 1M



USB connection HACCP
Traceability

IBC-ABT7 1L



IBC-ABT6 1C



MOD.	Overall Dimensions			Doors	Shelves	(°F)	Chilling/Freezing capacity (Lbs)	(HP)	115V	220V	(Lbs)	DOE
IBC-ABT3 1S	28-3/8	28	21-1/4	1	3	-37.4°F	22/11	3/4	3.5		161	Hydrocarbon R-290
IBC-ABT5 1L	33	35-1/4	39-1/8	1	5	-37.4°F	44/26	1-1/4	15.04		293	Hydrocarbon R-290
IBC-ABT5 1C	33	28-1/2	31-1/2	1	5	-37.4°F	44/26	1-1/4	15.1		275	Hydrocarbon R-290
IBC-ABT6 1C	20	34-1/8	41-3/4	1	6	-37.4°F	44/26	1-1/4	14.69		227	Hydrocarbon R-290
IBC-ABT7 1M	57-13/16	27-9/16	36-5/8	1	7	-37.4°F	66/40	1-1/4	13.04		317	Hydrocarbon R-290 NEW
IBC-ABT7 1L	33	35-1/4	44-1/2	1	7	-37.4°F	66/40	1-1/4	13.04		337	Hydrocarbon R-290 NEW
IBC-ABT10 1L	33	34-1/8	68-1/2	1	10	-37.4°F	110/66	2-1/2		21.6	610	Hydrocarbon R-290 NEW
IBC-ABT14 1L	33	34-1/8	68-1/2	1	14	-37.4°F	110/66	2-1/2		21.6	610	Hydrocarbon R-290 NEW

Height already includes 5-1/8" casters in models: IBC-ABT7 1M, IBC-ABT7 1L, IBC-ABT10 1L, IBC-ABT14 1L

Blast chillers / Shock freezers

ABT Series

IBC-ABT10 1L / IBC-ABT14 1L



**NEW
ECO
EFFICIENT
R290**

Heated conical probe.



IBC-ABT10 1L



Double handle doors and flat gasket easily removable "cleanless".

STANDARD FEATURES

<p>SHELVING</p>	<p>Compatible with 12" x 20" sheet pans in IBC-ABT31S (3 pans), IBC-ABT51C (5 pans) and IBC-ABT71M (7 pans). Compatible with 18" x 26" sheet pans in IBC-ABT51L (5 pans), IBC-ABT71L (7 trays) and IBC-ABT61C (6 pans). IBC-ABT101L and IBC-ABT141L models, compatible with any oven [12"x20" and 18"x26" sheet pans].</p>	
<p>ELECTRICAL</p>	<p>Cord and NEMA 5-15P plug. Electrical connection is 115V / 1ph / 60Hz. MUST BE connected to 30 Amp. circuit breaker!</p>	<p>IBC-ABT101L and IBC-ABT141L models: Cord and NEMA L14-30P plug, Electrical connection are 220V [Compressor]</p>

BLAST CHILLERS
SHOCK FREEZERS

ABT Series

Blast chillers / Shock freezers Self contained / Remote Units

ABT Series

Blast chilling: +194°F to +37°F in less than 90 minutes.
Blast freezing: +194°F to 0°F in less than 4 hours.

IBC-ABT 20 1CBI

IBC-ABT 20 2CBI



Car entry

C Wheels inside P Pass-through

Overall Dimensions
 Doors
 (°F)
 Chilling/Freezing capacity (Lbs)
 [HP]
 220V [Amps]
 [Lbs]
 Car entry

MOD. SELF CONTAINED

	47-1/4	43-1/8	97	1	-40°F	180/120	4	24.91	1,093	GN1/1 18x26" or 12x20"
IBC-ABT20 1CBI										
IBC-ABT20 2CBI	55-1/8	51	97-1/16	1	-40°F	180/120	4	25.81	1,235	GN1/1 18x26" or 12x20"

MOD. REMOTE UNIT

	47-1/4	43-1/8	89-3/4	1	-40°F	180/120	Up to 25 Ft.	8.48	1,093	GN1/1 18x26" or 12x20"
IBC-ABT20 1C										
IBC-ABT20 2C	47-1/4	51	89-3/4	1	-40°F	180/120	Up to 25 Ft.	8.48	1,093	GN1/1 18x26" or 12x20"
IBC-ABT20 1P	47-1/4	46-7/8	89-3/4	2	-40°F	180/120	Up to 25 Ft.	8.48	1,093	GN1/1 18x26" or 12x20"
IBC-ABT20 2P	47-1/4	51	89-3/4	2	-40°F	180/120	Up to 25 Ft.	8.48	1,093	GN1/1 18x26" or 12x20"

Blast chillers / Shock freezers

Self contained / Remote Units

ABT Series

BLAST CHILLERS
SHOCK FREEZERS

IBC-ABT20 2P



Ramp not included

STANDARD FEATURES

<p>MAX CAR ENTRY INTERNAL SIZES</p>	
<p>ELECTRICAL</p>	<p>IBC-ABT201C/CBI / 202 Cord only included, Electrical connection is 220V / 3ph / 60Hz. MUST BE connected to 45 Amp. circuit breaker.</p>

3. Chef bases





3 CHEF BASES

33

Infrico

33

Infrico

3. Chef bases



Chef Bases

48

Models

IUC-MSG36

IUC-MSG48

IUC-MSG52

IUC-MSG52-60

IUC-MSG72

IUC-MSG96

IUC-MSG110

Description

Chef Bases - 2 Drawers - 2 Pans

Chef Bases - 2 Drawers - 4 Pans

Chef Bases - 2 Drawers - 6 Pans

Chef Bases - 2 Drawers - 6 Pans

Chef Bases - 4 Drawers - 8 Pans

Chef Bases - 4 Drawers - 12 Pans

Chef Bases - 6 Drawers - 12 Pans



Specifications



Drawers with telescopic guides up to 441 Lbs.



Flat reinforced worktop



Heavy-duty casters



MSG36



MSG52-60



MSG72

Exterior

- AISI 304 Stainless Steel top.
- Front and sides in AISI 430 Stainless Steel.
- Standard flat top.

Interior

- AISI 430 stainless steel.

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & Zero ODP effect.

Drawers

- Each drawer accommodates two or three full size 12"x20" pans.
- Drawers come standard with full-extension sliding rails for complete opening.
- Drawers with integrated handle.
- Heavy-duty Stainless Steel drawer slides designed to hold up to 440 Lbs.
- It can allocate 4" or 6" deep pans.

Refrigeration

- Temperature regulated by thermostatic control.
- Energy-saving non-electric condensate pan.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Forced air refrigeration system.
- Front-breathing refrigeration system.
- Refrigerant gas R290.

Electrical

- Cord and NEMA 5-15P plug.
- Electrical connection is 115V / 1ph / 60Hz.

Options

- Set of 6" legs, height adjustable from 5" to 8".

**HOLDS UP TO
700 LBS**
[MSG 36, 48, 52]



**HOLDS UP TO
1,000 LBS**
[MSG 72, 96, 110]



**CAPACITY
FOR UP TO
6" DEEP PANS**



MSG110

MSG96

AISI 304 Stainless steel worktop.
Capacity for 12"x20" fullsize pans for up to 6" deep.
Front and sides in AISI 430 Stainless Steel.
4" Diameter Casters with Locks on front set.



OPTIONS

Stainless Steel wire shelves.
Additional slide kits.

CAPACITY

Capacity for up to 6" deep pans.

MSG Series

Chef bases

MSG Series

IUC-MSG-96




21.65" heavy-duty stainless steel drawer slides designed to hold up to 440 Lbs.



4" reinforced insulated top

MOD.	Overall Dimensions			Drawers	(°F)	(ft ³)	(HP)	115V [Amps]	[Lbs]	DOE
IUC-MSG-36	36-5/8	32-1/2	26-1/4	2	33°F/38°F	5.2	1/5	4.8	300	Hydrocarbon R-290
IUC-MSG-48	48-5/8	32-1/2	26-1/4	2	33°F/38°F	6.8	1/5	4.8	390	Hydrocarbon R-290
IUC-MSG-52	53-1/4	32-1/2	26-1/4	2	33°F/38°F	9.9	1/3	6.5	450	Hydrocarbon R-290
IUC-MSG52-60	60	32-1/2	26-1/4	2	33°F/38°F	9.9	1/3	6.5	450	Hydrocarbon R-290
IUC-MSG-72	72-5/8	32-1/2	26-1/4	4	33°F/38°F	14.3	1/3	6.5	560	Hydrocarbon R-290
IUC-MSG-96	97	32-1/2	26-1/4	4	33°F/38°F	20.6	1/3	6.5	750	Hydrocarbon R-290
IUC-MS-110	110-5/8	32-1/2	26-1/4	6	33°F/38°F	22	1/3	6.9	850	Hydrocarbon R-290

Height already includes 5-1/8" for casters

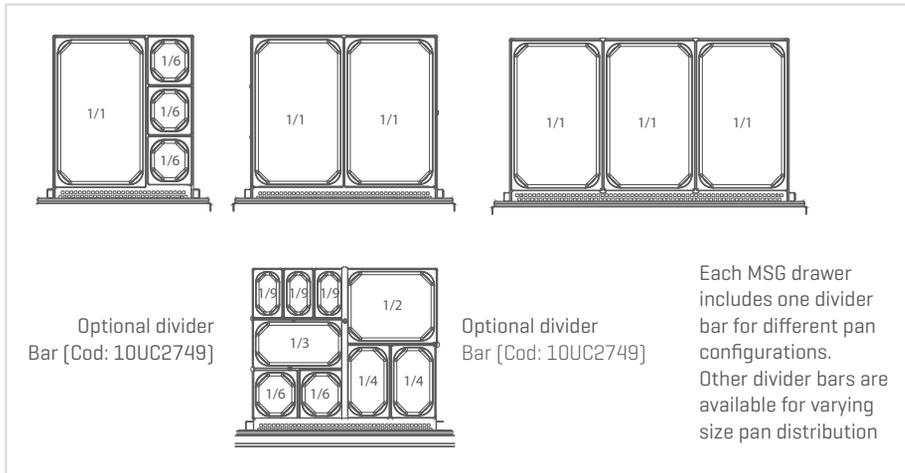

IUC-MSG-52



**HOLDS UP TO
700 LBS**
[MSG 36, 48, 52]

————  ————

**HOLDS UP TO
1,000 LBS**
[MSG 72, 96, 110]

————  ————

**CAPACITY
FOR UP TO
6" DEEP PANS**

————  ————

4. Undercounters & Worktops





4. Undercounters & Worktops

Undercounter Refrigerators and Freezers

	Models	Description
56	IUC-UC27R	1 Solid Door Refrigerator - 8 ft ³
	IUC-UC36R	2 Solid Door Refrigerator - 11 ft ³
	IUC-UC48R	2 Solid Door Refrigerator - 14 ft ³
	IUC-UC60R	2 Solid Door Refrigerator - 17 ft ³
	IUC-UC72R	3 Solid Door Refrigerator - 21 ft ³
	IUC-UC27RCR	1 Glass Door Refrigerator - 8 ft ³
	IUC-UC36RCR	2 Glass Door Refrigerator - 11 ft ³
	IUC-UC48RCR	2 Glass Door Refrigerator - 14 ft ³
	IUC-UC60RCR	2 Glass Door Refrigerator - 17 ft ³
	IUC-UC72RCR	3 Glass Door Refrigerator - 21 ft ³
	IUC-UC27F	1 Solid Door Freezer - 8 ft ³
	IUC-UC36F	2 Solid Door Freezer - 11 ft ³
	IUC-UC48F	2 Solid Door Freezer - 14 ft ³
	IUC-UC60F	2 Solid Door Freezer - 17 ft ³

Shallow Depth Worktop Refrigerators and Freezers

	Models	Description
58	IUC-UC27RW	1 Solid Door Refrigerator - 8 ft ³
	IUC-UC36RW	2 Solid Door Refrigerator - 11 ft ³
	IUC-UC48RW	2 Solid Door Refrigerator - 14 ft ³
	IUC-UC60RW	2 Solid Door Refrigerator - 17 ft ³
	IUC-UC72RW	3 Solid Door Refrigerator - 21 ft ³
	IUC-UC27RWCR	1 Glass Door Refrigerator - 8 ft ³
	IUC-UC36RWCR	2 Glass Door Refrigerator - 11 ft ³
	IUC-UC48RWCR	2 Glass Door Refrigerator - 14 ft ³
	IUC-UC60RWCR	2 Glass Door Refrigerator - 17 ft ³
	IUC-UC72RWCR	3 Glass Door Refrigerator - 21 ft ³
	IUC-UC27FW	1 Solid Door Freezer - 8 ft ³
	IUC-UC36FW	2 Solid Door Freezer - 11 ft ³
	IUC-UC48FW	2 Solid Door Freezer - 14 ft ³
	IUC-UC60FW	2 Solid Door Freezer - 17 ft ³



WorkTop Refrigerators and Freezers


Models	Description
60 IUC-MR41	1 Solid Door Refrigerator - 7.8 ft ³
IUC-MR67	2 Solid Door Refrigerator - 17 ft ³
IUC-MR93	3 Solid Door Refrigerator - 27 ft ³
IUC-MR41BT	1 Solid Door Freezer - 7.8 ft ³
IUC-MR67BT	2 Solid Door Freezer - 17 ft ³



Specifications



Triple chamber snap in door gasket for easy cleaning. AISI 430 Stainless Steel Interior & Exterior cabinet construction. AISI 304 Stainless Steel Top.

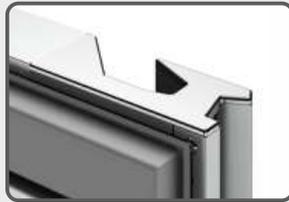

Double handle door



Standard expansion valve in freezers.



Pull-out side-mounted condensing unit for easy service.



UC27R CR



UC48R



UC72RCR

Undercounters / Shallow Depth Worktop refrigerators & freezers

Exterior

- AISI 430 stainless steel.
- AISI 304 stainless steel top.

Interior

- AISI 430 stainless steel.

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation - Low GWP & Zero ODP effect.

Shelving

- [2] Two plastic coated wire shelves per section.

Doors


- Polyurethane insulated doors.
- Self-closing doors with stay-open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Heated door frame to avoid accumulation of ice, [Models F].
- Field reversible doors.
- Door opening WxH: 23-1/4"x21-7/8" [UC27F]; 19-5/8"x21-7/8" [UC48F]; 25-5/8"x21-7/8" [UC60F].

Refrigeration

- Temperature regulated by thermostatic control.
- Hot gas defrost, [Models BT, F].
- Energy-saving non-electric condensate pan.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Forced air refrigeration system.



Protected digital Controller with automatic Defrost.

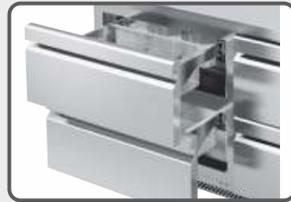

Each guide supports up to 132 lb.



Omega reinforcement in W and MR models



UC60RW CR



MR93

4" Blacksplash standard

Worktop refrigerators & freezers

Exterior

- AISI 430 stainless steel
- AISI 304 stainless steel top

Interior

- AISI 430 stainless steel
- Internal drain plug for easy cleaning
- Sealed interior floors and rounded cabinet corners

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation
- Low GWP & Zero ODP effect

Shelving

- [2] Two plastic coated wire shelves per section.

Doors




- Polyurethane insulated doors
- Self-closing doors with stay-open feature
- Stainless Steel heavy-duty hinges
- Triple chamber snap in door gaskets for easy removal and cleaning
- Heated door frame to avoid accumulation of ice, [Models BT, F]
- Field reversible doors
- Doors locks
- Door opening WxH: 21-5/8" x 20-5/8"

Refrigeration




- Digital temperature controller with automatic defrost system
- Hot gas defrost, [Models BT]
- Energy-saving non-electric condensate pan
- Extractable condensing unit for easy service
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Forced air refrigeration system
- 100°F ambient

Undercounter Refrigerators


UC Series



Top drawers



Bottom drawers



Each UC drawer includes one divider bar for different pan configurations. Other divider bars are available for varying size pan distribution.



Option flat granite top



MOD.	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
IUC-UC27R	27-5/8	30-1/8	32	1	33°F/38°F	8.0	1/4	3.9	270	Hydrocarbon R-290
IUC-UC36R	36-1/8	30-1/8	32	2	33°F/38°F	11.0	1/4	4.1	310	Hydrocarbon R-290
IUC-UC48R	48-1/8	30-1/8	32	2	33°F/38°F	14.0	1/4	4.1	354	Hydrocarbon R-290
IUC-UC60R	60-3/8	30-1/8	32	2	33°F/38°F	17.0	1/4	4.1	430	Hydrocarbon R-290
IUC-UC72R	72-5/8	30-1/8	32	3	33°F/38°F	21.0	1/3	4.6	506	Hydrocarbon R-290
IUC-UC27RCR	27-5/8	30-1/8	32	1	33°F/38°F	8.0	1/4	3.9	300	Hydrocarbon R-290
IUC-UC36RCR	36-1/8	30-1/8	32	2	33°F/38°F	11.0	1/4	4.1	344	Hydrocarbon R-290
IUC-UC48RCR	48-1/8	30-1/8	32	2	33°F/38°F	14.0	1/4	4.1	393	Hydrocarbon R-290
IUC-UC60RCR	60-3/8	30-1/8	32	2	33°F/38°F	17.0	1/4	4.1	477	Hydrocarbon R-290
IUC-UC72RCR	72-5/8	30-1/8	32	3	33°F/38°F	21.0	1/3	4.6	561	Hydrocarbon R-290
IUC-UC27F	27-5/8	30-1/8	32	1	0°F	8.0	1/2	5.0	270	Hydrocarbon R-290
IUC-UC36F	36-1/8	30-1/8	32	2	0°F	11.0	1/2	5.3	310	Hydrocarbon R-290
IUC-UC48F	48-1/8	30-1/8	32	2	0°F	14.0	1/2	5.3	360	Hydrocarbon R-290
IUC-UC60F	60-3/8	30-1/8	32	2	0°F	17.0	1/2	5.3	430	Hydrocarbon R-290

Height already includes 2-3/64" for casters

Undercounter Freezers

UC Series




4 UNDERCOUNTERS & WORKTOPS



STANDARD FEATURES			
ELECTRICAL	Electrical connection is 115V / 1ph / 60Hz	Cord and NEMA 5-15P plug	Electronic fan motors
OPTIONAL DRAWER KIT COMPATIBLE WITH:	12"x20" [UC27/UC60] pans 1/2+1/3 [UC48] pans +UC72 [Pans not included]		
OPTIONS Cap.10 [Accessories & parts]	Drawer kit Single Overshelf Double Overshelf	Set of 2" casters [locking on front set] Granite Top	

Shallow Depth Worktop Refrigerators

UCW Series

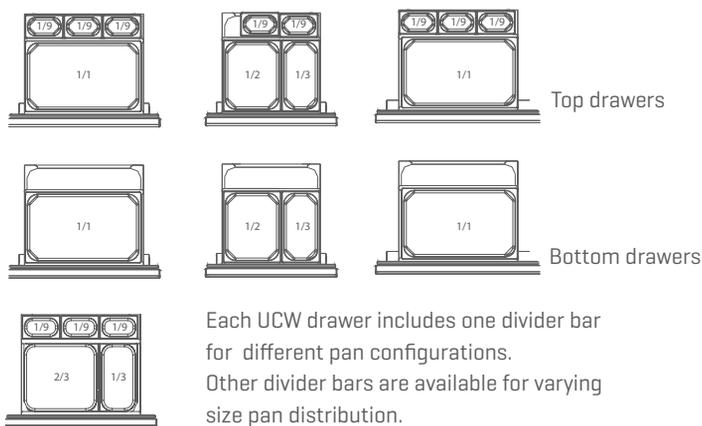

MOD.	Overall Dimensions (including backsplash)			Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
IUC-UC27RW	27-5/8	30-1/8	39	1	33°F/38°F	8.0	1/4	3.9	270	Hydrocarbon R-290
IUC-UC36RW	36-1/8	30-1/8	39	2	33°F/38°F	14.0	1/4	4.1	310	Hydrocarbon R-290
IUC-UC48RW	48-1/8	30-1/8	39	2	33°F/38°F	14.0	1/4	4.1	354	Hydrocarbon R-290
IUC-UC60RW	60-3/8	30-1/8	39	2	33°F/38°F	17.0	1/4	4.1	430	Hydrocarbon R-290
IUC-UC72RW	72-5/8	30-1/8	39	3	33°F/38°F	21.0	1/3	4.6	506	Hydrocarbon R-290
IUC-UC27RWCR	27-5/8	30-1/8	39	1	33°F/38°F	8.0	1/4	3.9	270	Hydrocarbon R-290
IUC-UC36RWCR	36-1/8	30-1/8	39	2	33°F/38°F	14.0	1/4	4.1	344	Hydrocarbon R-290
IUC-UC48RWCR	48-1/8	30-1/8	39	2	33°F/38°F	14.0	1/4	4.1	393	Hydrocarbon R-290
IUC-UC60RWCR	60-3/8	30-1/8	39	2	33°F/38°F	17.0	1/4	4.1	477	Hydrocarbon R-290
IUC-UC72RWCR	72-5/8	30-1/8	39	3	33°F/38°F	21.0	1/3	4.6	561	Hydrocarbon R-290
IUC-UC27FW	27-5/8	30-1/8	39	1	0°F	8.0	1/2	5.0	270	Hydrocarbon R-290
IUC-UC36FW	36-1/8	30-1/8	39	2	0°F	14.0	1/2	5.3	310	Hydrocarbon R-290
IUC-UC48FW	48-1/8	30-1/8	39	2	0°F	14.0	1/2	5.3	360	Hydrocarbon R-290
IUC-UC60FW	60-3/8	30-1/8	39	2	0°F	17.0	1/2	5.3	430	Hydrocarbon R-290

Height already includes 5-1/8" for casters

Shallow Depth Worktop Freezers

UCW Series



4 UNDERCOUNTERS & WORKTOPS


STANDARD FEATURES

ELECTRICAL	Electrical connection is 115V / 1ph / 60Hz	Cord and NEMA 5-15P plug	Electronic fan motors
OPTIONAL DRAWER KIT COMPATIBLE WITH:	12"x20" [UC27/UC60] pans 1/2+1/3 [UC48] pans +UC72 [Pans not included]		
OPTIONS Cap.10 [Accessories & parts]	Drawer kit Single Overshelf Double Overshelf	Set of 2" casters [locking on front set] Without backslash Granite Top	


MR Series

WorkTop Refrigerators

MR Series

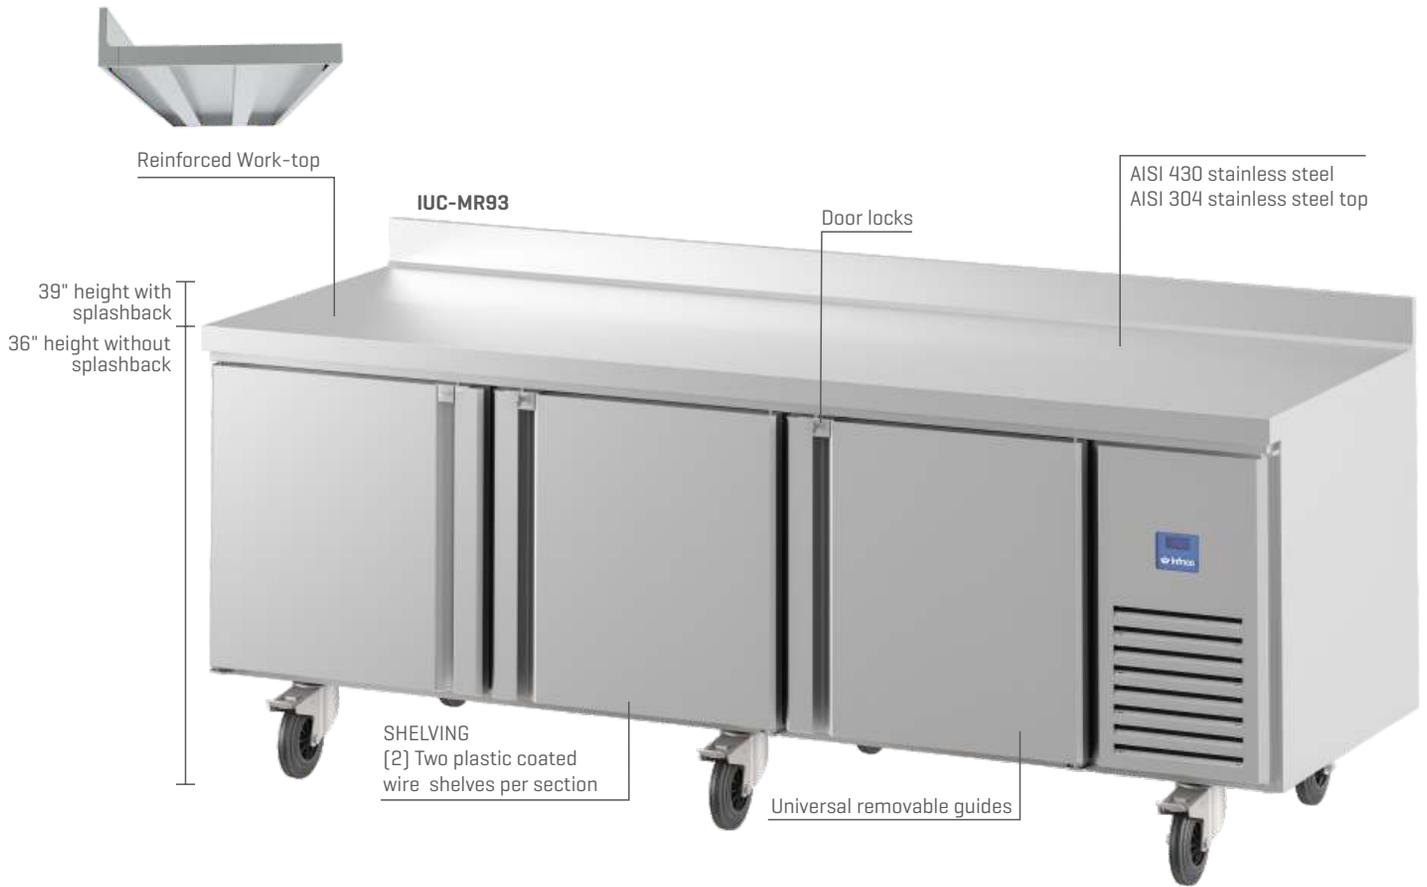


Protected digital Controller, with automatic Defrost



Divider bars are available for varying size pan distribution

Optional divider bar (cod: 10UC27134)



Optional divider bar (cod: 10UC2749)

MOD.	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V (Amps)	[Lbs]	DOE
IUC-MR41	41-3/8	32-5/8	39	1	33°F / 38°F	7.8	1/4	4.1	362	Hydrocarbon R-290
IUC-MR67	67-3/8	32-5/8	39	2	33°F / 38°F	17.0	1/3	4.6	510	Hydrocarbon R-290
IUC-MR93	93-1/4	32-5/8	39	3	33°F / 38°F	27.0	1/3	4.6	690	Hydrocarbon R-290
IUC-MR41BT	41-3/8	32-5/8	39	1	0°F	7.8	1/2	5.0	370	Hydrocarbon R-290
IUC-MR67BT	67-3/8	32-5/8	39	2	0°F	17.0	3/4	7.0	510	Hydrocarbon R-290

Height already includes 7-7/8" for casters

WorkTop Freezers

MR Series



IUC-MR67BT

Heated door frame to avoid accumulation of ice



Option granite top



Double handle door

MR41BT



Hot gas defrost

39" height with splashback
36" height without splashback

4 UNDERCOUNTERS & WORKTOPS

STANDARD FEATURES

<p>ELECTRICAL DOE</p>	<p>Electrical connection is 115V / 1ph / 60Hz</p>	<p>Cord and NEMA 5-15P plug</p>
<p>OPTIONS Cap.10 (Accessories & parts)</p>	<p>Stainless Steel wire shelves Drawer kit Single Overshelf</p>	<p>Double Overshelf 4" Whithout Backsplash Granite Top</p>

5. Prep tables





5 PRETTABLES

5. Prep tables

Sandwich / Salad prep tables

Models	Description
68 IRT-UC27P	1 Solid Door Refrigerator - 8 pans - 8 ft ³
IRT-UC36P	2 Solid Door Refrigerator - 12 pans - 11 ft ³
IRT-UC48P	2 Solid Door Refrigerator - 12 pans - 14 ft ³
IRT-UC60P	2 Solid Door Refrigerator - 16 pans - 17 ft ³
IRT-UC72P	3 Solid Door Refrigerator - 18 pans - 21 ft ³



Sandwich / Salad prep tables - Megatop

Models	Description
68 IRT-UC27PMT	1 Solid Door Refrigerator - 12 pans - Megatop - 8 ft ³
IRT-UC36PMT	2 Solid Door Refrigerator - 18 pans - Megatop - 11 ft ³
IRT-UC48PMT	2 Solid Door Refrigerator - 18 pans - Megatop - 14 ft ³
IRT-UC60PMT	2 Solid Door Refrigerator - 24 pans - Megatop - 17 ft ³
IRT-UC72PMT	3 Solid Door Refrigerator - 27 pans - Megatop - 21 ft ³



Pizza Prep tables

Models	Description
70 IRT-MR41EN	1 Solid Door Refrigerator - 7.8 ft ³
IRT-MR67EN	2 Solid Door Refrigerator - 17 ft ³
IRT-MR93EN	3 Solid Door Refrigerator - 27 ft ³
IRT-MR119EN	4 Solid Door Refrigerator - 39 ft ³



Granite top pizza prep tables

Models	Description
70 IUC-MR93-GT COMBO	2 Solid Door Refrigerator - 17 ft ³
IUC-MR67-GT COMBO	2 Solid Door Refrigerator - 17 ft ³
IRT-MPG1490 COMBO	3 Solid Door Refrigerator - 27 ft ³
IRT-MPG1980 COMBO	3 Solid Door Refrigerator - 27 ft ³



Specifications

Sandwich salad prep tables & Megatop

Exterior

- AISI 430 stainless steel.
- AISI 304 stainless steel top.

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & Zero ODP effect.

Doors

- Polyurethane insulated doors.
- Self-closing doors with stay-open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible doors.
- Door opening WxH: 23-1/4"x21-7/8" [UC27P]; 19-5/8"x21-7/8" [UC48P/UC72P]; 25-5/8"x217/8" [UC60P].
- Door opening WxH: 23-1/4"x21-7/8" [UC27PMT]; 19-5/8"x21-7/8" [UC48PMT/UC72PMT]; 25-5/8"x21-7/8" [UC60PMT].

Interior

- AISI 430 stainless steel.

Shelving

- [2] Two plastic coated wire shelves per section.

Refrigeration

- Temperature regulated by thermostatic control.
- Energy-saving non-electric condensate pan.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Forced air refrigeration system.
- Front-breathing refrigeration system.
- Refrigerant gas R290.



UC27P



UC48PMT



MR41 EN

Pizza prep tables

Exterior

- AISI 430 stainless steel.
- AISI 304 stainless steel top.
- Sealed interior floors and rounded cabinet corners.

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & Zero ODP effect.

Doors

- Polyurethane insulated doors.
- Self-closing doors with stay-open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible doors.
- Doors locks.
- Door opening WxH: 21-5/8" x 20-5/8".

Interior

- AISI 430 stainless steel.
- Internal drain plug for easy cleaning.

Shelving

- [2] Two plastic coated wire shelves per section with stainless steel tray slides included.
- Compatible with 12"x20" and 18"x26" pans.

Refrigeration

- Digital temperature controller with automatic defrost system.
- Energy-saving non-electric condensate pan.
- Extractable condensing unit for easy service.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Forced air refrigeration system.
- Refrigerant gas R290.



Triple chamber snap in door gasket for easy cleaning



Extractable side mounted condensing unit for easy service



Protected digital Controller, with automatic Defrost



Each guide supports 132 lb



Cutting board 9-1/2" depth



MR119 EN



MR93GT COMBO

Granite top pizza prep tables

Exterior

- AISI 430 stainless steel.
- AISI 304 stainless steel top.

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & Zero ODP effect.

Doors

- Polyurethane insulated doors.
- Self-closing doors with stay-open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Field reversible doors.
- Doors locks.

Interior

- AISI 430 stainless steel.
- Internal drain plug for easy cleaning.
- Sealed interior floors and rounded cabinet corners.

Shelving


- [1] One plastic coated wire shelves per door with stainless steel tray slides included.
- Compatible with 12"x20" pans.

Refrigeration

- Digital temperature controller with automatic defrost system.
- Extractable condensing unit for easy service.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Drain pan with condensate heater.
- Front-breathing refrigeration system.
- Refrigeration system independent for table and counter-top ingredient.
- Refrigerant gas R290.
- Expansion valve standard.

Sandwich/Salad prep tables

UC P Series






MOD.	Overall Dimensions			Doors	[°F]	[ft ³]	[HP]	115V [Amps]	[Lbs]	DOE
IRT-UC27P	27-3/4	30-1/8	46-1/4	1	35°F/41°F	8.0	1/4	3.9	300	Hydrocarbon R-290
IRT-UC36P	36-1/2	30-1/8	46-1/4	2	35°F/41°F	14.0	1/4	4.1	350	Hydrocarbon R-290
IRT-UC48P	48-1/2	30-1/8	46-1/4	2	35°F/41°F	14.0	1/4	4.1	400	Hydrocarbon R-290
IRT-UC60P	60-1/2	30-1/8	46-1/4	2	35°F/41°F	17.0	1/4	4.1	430	Hydrocarbon R-290
IRT-UC72P	72-5/8	30-1/8	46-1/4	3	35°F/41°F	21.0	1/3	4.6	506	Hydrocarbon R-290
IRT-UC27PMT	27-3/4	34-1/8	49	1	35°F/41°F	8.0	1/4	3.9	310	Hydrocarbon R-290
IRT-UC36PMT	36-1/8	34-1/8	49	2	35°F/41°F	14.0	1/4	4.1	360	Hydrocarbon R-290
IRT-UC48PMT	48-1/8	34-1/8	49	2	35°F/41°F	14.0	1/4	4.1	410	Hydrocarbon R-290
IRT-UC60PMT	60-3/8	34-1/8	49	2	35°F/41°F	17.0	1/4	4.1	500	Hydrocarbon R-290
IRT-UC72PMT	72-5/8	34-1/8	49	3	35°F/41°F	21.0	1/3	4.6	530	Hydrocarbon R-290

Height already includes 5-1/8" for casters

Sandwich/Salad prep tables MegaTop

UC PMT Series

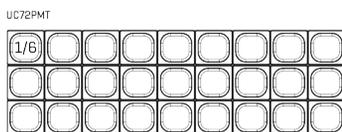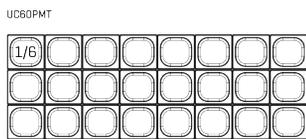

5 PREP TABLES

STANDARD FEATURES

<p>ELECTRICAL</p>	<p>Cord and NEMA 5-15P plug</p>	<p>Electrical connection is 115V / 1ph / 60Hz</p>
<p>OPTIONS</p>	<p>Drawer kit Flat lid Single overshelf</p>	<p>Double overshelf Set of 2" casters (locking on the front set)</p>

MR Series

Pizza prep tables
Granite Top Pizza prep tables

MR EN Series
MR GT Series



Protected digital Controller, with automatic Defrost



18" Work depth.



Two opening position, hinge reinforced.



Removable shelf. Universal slides



MOD.	Overall Dimensions			Doors	[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
IRT-MR41EN	41-3/8	32-5/8	43-5/64	1/1	35°F/41°F	7.8	1/4	4.1	370	Hydrocarbon R-290
IRT-MR67EN	67-3/8	32-5/8	43-5/64	2/2	35°F/41°F	17.0	1/3	4.6	580	Hydrocarbon R-290
IRT-MR93EN	93-1/4	32-5/8	43-5/64	3/2	35°F/41°F	27	3/4	7.7	690	Hydrocarbon R-290
IRT-MR119EN	119-1/4	32-5/8	43-5/64	4/3	35°F/41°F	39.0	3/4	7.7	800	Hydrocarbon R-290
IRT-MR93-GT COMBO	93-1/4	32-5/8	62-1/8	3	35°F/41°F	27.0	1/2	6.2	1260	Hydrocarbon R-290
IRT-MR67-GT COMBO	67-3/8	32-5/8	62-1/8	2	35°F/41°F	17.0	3/8	7.1	950	Hydrocarbon R-290
IRT-MPG1490 COMBO	58-5/8	27-1/2	42-7/8 60-1/10	2	33°F/38°F 39°F/41°F	10.4	1/4	6.1	520	Hydrocarbon R-290
IRT-MPG1980 COMBO	78	27-1/2	42-7/8 60-1/10	3	33°F/38°F 39°F/41°F	2.36	1/6	1.82	190	Hydrocarbon R-290

Height already includes 5-1/8" for casters

MPG Series


Granite Top Pizza prep tables

MPG Series

IUC-MR67GT COMBO



1.18" Granite top comes fully assembled

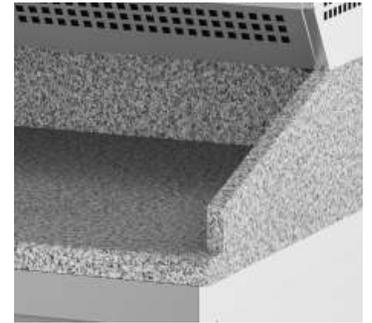

IRT-MPG1980 COMBO



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug. Electrical connection is 115V / 1ph / 60Hz.	
OPTIONS	MR-EN Stainless steel wire shelves Additional slide kits Drawer kit Single Overshelf Double Overshelf	MR-GT / MPG Stainless steel wire shelves Additional slide kits


6. Counter top display cases





6 COUNTER TOP
DISPLAY CASES

6. Counter top display cases

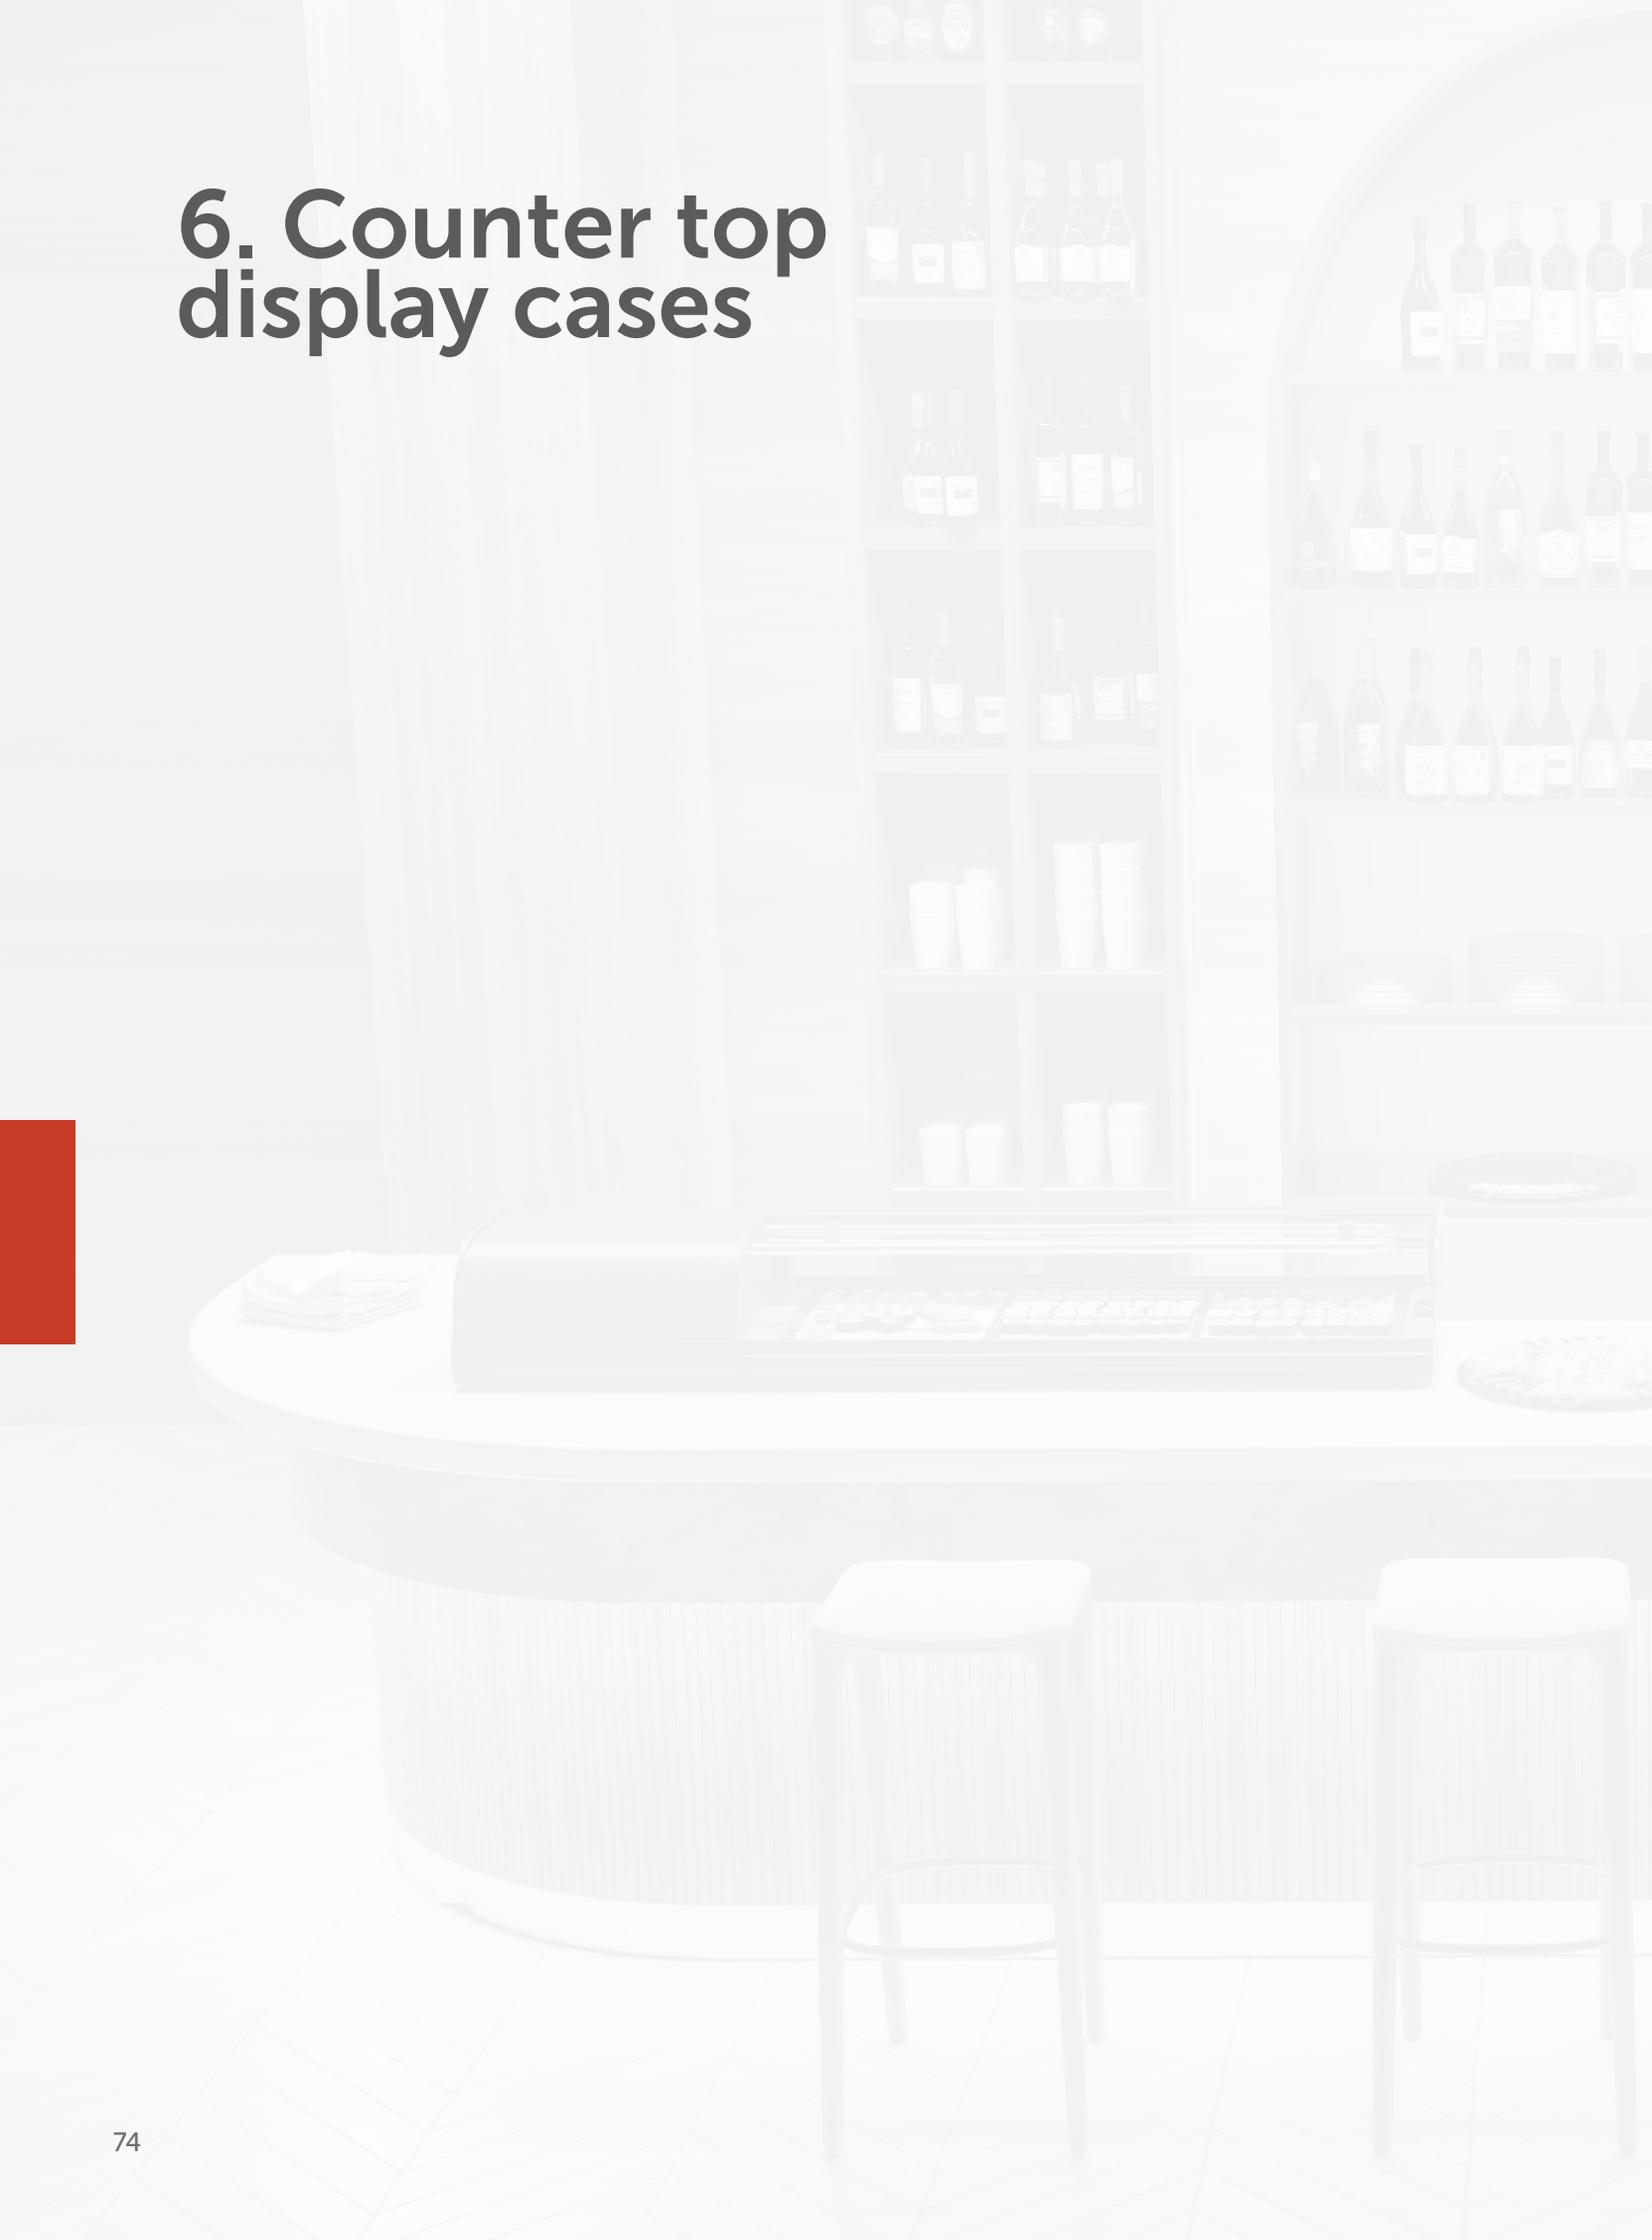

Refrigerated Ingredient cases

78

Models

- VIP 1330 1/3 C GLASSTOP
- VIP 1490 1/3 C GLASSTOP
- VIP 1740 1/3 C GLASSTOP
- VIP 1980 1/3 C GLASSTOP
- VIP 2300 1/3 C GLASSTOP
- VIP 1330 1/3 T SOLID LID
- VIP 1490 1/3 T SOLID LID
- VIP 1740 1/3 T SOLID LID
- VIP 1980 1/3 T SOLID LID
- VIP 2300 1/3 T SOLID LID

Description

- Pizza ingredient displays - 4 pans - Glass
- Pizza ingredient displays - 5 pans - Glass
- Pizza ingredient displays - 6 pans - Glass
- Pizza ingredient displays - 8 pans - Glass
- Pizza ingredient displays - 10 pans - Glass
- Pizza ingredient displays - 4 pans - Solid Lid
- Pizza ingredient displays - 5 pans - Solid Lid
- Pizza ingredient displays - 6 pans - Solid Lid
- Pizza ingredient displays - 8 pans - Solid Lid
- Pizza ingredient displays - 10 pans - Solid Lid



Sushi cases

Models

79

- VSU4P
- VSU6P
- VSU8P
- VSU4PR
- VSU6PR
- VSU8PR

Description

- Left side condensing unit - Width 50"
- Left side condensing unit - Width 63-3/4"
- Left side condensing unit - Width 77-5/8"
- Right side condensing unit - Width 50"
- Right side condensing unit - Width 63-3/4"
- Right side condensing unit - Width 77-5/8"



6 COUNTER TOP DISPLAY CASES

Specifications



VSU 4P



VSU 8PR

Counter top sushi display cases

Exterior

- AISI 304 stainless steel.
- Rear sliding doors, included.
- Anodized aluminum silver profile.
- Levelling feet.

Interior

- AISI 304 stainless steel.
- Internal drain plug for easy cleaning.
- Led lighting in top profile.

Insulation

- CFC-free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & ZERO ODP effect.

Refrigeration

- Digital temperature controller.
- Manual defrost system.
- Gravity coil on top and cold plate refrigeration system on the bottom.
- Refrigerant gas R290.

Electrical

- Cord and nema 5-15p plug.
- Electrical connection is 115v / 1ph / 60hz.



**VIP1740 1/3 C
Glasstop**

**VIP1980 1/3 C
Solid Lid**

Counter top ingredient cases

Exterior

- AISI 304 stainless steel.
- Safety glass on the top, closed in the front (facing the customer) and open in the back facing the operator).
- Sliding doors on the back.
- Levelling feet.

Interior

- AISI 304 stainless steel.
- Stainless steel 6" deep pans, included.

Insulation

- CFC-free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & ZERO ODP effect.

Refrigeration

- Digital temperature controller with automatic defrost system.
- Cold wall refrigeration system.
- Refrigerant gas R600A.

Electrical

- Cord and nema 5-15p plug.
- Electrical connection is 115v / 1ph / 60hz.

VIP Series

Countertop refrigerated display cases

VIP Series


VIP1490 1/3 C GLASSTOP




VIP1980 1/3 T SOLID LID



VIP 1330 1/3
(501X13) = 1 (501X11) = 3




VIP 1740 1/3
(501X13) = 1 (501X11) = 5



VIP 1490 1/3
(501X13) = 1 (501X11) = 4



VIP 1980 1/3
(501X11) = 8



MOD.	Overall Dimensions			Pans	[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
VIP1330 1/3 C GLASSTOP	52-5/16	16-5/16	17-11/16	4	39°F/41°F	1.30	1/6	1.82	142	Hydrocarbon R-600a
VIP1490 1/3 C GLASSTOP	58-3/4	16-5/16	17-11/16	5	39°F/41°F	1.55	1/6	1.82	160	Hydrocarbon R-600a
VIP1704 1/3 C GLASSTOP	68-1/4	16-5/16	17-11/16	6	39°F/41°F	1.83	1/6	1.82	165	Hydrocarbon R-600a
VIP1980 1/3 C GLASSTOP	77-13/16	16-5/16	17-11/16	8	39°F/41°F	2.36	1/6	1.82	190	Hydrocarbon R-600a
VIP2300 1/3 C GLASSTOP	90-1/2	16-1/4	17-3/4	10	39°F/41°F	2.86	1/6	1.82	174	Hydrocarbon R-600a
VIP1330 1/3 T SOLID LID	52-5/16	16-5/16	10-1/4	4	39°F/41°F	1.30	1/6	1.82	115	Hydrocarbon R-600a
VIP1490 1/3 T SOLID LID	58-3/4	16-5/16	10-1/4	5	39°F/41°F	1.55	1/6	1.82	131	Hydrocarbon R-600a
VIP1740 1/3 T SOLID LID	68-1/4	16-5/16	10-1/4	6	39°F/41°F	1.83	1/6	1.82	140	Hydrocarbon R-600a
VIP1980 1/3 T SOLID LID	77-13/16	16-5/16	10-1/4	8	39°F/41°F	2.36	1/6	1.82	160	Hydrocarbon R-600a
VIP2300 1/3 C SOLID LID	90-1/2	16-1/4	10-1/4	10	39°F/41°F	2.86	1/6	1.82	174	Hydrocarbon R-600a

Countertop Sushi cases

VSU Series

VSU 4P



VSU 6PR



VSU 8PR



COUNTERTOP
6
DISPLAY CASES

MOD.									
	Overall Dimensions			[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
VSU 4P	50-1/4	16-1/8	9-1/8	30°F/34°F	0.56	1/8	3.2	115	Hydrocarbon R-290
VSU 6P	64-1/16	16-1/8	9-1/8	30°F/34°F	0.84	1/8	3.4	139	Hydrocarbon R-290
VSU 8P	77-15/16	16-1/8	9-1/8	30°F/34°F	1.14	1/8	3.8	180	Hydrocarbon R-290
VSU 4PR	50-1/4	16-1/8	9-1/8	30°F/34°F	0.56	1/8	3.2	115	Hydrocarbon R-290
VSU 6PR	64-1/16	16-1/8	9-1/8	30°F/34°F	0.84	1/8	3.4	139	Hydrocarbon R-290
VSU 8PR	77-15/16	16-1/8	9-1/8	30°F/34°F	1.14	1/8	3.8	180	Hydrocarbon R-290

Important: ONLY place refrigerated product! For daily cleaning, remove product and disconnect unit.

7. Beverage Coolers





7 BEVERAGE COOLERS

7. Beverage Coolers

Back Bar coolers

Models	Description
86 IMD-ERV36IIGD	Back bar cooler - 1 glass door
IMD-ERV60IIGD	Back bar cooler - 2 glass door
IMD-ERV84IIGD	Back bar cooler - 3 glass door
IMD-ERV36IISD	Back bar cooler - 1 solid door
IMD-ERV60IISD	Back bar cooler - 2 solid door
IMD-ERV84IISD	Back bar cooler - 3 solid door
IMD-ERV15 IIGD	Narrow back bar cooler - 1 glass door
IMD-ERV25 IIGD	Narrow back bar cooler - 2 glass door
IMD-ERV35 IIGD	Narrow back bar cooler - 3 glass door
IMD-ERV15 IISD	Narrow back bar cooler - 1 solid door
IMD-ERV25 IISD	Narrow back bar cooler - 2 solid door
IMD-ERV35 IISD	Narrow back bar cooler - 3 solid door

Models	Description
86 IMD-ERV15 GD	Narrow back bar cooler black 1 glass door
IMD-ERV25 GD	Narrow back bar cooler black 2 glass door
IMD-ERV35 GD	Narrow back bar cooler black 3 glass door
IMD-ERV15 SD	Narrow back bar cooler black 1 solid door
IMD-ERV25 SD	Narrow back bar cooler black 2 solid door
IMD-ERV35 SD	Narrow back bar cooler black 3 solid door
IMD-ERV25 C	Narrow back bar cooler black 2 glass sliding door



Merchandisers

Models	Description
88 IMD-ERV 53	Hinged door merchandiser - 1 glass door
IMD-ERV 83	Hinged door merchandiser - 2 glass door
IMD-NEC501RV	Hinged door merchandiser - 1 glass door
IMD-NEC501FV	Hinged door merchandiser freezer - 1 glass door
IMD-ERC 100	Sliding door merchandiser - 2 glass door
IMD-ERC 130	Sliding doors minimarket - 2 glass door
IMD-ERC 200	Sliding doors minimarket - 3 glass door
90 IMD-ERC50PH	Hinged doors minimarket - 1 glass door
IMD-ERC130PH	Hinged doors minimarket - 2 glass door
IMD-ERC200PH	Hinged doors minimarket - 3 glass door
IMD-ERC50PHBT	Hinged doors minimarket freezer - 1 glass door
IMD-ERC130PHBT	Hinged doors minimarket freezer - 2 glass door
IMD-ERC200PHBT	Hinged doors minimarket freezer - 3 glass door



SuperCooler

Models

Description

92

IMD-SPC501
IMD-SPC501B

Supercooler stainless steel 1 glass door
Supercooler black 1 glass door



Models

Description

93

IMD-BC48
IMD-BC72

Bottle Cooler 48"
Bottle Cooler 72"



Bar Station

Models

Description

94

IMD-BST1600R Single service cocktail bar station refrigerated
IMD-BST2000R Double service cocktail bar station refrigerated
IMD-BST1200N Single service cocktail bar station neutral
IMD-BST1600N Single service cocktail bar station neutral
IMD-BST2000N Double service cocktail bar station neutral



Specifications



Standard lock



Removable top to fit 34" counter height



Protected digital controller



ERV36 II SD



ERV15 II GD



ERV35 II GD



BST200

Back bar coolers

Exterior

- AISI 430 stainless steel.

Interior

- AISI 430 Stainless Steel.
- Sealed interior floors.

Insulation

- CFC-Free polyurethane insulation, entire cabinet structure is foamed-in place using a high density polyurethane insulation.
- Low GWP & Zero ODP effect.

Shelving

- Two plastic coated wire shelves per section.

Doors

- Self-closing doors with stay-open feature.
- Stainless Steel heavy-duty hinges.
- Triple chamber snap in door gaskets for easy removal and cleaning.
- Doors locks.
- Full-height door opening:
WxH= 19-5/8"x26-7/8".

Refrigeration

- Digital temperature controller with automatic defrost system.
- Energy-saving non-electric condensate pan
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Forced air refrigeration system.
- Monoblok.



Light Canopy



Digital Controller



DOOR



ERC130



ERC200PH

Narrow back bar coolers

Exterior

- AISI 430 stainless steel.

Interior

- Grey coated steel.
- Interior lighting / LED.
- Plastic coated wire shelves, adjustable height and easy removal.

Insulation

- Free CFC's high density (40kg/m3) polyurethane insulation with low GWP & zero ODP effect.

Doors

- Doors with double glass (6-10-4).
- Integrated lock.
- Easy removal gasket.
- Integrated handle doors.

Refrigeration

- Forced air refrigeration system.
- Evaporator coil coated with anti-corrosion material 100% Polyester.
- Evaporative tray.

Back bar coolers
Narrow back bar coolers

ERV Series

ERV Series
ERV INOX Series

IMD-ERV60IIGD

Standard door lock

Wine Shelves
 PARRERV
 [optional]



Double pane glass (6-15-5)



Protected digital controller



Monoblock refrigeration system

Removable top to fit 34" counter height



IMD-ERV36IISD



MOD.	Overall Dimensions			Doors	[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
IMD-ERV36IIGD	36-1/4	23-3/4	34-1/2	1	33°F/38°F	5.72	1/5	3,8	280	Hydrocarbon R-290
IMD-ERV60IIGD	60-3/4	23-3/4	34-1/2	2	33°F/38°F	12.78	1/5	5,2	330	Hydrocarbon R-290
IMD-ERV84IIGD	85-1/4	23-3/4	34-1/2	3	33°F/38°F	19.85	1/3	6	500	Hydrocarbon R-290
IMD-ERV36IISD	36-1/4	23-3/4	34-1/2	1	33°F/38°F	5.72	1/5	3,8	280	Hydrocarbon R-290
IMD-ERV60IISD	60-3/4	23-3/4	34-1/2	2	33°F/38°F	12.78	1/5	5	330	Hydrocarbon R-290
IMD-ERV84IISD	85-1/4	23-3/4	34-1/2	3	33°F/38°F	19.85	1/3	5,7	500	Hydrocarbon R-290
IMD-ERV15 IIGD	23-3/4	20-1/8	35-3/4	1	39°F/54°F	5	1/6	3	152	Hydrocarbon R-290
IMD-ERV25 IIGD	35-1/2	20-1/8	35-3/4	2	39°F/54°F	8	1/5	3,4	202	Hydrocarbon R-290
IMD-ERV35 IIGD	53-1/4	20-1/8	35-3/4	3	39°F/54°F	11.6	1/4	3	284	Hydrocarbon R-290
IMD-ERV15 IISD	23-3/4	20-1/8	35-3/4	1	39°F/54°F	5	1/6	3	152	Hydrocarbon R-290
IMD-ERV25 IISD	35-1/2	20-1/8	35-3/4	2	39°F/54°F	8	1/5	3,4	202	Hydrocarbon R-290
IMD-ERV35 IISD	53-1/4	20-1/8	35-3/4	3	39°F/54°F	11.6	1/4	3	284	Hydrocarbon R-290
IMD-ERV25 C [Sliding]	35-1/2	20-1/8	35-3/4	2	39°F/54°F	8	1/5	3,4	202	Hydrocarbon R-290
IMD-ERV15 GD	23-3/4	20-1/8	35-3/4	1	39°F/54°F	5	1/5	3	152	Hydrocarbon R-290
IMD-ERV25 GD	35-1/2	20-1/8	35-3/4	2	39°F/54°F	8	1/5	3,4	202	Hydrocarbon R-290
IMD-ERV35 GD	53-1/4	20-1/8	35-3/4	3	39°F/54°F	11.6	1/4	4,10	284	Hydrocarbon R-290
IMD-ERV15 SD	23-3/4	20-1/8	35-3/4	1	33°F/38°F	5	1/5	3	280	Hydrocarbon R-290
IMD-ERV25 SD	35-1/2	20-1/8	35-3/4	2	33°F/38°F	8	1/5	3,4	330	Hydrocarbon R-290
IMD-ERV35 SD	53-1/4	20-1/8	35-3/4	3	33°F/38°F	11,6	1/4	4,6	500	Hydrocarbon R-290

Narrow back bar coolers stainless steel and black finish

ERV Series

IMD-ERV35IIGD



RGB LED lighting
[standard]

IMD-ERV25 C (Sliding Doors)
IMD-ERV25 GD



RGB LED lighting
[standard]



IMD-ERV25 IISD

IMD-ERV25 SD



STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug. Electrical connection is 115V / 1ph / 60Hz.
OPTIONS	Set of 4" casters, front locking.

ERC Series

Hinged glass doors merchandiser

ERC Series

IMD-ERV83

Narrow



IMD-ERV53

Narrow

Hinged glass doors



IMD-NEC501FV

Hinged glass doors



OPTIONAL COLORS

- White
Optional
- Black
Standard



MOD.	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
IMD-ERV53	23-5/8	20-1/8	73-5/8	1	39°F/54°F	10	1/4	3,5	152	Hydrocarbon R-290
IMD-ERV83	35-1/2	20-1/8	73-3/4	2	39°F/54°F	15	1/3	4,98	202	Hydrocarbon R-290
IMD-NEC501RV	27	27-3/8	79-1/8	1	39°F/46°F	15	1/3	5	300	Hydrocarbon R-290
IMD-NEC501FV	27	27-3/8	79-1/8	1	5°F/-13°F	15	3/4	9	300	Hydrocarbon R-290
IMD-ERC 100	27-3/4	33-1/8	78-7/8	2	39°F/46°F	40	3/4	8,7	350	Hydrocarbon R-290
IMD-ERC 130	31-5/8	33-1/8	78-7/8	2	39°F/46°F	46	3/4	9,2	600	Hydrocarbon R-290
IMD-ERC 200	31-5/8	33-1/8	78-7/8	3	39°F/46°F	72	1	10,8	820	Hydrocarbon R-290

Sliding doors merchandiser

ERC Series

IMD-ERC130



Sliding glass doors

IMD-ERC200



Sliding glass doors

OPTIONAL COLORS

- White
Optional
- Black
Standard

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug, Electrical connection is 115V / 1ph / 60Hz.
-------------------	--

ERC Series

Hinged doors merchandiser

ERC Series



IMD-ERC 200 PH



IMD-ERC 50 PH



IMD-ERC130 PH

**OPTIONAL
CUSTOMIZED**

White
Optional

Black
Standard

MOD.	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
IMD-ERC 50PH	27-1/8	33-1/8	78-7/8	1	39°F/46°F	17	1/2	2,67	343	Hydrocarbon R-290
IMD-ERC 50PH BT	27-1/8	33-1/8	78-7/8	1	-0°F	17	1/2	4,24	376	Hydrocarbon R-290
IMD-ERC 130PH	54-1/2	33-1/8	78-7/8	2	39°F/46°F	40	3/4	9,88	386	Hydrocarbon R-290
IMD-ERC 200PH	81-7/8	33-1/8	78-7/8	3	39°F/46°F	63	1	10,5	564	Hydrocarbon R-290
IMD-ERC 130PH BT	54-1/2	33-1/8	78-7/8	2	-0°F	40	1-1/4	11,37	408	Hydrocarbon R-290
IMD-ERC 200PH BT	81-7/8	33-1/8	78-7/8	3	-0°F	63	1-1/4+ 1-1/4	22,08	577	Hydrocarbon R-290



7 BEVERAGE COOLERS

SPC Series

Supercooler Beer Refrigerator

SPC Series



32°
17,6°F

Non-freezing
liquid
drinks

2h

Temperatures
bellow zero
in less than 2h.



Technology
applicable
for all types
of beverages



250
bottles

IMD-SPC501



IMD-SPC501B



ECO
EFFICIENT
R290


MOD.	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V (Amps)	[Lbs]	DOE
IMD-SPC501	27	27.6	78-7/8	1	32°F/17.6°F	17	3/4	8,31	300	Hydrocarbon R-290
IMD-SPC501B	27	27.6	78-7/8	1	32°F/17.6°F	17	3/4	8,31	300	Hydrocarbon R-290

BC Series

Infrico Food Service Equipment '26

Bootle Coolers

BC Series

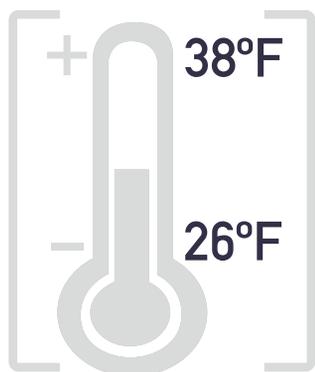

IMD-BC48



IMD-BC72



7 BEVERAGE COOLERS

MOD.	Overall Dimensions			Doors	[°F]	[ft ³]	[HP]	115V [Amps]	[Lbs]	DOE
IMD-BC48	48	26	30	2	26°F/38°F	11,8	1/4	4,1	275	Hydrocarbon R-290
IMD-BC72	72	26	30	3	26°F/38°F	19	1/4	4,1	415	Hydrocarbon R-290


BAR Station



IMD-BST1600R



IMD-BST1200N

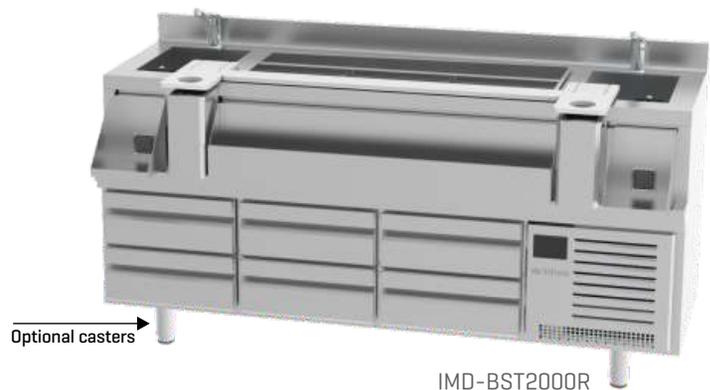

IMD-BST2000R

MOD.	Overall Dimensions			Shelves	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
IMD-BST1600R	63	33-5/8	41-5/8	4	28.4°F/46.4°F	9	1/3	1.57	452	Hydrocarbon R-290
IMD-BST2000R	78-3/4	33-5/8	41-5/8	6	28.4°F/46.4°F	11	1/3	1.57	533	Hydrocarbon R-290
IMD-BST1200N	47-1/4	33-5/8	37-1/8	-	Neutral	-	-	-	172	-
IMD-BST1600N	63	33-5/8	37-1/8	-	Neutral	-	-	-	205	-
IMD-BST2000N	78-3/4	33-5/8	37-1/8	-	Neutral	-	-	-	236	-



7 BEVERAGE COOLERS

8. Wine cabinets





8. Wine cabinets



Wine Cellars/Retro-Wine cellars

Models	Description
100 IMD-EVV50B	Wine cellar - 1 glass door black 50 bottles
IMD-EVV70	Wine cellar - 1 glass door black 70 bottles
IMD-EVV90B	Wine cellar - 1 glass door black 90 bottles
IMD-EVV100	Wine cellar- 1 glass door 100 bottles
IMD-EVV200MX	Wine cellar- 2 glass door dual zone 200 bottles
IMD-EVV23R1G	Single glass door refrigerator, vintage series
IMD-EVV49R2G	Double glass door refrigerator, vintage series




Wine cellars EVV Series

Wine cellars

EVV Series

IMD-EVV100

Standard Shelves

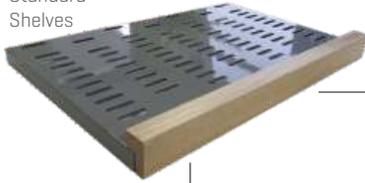

STANDARD FINISH

Black
Standard




IMD-EVV90B
5 Standard Shelves



Option Shelves

EVV 50B-70-90B: 203R36_01
EVV 100-200MX: 203R34_01

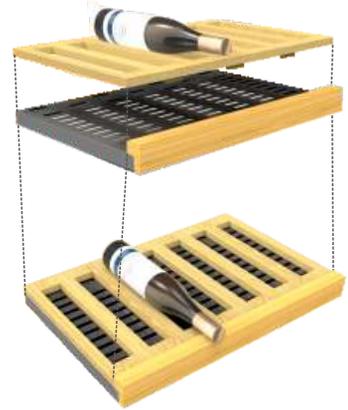

STANDARD FINISH

Black
Standard

OPTIONAL FINISHES

White
Optional

Black
Standard

Cherry
Standard



IMD-EVV50B

	MOD.	Overall Dimensions	Doors	Bottles	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
NEW	IMD-EVV50B	23-5/8 26-3/4 32-1/2	1	50	39°F/64°F	5	1/4	2.46	177	Hydrocarbon R-600a
	IMD-EVV70	23-5/8 26-3/4 64-1/2	1	70	39°F/64°F	12	1/4	1.98	246	Hydrocarbon R-290
NEW	IMD-EVV90B	23-5/8 26-3/4 72-1/2	1	90	39°F/64°F	12	1/4	4.3	309	Hydrocarbon R-290
	IMD-EVV100	25-7/8 23-1/2 75-1/2	1	100	39°F/64°F	12	1/4	4.2	360	Hydrocarbon R-290
	IMD-EVV200MX	51-3/4 23-1/2 75-1/2	2	100+100	39°F/64°F	12+12	1/4+1/4	8.4	630	Hydrocarbon R-290
	IMD-EVV23R1G	27-1/8 23-5/8 80	1	90	39°F/64°F	11.3	1/3	4.5	310	Hydrocarbon R-290
	IMD-EVV49R2G	54-1/2 23-5/8 80	2	90+90	39°F/64°F	22.6	1/3+1/3	6.65	580	Hydrocarbon R-290

VINTAGE Series

Infrico Food Service Equipment '26

Retro-refrigerator

VINTAGE Series



IMD-EVV49R2G




IMD-EVV23R1G



Standard Shelves

OPTIONAL FINISHES

- White
Optional
- Black
Standard
- Cherry
Standard

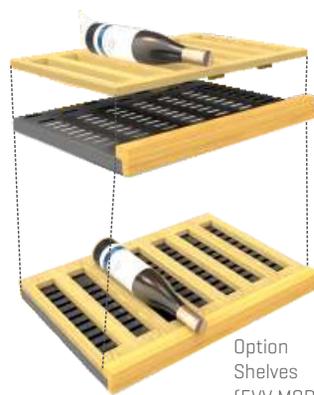

Option Shelves [EWV MODEL]

8 WINE CABINET

STANDARD FEATURES

ELECTRICAL	Cord and NEMA 5-15P plug. Electrical connection is 115V / 1ph / 60Hz.
OPTIONS	Set of wood shelves [grills] Set of metal shelves [grills]


9. Dry aging





9 DRY AGING MEAT

9. Dry aging

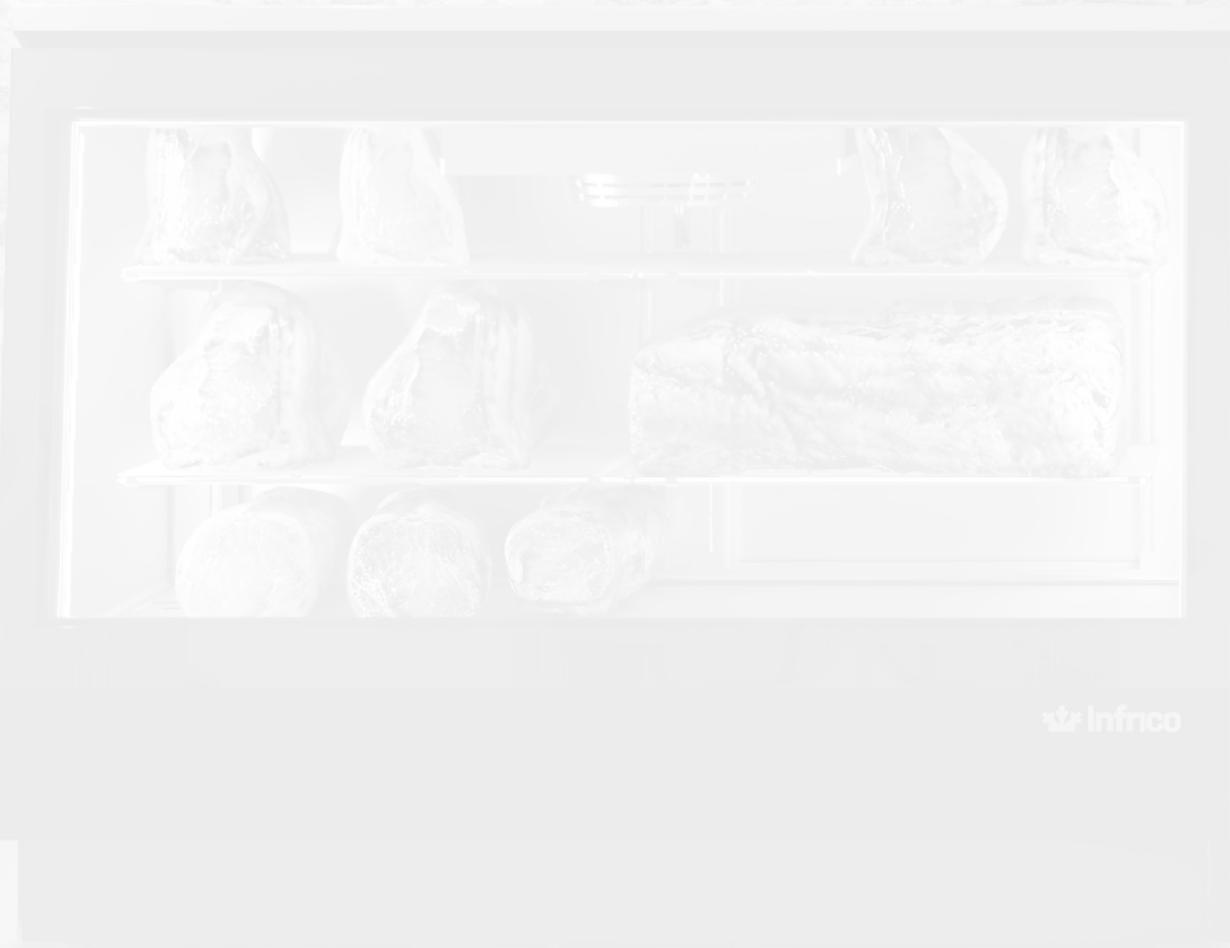



Dry aging meat cabinet

	Models	Description
108	IMD-AGB701MDA	Dry aging meat cabinet- 1 glass door
	IMD-AGB1402MDA	Dry aging meat cabinet- 2 glass door
	IMD-AGB701MDAB	Dry aging meat cabinet- 1 glass door
	IMD-AGB1402MDAB	Dry aging meat cabinet- 2 glass door
	IMD-VC1400MDA	Dry aging Vision counter case
	IMD-VC1400MDAB	Dry aging Vision counter case
	IMD-VC2010MDA	Dry aging Vision counter case
110	IMD-VC2010MDAB	Dry aging Vision counter case
	IMD-AC140MDAB	Counter top dry aging meat cabinet
	IMD-AC280MDAB	Slim series dry aging meat cabinet



9 DRY AGING MEAT

Our highly efficient controllers allow the atmosphere to be maintained at a specific and stable temperature and humidity for the correct maturation of the meat.

Proper airflow, the careful arrangement of pieces with adequate spacing, and precise control of water evaporation from within the muscles are essential to the process. This results in the loss of about one-fifth of the volume while intensifying the flavors

The ideal environment is 37.5°F with a humidity between 50-60% and the pieces must remain for at least 28 days, although each type of meat is different.



ANTIBACTERIAL



CONTROL
TEMPERATURE



LED MEAT
LIGHTING



HUMIDITY
CONTROL



AIR FLOW



Quality and Flavour



The maturation process occurs in a controlled environment, where the meat is exposed to carefully regulated conditions of temperature, humidity, and air quality.

With our maturation process, meat achieves unbeatable tenderness, flavor, and juiciness. This time-honored technique has been modernized by Infrico, allowing our customers to age their meat to perfection and showcase these little gems that are sure to impress their guests.

AGB Series

Dry aging meat cabinets

AGB Series

IMD-AGB1402MDA



IMD-AGB701MDAB



MOD.	Overall Dimensions			Doors	°F	ft ³	HP	115V	Lbs	DOE
IRR-AGB701MDA	27	31-3/8	83-1/2	1	32°F/61°F	19,7	1/3	7,20	370	Hydrocarbon R-290
IRR-AGB701MDAB	27	31-3/8	83-1/2	1	32°F/61°F	19,7	1/3	7,20	370	Hydrocarbon R-290
IRR-AGB1402MDA	54-3/8	31-3/8	83-1/2	2	32°F/61°F	27,7	3/4	12,54	458	Hydrocarbon R-290
IRR-AGB1402MDAB	54-3/8	31-3/8	83-1/2	2	32°F/61°F	27,7	3/4	12,54	458	Hydrocarbon R-290
IMD-VC1400MDA	54-1/2	29-3/8	41-5/8	2	32°F/61°F	16,6	1/3	9,61	343	Hydrocarbon R-290
IMD-VC1400MDAB	54-1/2	29-3/8	41-5/8	2	32°F/61°F	16,6	1/3	9,61	343	Hydrocarbon R-290
IMD-VC2010MDA	79-1/8	29-3/8	41-5/8	3	32°F/61°F	25,07	1/3	9,66	467	Hydrocarbon R-290
IMD-VC2010MDAB	79-1/8	29-3/8	41-5/8	3	32°F/61°F	25,07	1/3	9,66	467	Hydrocarbon R-290

Dry aging meat cabinets

VC Series

VC Series

IMD-VC2010MDAB



Back Doors



IMD-VC1400MDA

9 DRY AGING MEAT

STANDARD FEATURES

<p>ELECTRICAL</p>	<p>Cord and NEMA 5-15P plug. Electrical connection is 115V / 1ph / 60Hz.</p>		
<p>OPTIONS</p>	<p>Back Glass Door</p>	<p>Solid door lock Glass door lock Meat Bar Seat</p>	<p>UVC + Ozone Sterilaser Operating digital control bluetooth or wifi Additional shelves</p>

AC Series

Dry aging meat cabinets

AC Series

IMD-AC280MDAB



IMD-AC140MDAB



MOD.	Overall Dimensions			Doors	[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
IMD-AC140MDAB	23-5/8	25-7/8	32-1/4	1	32°F/61°F	4,97	1/8	3,42	187	Hydrocarbon R-600a
IMD-AC280MDAB	23-5/8	24-7/8	64-5/8	1	32°F/61°F	12	1/3	7,65	458	Hydrocarbon R-290



9 DRY AGING MEAT

10. Pastry and gelato display cases





PASTRY AND
10 GELATO DISPLAY
CASES

10. Pastry and gelato display cases



Display cases

	Models	Description
118	IDC-VBR9IR	Pastry disp. cases curved glass
	IDC-VBR12IR	Pastry disp. cases curved glass
	IDC-VBR18IR	Pastry disp. cases curved glass
	IDC-VBR9ISS	Pastry disp. cases curved glass
	IDC-VBR12ISS	Pastry disp. cases curved glass
	IDC-VBR18ISS	Pastry disp. cases curved glass
	IDC-VBR9IPR	Pastry disp. cases straight glass
	IDC-VBR12IPR	Pastry disp. cases straight glass
	IDC-VBR18IPR	Pastry disp. cases straight glass
119	IDC-VON9PR	Pastry disp. cases straight glass
	IDC-VON12PR	Pastry disp. cases straight glass
	IDC-VON18PR	Pastry disp. cases straight glass
120	IDC-VC09	Pastry disp. cases straight glass combo series
	IDC-VC012	Pastry disp. cases straight glass combo series
	IDC-VC015	Pastry disp. cases straight glass combo series
	IDC-VC018	Pastry disp. cases straight glass combo series



Gelato & Ice Cream

	Models	Description
122	IDC-VAR12H	Gelato curved glass - Width 46" - 6.4 ft3
	IDC-VAR18H	Gelato curved glass - Width 66-1/8" - 8.1 ft3
	IDC-VAR24H	Gelato curved glass - Width 86-1/4" - 9.7 ft3
	IDC-VCB12H	Gelato flat glass- Width 46" - 6.4 ft3
	IDC-VCB18H	Gelato flat glass - Width 66-1/8" - 8.1 ft3
	IDC-VCB24H	Gelato flat glass - Width 86-1/4" - 9.7 ft3
	IDC-VBZ12SU	Ice Cream flat glass- Width 49-1/5" - 8-5/9 ft3
	IDC-VBZ15SU	Ice Cream flat glass - Width 61-1/2" - 12-5/6 ft3
	IDC-VBZ12U	Ice Cream flat glass - Width 49-1/5" - 7-2/5 ft3
	IDC-VBZ15U	Ice Cream flat glass - Width 61-1/2" - 9-1/4 ft3



Vision Counter Case

	Models	Description
124	IDC-VC1400	Vision Counter case stainless steel
	IDC-VC2010	Vision Counter case stainless steel
	IDC-VC1400B	Vision Counter case black
	IDC-VC2010B	Vision Counter case black



Specifications



Led Lighting



Stainless Steel Worktop



VC 1400



VBR12IR




VBR18ISS

Vision Counter Case

- Wide product range for all types of commercial sales.
- Full visibility of display products.
- Illuminated glass middle shelf.
- Double row led lighting.
- Exhibition area in AISI 304 stainless steel.
- Front glass for easy access to exhibition and cleaning plan.

VBR Pastry display cases

- Flexibility of layout to combine different types of sales.
- High capacity with four exposure levels.
- Folding front tempered glass.
- Interior exhibition in AISI 304 stainless steel.
- Glass shelves with anodized aluminium profile.
- High pressure injected polyurethane insulation, CFC-free.
- Front decoration in water-repellent DM high resistance lacquer.
- Electronic control.
- Automatic defrosting.
- 6000K led lighting on exposure, shelves and decorative.
- Night curtain [SS model].

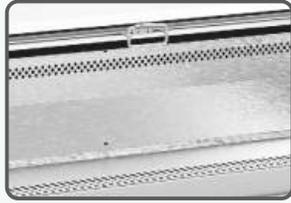

Night curtain [VBR SS]




Back doors [VBR R/PR]



VBR12IPR



VCO15

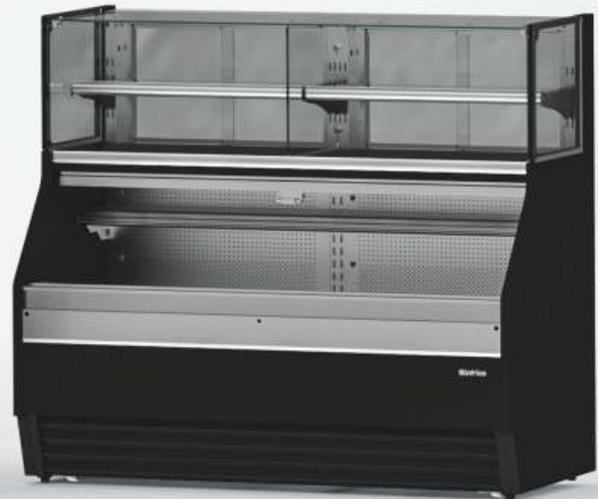

VCO dual service display cases for bakery

- Dual service: refrigerated and ambient temperature.
- Neutral upper display area for the display and sale of neutral bakery product.
- Bottom display area for self-service refrigerated product sales.
- Perfect mix for cross-selling in your sales area.
- High capacity with 2 display levels.

Lower area

- Module with built-in group.
- High capacity with two exposure levels.
- Interior in epoxy painted steel.
- Front & side decoration in water-repellent DM high resistance lacquer.
- High pressure injected polyurethane insulation, CFC's free.
- Electronic control.
- Night curtain.
- Automatic defrosting.
- Led lighting cold white 6000K on exposition deck.

Upper area

- Neutral module
- Tempered front glass
- Rear sliding doors
- Double side glass
- Glass top shelf
- Anodized aluminium profiles

VBR Series

Pastry display cases

VBR Ambar/VBR PR Ambar Series

IDC-VBR12IR



Rear sliding doors with stay open feature



Night curtain Standard and front brackets



IDC-VBR18ISS



IDC-VBR12IPR



**EACH SHELF
HOLDS UP TO
45 LBS**

MOD.	Overall Dimensions			Doors	(°F)	(ft ³)	(HP)	115V	[Lbs]	DOE
IDC-VBR9IR	37	31-17/32	50-23/32	2	30°F/45°F	10.0	1	7.2	397	Hydrocarbon R-290
IDC-VBR12IR	49-1/5	31-17/32	50-23/32	2	30°F/45°F	13.0	1	7.3	428	Hydrocarbon R-290
IDC-VBR18IR	73-5/6	31-17/32	50-23/32	3	30°F/45°F	20.0	1/2	12.7	467	Hydrocarbon R-290
IDC-VBR9ISS	37	31-17/32	50-23/32		30°F/45°F	10.0	1/2	5	397	Hydrocarbon R-290
IDC-VBR12ISS	49-1/5	31-17/32	50-23/32		30°F/45°F	13.0	3/4	5.1	428	Hydrocarbon R-290
IDC-VBR18ISS	73-5/6	31-17/32	50-23/32		30°F/45°F	20.0	1	7.5	467	Hydrocarbon R-290
IDC-VBR9IPR	37	31-3/4	51-3/16	2	30°F/45°F	10.0	1	7.2	397	Hydrocarbon R-290
IDC-VBR12IPR	49-1/5	31-3/4	51-3/16	2	30°F/45°F	13.0	1	7.3	428	Hydrocarbon R-290
IDC-VBR18IPR	73-5/6	31-3/4	51-3/16	3	30°F/45°F	20.0	1/2	12.7	467	Hydrocarbon R-290

Pastry display cases

VON Series

IDC-VON12PR
 VON Models:
 INOX Exterior-Interior



MOD.	Overall Dimensions			Doors	(°F)	(ft³)	(HP)	115V	[Lbs]	DOE
IDC-VON9PR	36-15/16	31-7/8	51-3/16	2	30°F/45°F	9-1/4	1	7.8	430	Hydrocarbon R-290
IDC-VON12PR	50-1/2	31-7/8	51-1/8	2	30°F/45°F	12-1/3	1	7.3	481	Hydrocarbon R-290
IDC-VON18PR	73-5/6	31-7/8	51-3/16	3	30°F/45°F	18-1/2	1/2	12.7	545	Hydrocarbon R-290

STANDARD FEATURES

ELECTRICAL	115V / 1ph / 60 Hz									
OPTIONS	VBR Models Exterior Colors									
	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	Design 3504035 Pink		
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gray	Ral 7037 Dusty grey	Design 2108025 Sky Blue		
	Ral 7042 Traffic gray	White	Black	Stainless Steel	Consult for other colours					

10 PASTRY AND GELATO DISPLAY CASES


VCO Series

Pastry display cases

COMBO Series



Black Standard



MOD.	Overall Dimensions			(°F)	(ft ³)	(HP)	115V [Amps]	[Lbs]	DOE
IDC-VC09	37	34-15/16	57-1/8	30°F/45°F	10	1/3	11.92	507	Hydrocarbon R-290
IDC-VC012	49-3/16	34-15/16	57-1/8	30°F/45°F	13-1/2	3/4	12.04	578	Hydrocarbon R-290
IDC-VC015	61-1/2	34-15/16	57-1/8	30°F/45°F	16-4/5	1/2	13.67	672	Hydrocarbon R-290
IDC-VC018	73-13/16	34-15/16	57-1/8	30°F/45°F	20-1/5	3/4	16.23	772	Hydrocarbon R-290

STANDARD FEATURES

ELECTRICAL	115V / 1ph / 60 Hz
------------	--------------------



Combo Series



Ambar Series

10 PASTRY AND GELATO DISPLAY CASES

Gelato Series


Ice Cream & Gelato display cases

VAR / VCB Series


IDC-VAR24H




VAR12H

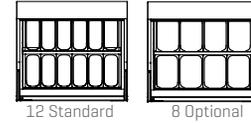

VAR18H




18 Standard




12 Optional

VAR24H



24 Standard



16 Optional



Important:

Remove gelato product every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.




Removable evaporation tray-Easy cleaning


IDC-VCB18UH




VCB12H

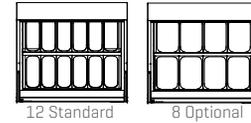

VCB18H




18 Standard




12 Optional

VCB24H



24 Standard



16 Optional



MOD.

Overall Dimensions

Doors

Pans

(°F)

(ft³)

(HP)

115V

(Lbs)

DOE

MOD.	Overall Dimensions	Doors	Pans	(°F)	(ft³)	(HP)	115V	(Lbs)	DOE		
NEW IDC-VAR12H	46	41-1/4	47-1/2	2	12	5°F / -0.40°F	6.42	1-1/4	10.14	418	Hydrocarbon R-290
NEW IDC-VAR18H	66-1/8	41-1/4	47-1/2	2	18	5°F / -0.40°F	8.05	1+1/2	14.31	723	Hydrocarbon R-290
NEW IDC-VAR24H	86-1/4	41-1/4	47-1/2	2	24	5°F / -0.40°F	9.67	1-1/4 + 3/4	14.35	617	Hydrocarbon R-290
NEW IDC-VCB12H	46	41-1/4	47-1/2	2	12	5°F / -0.40°F	6.42	1-1/4	10.14	419	Hydrocarbon R-290
NEW IDC-VCB18H	66-1/8	41-1/4	47-1/2	2	18	5°F / -0.40°F	8.05	1+1/2	14.31	573	Hydrocarbon R-290
NEW IDC-VCB24H	86-1/4	41-1/4	47-1/2	2	24	5°F / -0.40°F	9.67	1-1/4 + 3/4	14.35	617	Hydrocarbon R-290

STANDARD FEATURES

Exterior Colors

Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	Design 3504035 Pink
Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gray	Ral 7037 Dusty grey	Design 2108025 Sky Blue
Ral 7042 Traffic gray	White	Black	Stainless Steel	DESIGN 1107060 Pistachio	Consult for other colours		

Ice Cream Ser


Infrico Food Service Equipment '26

VBZ Series


IDC-VBZ12SU



VBZ12SU




VBZ15SU

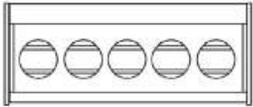


Important:
Remove ice cream product every night and store them inside a regular freezer, to allow proper defrost cycle and cleaning on the equipment.

VBZ12U



VBZ15U



IDC-VBZ12U



	Overall Dimensions			Doors	Pans	(°F)	(ft ³)	(HP)	115V	(Lbs)	DOE
IDC-VBZ12SU	49-1/5	45-1/16	47-11/32	2	20	5°F / -0.40°F	8-5/9	1/2	6.84	278	Hydrocarbon R-290
IDC-VBZ15SU	61-1/2	43-7/8	47-11/32	2	14	5°F / -0.40°F	12-5/6	1/2	6.41	399	Hydrocarbon R-290
IDC-VBZ12U	49-1/5	43-7/8	52	2	16	5°F / -0.40°F	7-2/5	1/2	8.75	298	Hydrocarbon R-290
IDC-VBZ15U	61-1/2	43-7/8	52	2	20	5°F / -0.40°F	9-1/4	1/2	9.61	419	Hydrocarbon R-290
STANDARD FEATURES	Exterior Colors										
OPTIONS	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	Design 3504035 Pink			
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gray	Ral 7037 Dusty grey	Design 2108025 Sky Blue			
	Ral 7042 Traffic gray	White	Black	Stainless Steel	DESIGN 1107060 Pistachio	Consult for other colours					

10 PASTRY AND GELATO DISPLAY CASES

VC Series

Vision Series VC Series

IDC-VC2010B



IDC-VC1400



IDC-VC2010
Back Doors

MOD.	Overall Dimensions			°F	ft ³	[HP]	115V [Amps]	[Lbs]	DOE
IDC-VC1400	54-1/2	29-3/8	41-5/8	35°F/41°F	16.6	1/3	9.61	343	Hydrocarbon R-290
IDC-VC2010	79-1/8	29-3/8	41-5/8	35°F/41°F	25.05	1/3	9.66	467	Hydrocarbon R-290
IDC-VC1400B	54-1/2	29-3/8	41-5/8	35°F/41°F	16.6	1/3	9.61	343	Hydrocarbon R-290
IDC-VC2010B	79-1/8	29-3/8	41-5/8	35°F/41°F	25.05	1/3	9.66	467	Hydrocarbon R-290

STANDARD FEATURES

ELECTRICAL	115V / 1ph / 60 Hz Set of 4" casters, Set of 4" casters, front locking.	Back Glass Door Operating digital control bluetooth or wifi Additional shelves
-------------------	---	--



11. Supermarket & Grocery Stores






11. Supermarket & Grocery Stores

Air curtains Supermarket

	Models	Description
132	IAG-SML09PCM1	Air curtains semi vertical
	IAG-SML12PCM1	Air curtains semi vertical
	IAG-SML12DCPCM1	Glass door semi vertical
	IAG-SML18DCPCM1	Glass door semi vertical

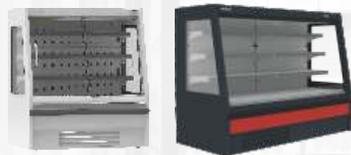

Medium temp Multideck

	Models	Description
133	IAG-ML09DCPCM1	Reach-in Merchandisers
	IAG-ML12DCPCM1	Reach-in Merchandisers
	IAG-ML18DCPCM1	Reach-in Merchandisers
	IAG-ML09PCM1	Grab and Go Merchandisers
	IAG-ML12PCM1	Grab and Go Merchandisers
	IAG-ML18PCM1	Grab and Go Merchandisers



Medium temp Stainless steel multideck

	Models	Description
134	IAG-ML09DCPIM1	Reach-in Merchandisers
	IAG-ML12DCPIM1	Reach-in Merchandisers
	IAG-ML18DCPIM1	Reach-in Merchandisers
	IAG-ML09PIM1	Grab and Go Merchandisers
	IAG-ML12PIM1	Grab and Go Merchandisers
	IAG-ML18PIM1	Grab and Go Merchandisers



Semi Plug-In Multideck

136

Models	Description
IAG-ML12DGUM1	Glass door reach in refrigerator 81" height
IAG-ML18DGUM1	Glass door reach in refrigerator 81" height
IAG-ML25DGUM1	Glass door reach in refrigerator 81" height
IAG-ML37DGUM1	Glass door reach in refrigerator 81" height
IAG-ML12DGU22M1	Glass door reach in refrigerator 87" height
IAG-ML18DGU22M1	Glass door reach in refrigerator 87" height
IAG-ML25DGU22M1	Glass door reach in refrigerator 87" height
IAG-ML37DGU22M1	Glass door reach in refrigerator 87" height
IAG-MN2PBTUL1	2 Glass door reach in freezer
IAG-MN3PBTUL1	3 Glass door reach in freezer



Deli - Display cases Straight glass

138

Models	Description
IDC-VBC09 RIUCP / SCP	Deli display cases
IDC-VBC12 RIUCP / SCP	Deli display cases
IDC-VBC15 RIUCP / SCP	Deli display cases
IDC-VBC18 RIUCP / SCP	Deli display cases
IDC-VBC25 RIUCP / SCP	Deli display cases
IDC-VBC90ARIUCP	Deli display cases
IDC-VBC90CRIUCP	Deli display cases



Fish - Display cases

139

Models	Description
IDC-VRP13	Fish display cases
IDC-VML 12	Fish display cases
IDC-VML 15	Fish display cases
IDC-VML 18	Fish display cases



Specifications



IAG-SML09PCM1

SML Open

Exterior

- Black prepainted steel cabinet standard.
- Glass side panels.
- Heavy duty ball transfer and levelling feet.

Interior

- Pull down night curtain.
- LED lighting in canopy and under each shelf.
- Black prepainted steel cabinet standard.

Shelving

- Three rows of adjustable shelves.
- Price channels included.

Refrigeration

- Digital temperature controller with automatic defrost system.
 - Stainless steel evaporative pan system.
 - Forced air refrigeration system.
 - R290 refrigerant.
 - Case engineered to operate at 75°F and 55% relative humidity
- Electrical.
- 115v /1PH/60HZ/ 5-15/5-20P Plug.



IAG-ML09PIM1

SML Glass Doors

Exterior

- Black prepainted steel cabinet standard
- Glass side panels
- Heavy duty ball transfer and levelling feet

Interior

- Sliding glass doors
- LED lighting in canopy and under each shelf
- Black prepainted steel cabinet standard.

Shelving

- Three rows of adjustable shelves
- Price channels included



IAG-ML12PIM1



CM1



IAG-ML18DCPCM1

Air curtains painted steel

Exterior

- Pull down night curtain.
- Black prepainted steel cabinet standard.
- Glass side panels.
- Heavy duty ball transfer and levelling feet.
- AISI 304 stainless steel (inox) *only Air curtains semi vertical glass sided.*

Interior

- LED lighting in canopy and under each shelf.
- Black prepainted steel cabinet standard.
- AISI 304 stainless steel (inox) *only Air curtains semi vertical glass sided.*

Shelving

- Four rows of adjustable shelves.
- Price channels included.

Refrigeration

- Digital temperature controller with automatic defrost system.
- Double stainless steel evaporative pan system, first, by hot gas, second, by electrical resistance. - Extractable condensing unit for easy service.
- Forced air refrigeration system.
- R290 refrigerant.
- Case engineered to operate at 75°F and 55% relative humidity.

Electrical

- 220V /1PH/60HZ/L14-30P Plug (Open merchandiser).
- 115v /1PH/60HZ/ 5-15/5-20P Plug (Glass door merchandiser).

Air curtains stainless steel

Exterior

- AISI 304 stainless steel.
- Pull down night curtain.
- Glass side panels.
- Heavy duty ball transfer and levelling feet.

Interior

- AISI304 stainless steel.
- Stainless steel internal panel perforated.
- LED lighting in canopy and under each shelf.

Shelving

- Four rows of adjustable shelves.
- Price channels included.

Refrigeration

- Digital temperature controller with automatic defrost system.
- Double stainless steel evaporative pan system, first, by hot gas, second, by electrical resistance. - Extractable condensing unit for easy service.
- Forced air refrigeration system.
- R290 Refrigerant.
- Case engineered to operate at 75°F and 55% relative humidity.



Electrical

- 220V /1PH/60HZ/L14-30P Plug (Open merchandiser).
- 115v /1PH/60HZ/ 5-15/5-20P Plug (Glass door merchandiser).

SML Series

Low profile air curtains

SML Series

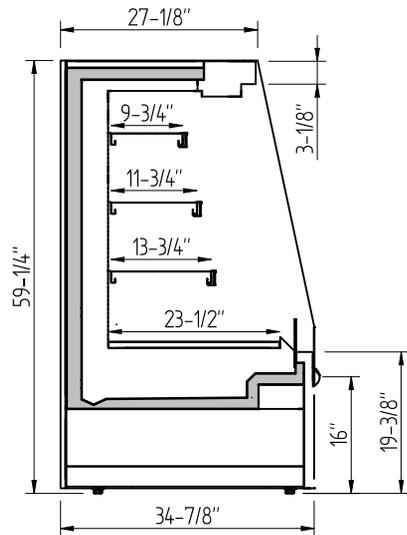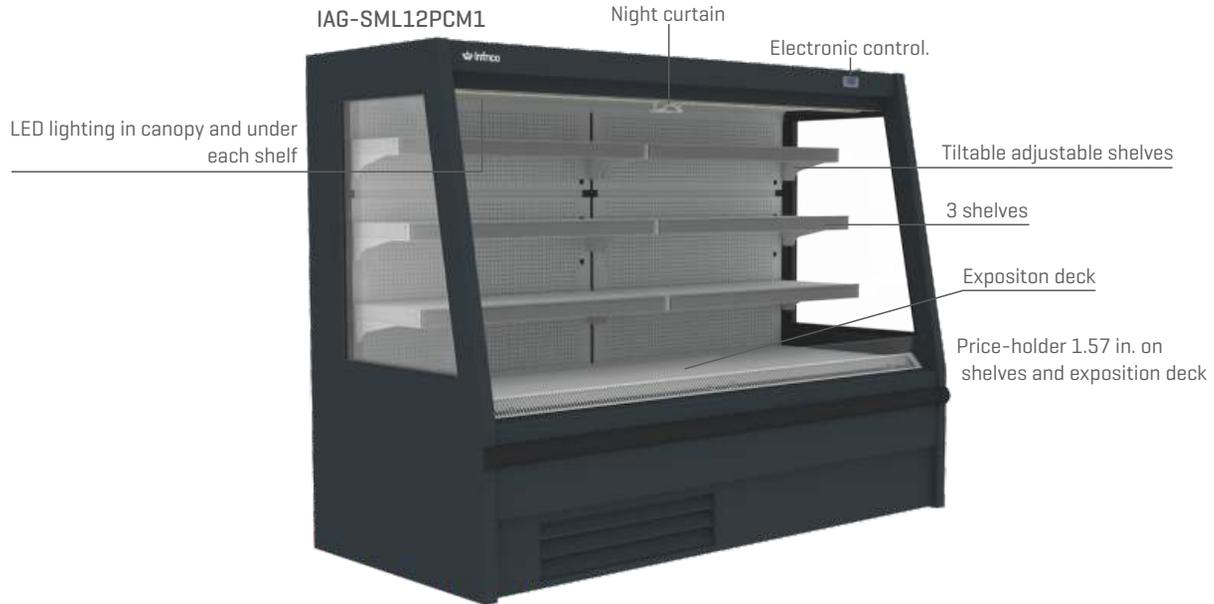

MOD.		Overall Dimensions		(°F)	(ft ³)	(ft ²)	Doors	Shelves	DOE
IAG-SML09PCM1	37	34-7/8	59-1/4	30°F/41°F	16-1/4	9-1/3		3	Hydrocarbon R-290
IAG-SML12PCM1	49-1/5	34-7/8	59-1/4	30°F/41°F	21-5/8	12-1/2		3	Hydrocarbon R-290
IAG-SML12DCPCM1	49-1/5	34-7/8	59-1/4	30°F/41°F	21-5/8	12-1/2	2	3	Hydrocarbon R-290
IAG-SML18DCPCM1	77	34-7/8	59-1/4	30°F/41°F	25-5/8	18-5/6	3	3	Hydrocarbon R-290

COLORS	Exterior Colors							Interior Colors	
	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	White	
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gary	Ral 7037 Dusty grey	Black	
Ral 7042 Traffic gray	White	Black	Stainless Steel	Consult for other colours			Stainless Steel		

Medium temp multideck, reach in/grab & go merchandiser

MDCP/MP Series



Electronic control

LED lighting in canopy and under each shelf

Price-holder 1.57 in. on shelves and exposition deck

4 shelves

Tilttable adjustable shelves

Expositon deck



New front bumper

LED lighting in canopy and under each shelf

IAG-ML12PCM1



Tilttable adjustable shelves

4 shelves

Price-holder 1.57 in. on shelves and exposition deck

Expositon deck



MOD.	Overall Dimensions			[°F]	[ft ³]	Doors	Shelves	[HP]	115V	230V	[Lbs]	DOE
IAG-ML09DCPCM1	37	34-5/6	78-3/4	30°F/41°F	32	2	4	1/2	13.43	-	485	Hydrocarbon R-290
IAG-ML12DCPCM1	49	34-5/6	78-3/4	30°F/41°F	43	2	4	3/4	11.3	-	697	Hydrocarbon R-290
IAG-ML18DCPCM1	73	34-5/6	78-3/4	30°F/41°F	73	3	4	3/4	17.4	-	908	Hydrocarbon R-290
IAG-ML09PCM1	37	34-5/6	78-3/4	30°F/41°F	32		4	1/2	-	9.2	476	Hydrocarbon R-290
IAG-ML12PCM1	49	34-5/6	78-3/4	30°F/41°F	43		4	3/4	-	10.45	568	Hydrocarbon R-290
IAG-ML18PCM1	73	34-5/6	78-3/4	30°F/41°F	73		4	3/4	-	16.96	870	Hydrocarbon R-290

COLORS	Exterior Colors							Interior Colors	
	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	White	
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gary	Ral 7037 Dusty grey	Black	
	Ral 7042 Traffic gray	White	Black	Stainless Steel	Consult for other colours			Stainless Steel	

Medium temp multideck, reach in/grab & go merchandiser Stainless Steel

MDCPI/MPI Series



MOD.	Overall Dimensions			(°F)	(ft ³)	Doors	Shelves	[HP]	115V	230V	[Lbs]	DOE
IAG-ML09DCPIM1	37	34-5/6	78-3/4	33°F/41°F	32	2	4	1/2	13.43	-	485	Hydrocarbon R-290
IAG-ML12DCPIM1	49	34-5/6	78-3/4	33°F/41°F	43	2	4	3/4	11.3	-	697	Hydrocarbon R-290
IAG-ML18DCPIM1	73	34-5/6	78-3/4	33°F/41°F	73	3	4	3/4	17.4	-	908	Hydrocarbon R-290
IAG-ML09PIM1	37	34-5/6	78-3/4	33°F/41°F	32		4	1/2	-	9.2	397	Hydrocarbon R-290
IAG-ML12PIM1	49	34-5/6	78-3/4	33°F/41°F	43		4	3/4	-	1	591	Hydrocarbon R-290
IAG-ML18PIM1	73	34-5/6	78-3/4	33°F/41°F	73		4	3/4	-	3	710	Hydrocarbon R-290



MBT Series

Semi plugin multideck

MDGU Series



IAG-ML25DGU22M1



80-1/32

MOD.	Length without end panels	Overall Dimensions	(°F)	(ft ³)	Doors	Shelves	(HP)	220V	(Lbs)	DOE
IAG-ML12DGUM1	49-1/5	34-1/2 80-1/32	30°F/41°F	48-1/2	2	4	1	5.08	568	Hydrocarbon R-290
IAG-ML18DGUM1	73-5/6	34-1/2 80-1/32	30°F/41°F	72-5/7	3	4	1-1/4	6.36	870	Hydrocarbon R-290
IAG-ML25DGUM1	98-3/7	34-1/2 80-1/32	30°F/41°F	97	4	4	1-1/2	8.41	963	Hydrocarbon R-290
IAG-ML37DGUM1	147-2/3	34-1/2 80-1/32	30°F/41°F	145-3/7	6	4	1-1/2	15.82	1,481	Hydrocarbon R-290

IAG-ML12DGU22M1	49-1/5	34-1/2 85-13/16	30°F/41°F	53	2	5	1	5.08	568	Hydrocarbon R-290
IAG-ML18DGU22M1	73-5/6	34-1/2 85-13/16	30°F/41°F	79-1/2	3	5	1-1/4	6.36	870	Hydrocarbon R-290
IAG-ML25DGU22M1	98-3/7	34-1/2 85-13/16	30°F/41°F	106	4	5	1-1/2	8.41	963	Hydrocarbon R-290
IAG-ML37DGU22M1	147-2/3	34-1/2 85-13/16	30°F/41°F	159	6	5	1-1/2	15.82	1,481	Hydrocarbon R-290

COLORS	Exterior Colors								Interior Colors	
	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	White	Black	
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gary	Ral 7037 Dusty grey	Black		
	Ral 7042 Traffic gray	White	Black	Stainless Steel	Consult for other colours			Stainless Steel		

MDG Series


Infrico Food Service Equipment '26

Semi plugin multideck

MBTU Series



IAG-ML37DGUM1

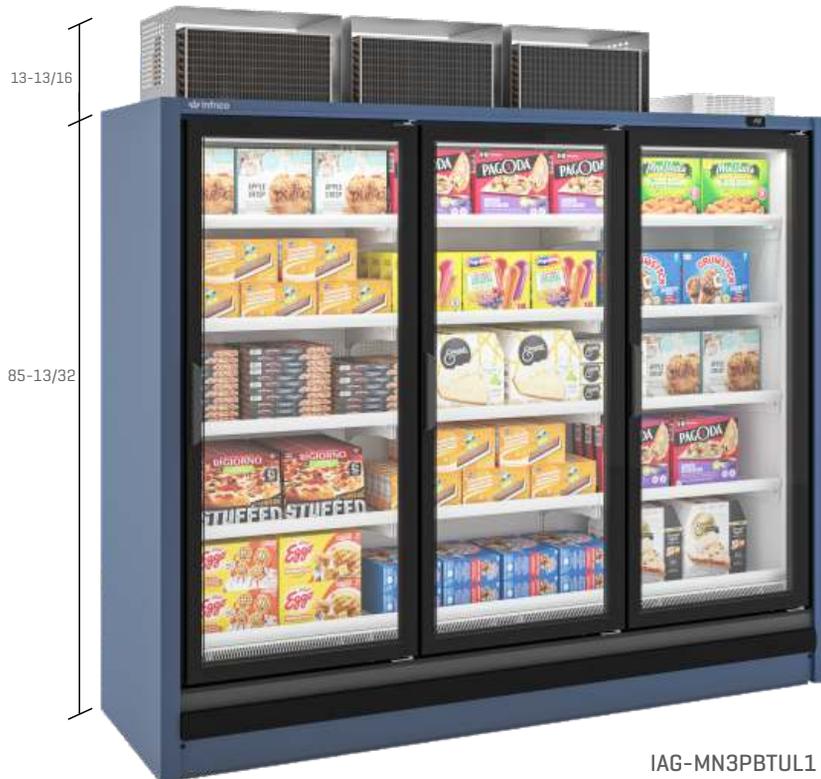

IAG-MN3PBTUL1

MOD.	Length without end panels	Overall Dimensions	(°F)	(ft³)	Doors	Shelves	[HP]	230V [Amps]	[Lbs]	DOE
IAG-MN2PBTUL1	61-1/2	30-11/32 80-13/32	0°F/5°F	22-8/9	2	4	1+1+1	7.40	870	Hydrocarbon R-290
IAG-MN3PBTUL1	92-1/4	30-11/32 80-13/32	0°F/5°F	34-1/3	3	4	1+1+1	10.98	963	Hydrocarbon R-290


COLORS	Exterior Colors							Interior Colors	
	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	White	
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gary	Ral 7037 Dusty grey	Black	
Ral 7042 Traffic gray	White	Black	Stainless Steel	Consult for other colours			Stainless Steel		

VBC Series

Deli display cases
Straight glass

VBC Barcelona Series

IDC-VBC15RIUCP

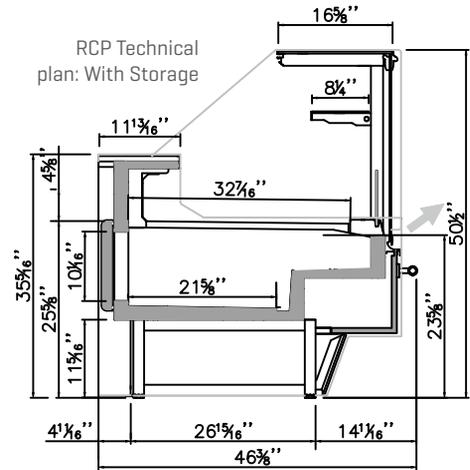

RCP: Without Storage
SCP: With Storage



IDC-VBC18SIUCP + IDC-VBC90ARIUCP
[Standard color]



MOD.	Overall Dimensions			[°F]	[ft ³]	[HP]	115V	[Lbs]	DOE
IDC-VBC09 RIUCP / SIUCP	37	46-3/8	50-1/2	30°F/45°F	9-3/4	1/3	8.97	419	Hydrocarbon R-290
IDC-VBC12 RIUCP / SIUCP	49-3/16	46-3/8	50-1/2	30°F/45°F	13	3/4	12.16	441	Hydrocarbon R-290
IDC-VBC15 RIUCP / SIUCP	61-1/2	46-3/8	50-1/2	30°F/45°F	16	1/2	12.99	529	Hydrocarbon R-290
IDC-VBC18 RIUCP / SIUCP	73-3/4	46-3/8	50-1/2	30°F/45°F	19	3/4	13.22	606	Hydrocarbon R-290
IDC-VBC25 RIUCP / SIUCP	98-3/7	46-3/8	50-1/2	30°F/45°F	26	1-1/4	18.99	661	Hydrocarbon R-290
IDC-VBC90 ARIUCP	75-5/8	68-5/16	50-1/2	30°F/45°F	6-8/9	5/8	11.90	681	Hydrocarbon R-290
IDC-VBC90 CRIUCP	75-5/8	68-5/16	50-1/2	30°F/45°F	7-4/7	5/8	10.99	747	Hydrocarbon R-290

Include sliding doors


STANDARD FEATURES

ELECTRICAL	115V / 1ph / 60 Hz									
OPTIONS	Exterior Colors								Interior Colors	
	Ral 1015 Beige	Ral 1018 Yellow	Ral 2003 Orange	Ral 3003 Maroon	Ral 3020 Red	Ral 5015 Blue	Ral 5017 Dark blue	White		
	Ral 5011 Steel blue	Ral 6002 Dark Green	Ral 6018 Green	Ral 6019 Pastel Green	Ral 7016 Anthracita	Ral 7035 Light gary	Ral 7037 Dusty grey	Black		
	Ral 7042 Traffic gray	White	Black	Stainless Steel	Consult for other colours			Stainless Steel		


Fish display cases

VRP / VML Málaga Series

IDC-VRP 13

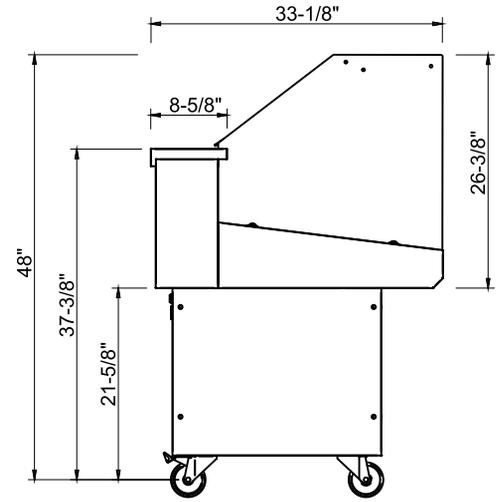

VRP

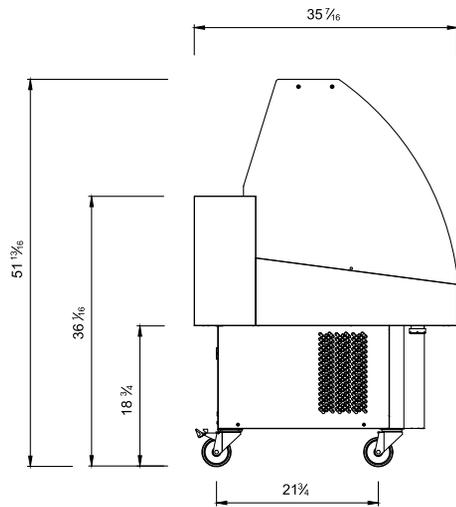

VML

IDC-VML15



MOD.	Overall Dimensions			°F	(ft ³)	(HP)	115V (Amps)	[Lbs]	DOE
IDC-VRP 13	51-31/32	33-15/32	48	30°F/45°F	4.06	1/3	4.9	342	Hydrocarbon R-290
IDC-VML 12	49-1/5	35-7/16	52-1/2	30°F/45°F	8-7/9	1/4	8.37	342	Hydrocarbon R-290
IDC-VML 15	61-1/2	35-7/16	51-13/16	30°F/45°F	11	1/2	8.48	401	Hydrocarbon R-290
IDC-VML 18	73-5/6	35-7/16	52-1/2	30°F/45°F	13-1/6	3/4	10.92	430	Hydrocarbon R-290

ELECTRICAL	Cord and NEMA 5- 15 plug	115V / 1 ph / 60 Hz.
-------------------	--------------------------	----------------------

Display the fish on crushed ice

12. Accessories & parts

For a full list and pricing of O.E.M Parts & Accessories, please go to AutoQuotes 



Customer Service



FOR ORIGINAL FACTORY PARTS &
AUTHORIZED SERVICE: 1-855-340-
4637

Our technical and customer service team is focused on providing you with the care, knowledge and support you will need with the repair and delivery of spare parts.



www.infrico.us



Infrico USA

Limited warranty

2026 INFRICO USA LIMITED WARRANTY INFRICO USA

[further on stated as "INFRICO"] warrants to the original purchaser of every new INFRICO refrigerated unit, the cabinet and all parts thereof, to be free from defects in material or workmanship, under normal and proper use and maintenance service as specific by INFRICO and upon proper installation and start-up in accordance with the instruction packet supplied with each INFRICO unit. INFRICO's obligation under this warranty is limited to the following conditions upon each date of invoice:

- PartsFive (5) years
- LaborFive (5) years
- CompressorSeven (7) years

All parts covered under this specific above stated warranty that are determined as failures by INFRICO, are limited to the repair or replacement, including labor charges of defective parts or assemblies.

WARRANTY CLAIM PROCEDURE

All claims for labor or parts must be made directly through INFRICO. All claims should include model number of the unit, the serial number of the cabinet, proof of purchase, and all pertinent information supporting the existence of the alleged defect. Warranty starts the day of shipment.

Based on the reported case, INFRICO will program the service attention either by sending an authorized technician to the place indicated by the Customer in order to solve the situation or will send the necessary spare parts for its repair.

This contract does not apply outside the limits of the USA and CANADA. Nor does it apply to any part which has been subject to misuse, neglect, alteration, accident or to any damage caused by transportation, flood, fire, or the acts of God. This contract is not effective unless the INFRICO Warranty Claim Card, furnished to the distributor, is properly filled out and mailed to service@infrico.com within 24 HOURS from the date of delivery. The term "Original Purchaser" as used herein shall be deemed to refer to that person, firm, association, or company for whom the refrigeration unit refers to herein is originally installed.

WHAT IS NOT COVERED BY THIS WARRANTY

INFRICO's sole obligation under this warranty is limited to either repair or replacement of parts, subject to the additional limitations below.

This warranty neither assumes nor authorizes any person to assume obligations other than those expressly covered by this warranty.

No consequential damages:

INFRICO is not responsible for economic loss; profit loss or special indirect or consequential damages, including without limitation, losses or damages arising from food or product spoilage claims whether or not on account of refrigeration failure.

Warranty is not transferable:

This warranty is not assignable and applies only in favor of the original purchaser/user to whom delivered. Any such assignment or transfer shall void the warranties herein made and shall void all warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose.

Improper use:

INFRICO assumes no liability for parts or labor coverage for component failure or other damages resulting from improper usage or installation or failure to clean and/or maintain product as set forth in the warranty packet provided with the unit.

ALTERATION, NEGLIGENCE, ABUSE, MISUSE, ACCIDENT, DAMAGE DURING TRANSIT OR INSTALLATION, FIRE, FLOOD, ACTS OF GOD:

INFRICO is not responsible for the repair or replacement of any parts that INFRICO determines have been subjected after the date of manufacture to alteration, neglect, abuse, misuse, accident, damage during transit or installation, fire, flood, act of God or improper electrical connections. INFRICO is not responsible for the repair or replacement of failed or damaged components resulting from electrical power failure, the use of extension cords, low voltage, or voltage drops to the unit.

No implied warranty of merchantability or fitness for a particular purpose:

There aren't any other warranties expressed, implied or statutory, except the warranties as described above. These warranties are exclusive and in lieu of all other warranties, including implied warranty and merchantability or fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof.

Outside USA & CANADA:

This warranty does not apply to, and INFRICO is not responsible for, any warranty claims made on products sold or used outside the United States of America and Canada.



@   InfricoUSA

infrico.us

Sales Department

sales@infrico.com
305-777-9599 x700

Marketing Department

marketingusa@infrico.com
305-777-9599 x702

National Service Department

service@infrico.com
305-777-9599 x701

Customer Service Support

customerservice@infrico.com
305-777-9599 x702

Logistics Department

logistics@infrico.com
305-777-9599 x704

Parts Department

parts@infrico.com
305-777-9599 x701

GRUPO Infrico®



We collaborate:



We participate in:



Corporate Social Responsibility [CSR]:





in InfricoUSA  InfricoUSA

**NORTH AMERICA
CORPORATE DIVISION**

14200 NW 25 Street.
Sweetwater, FL 33172 - USA

Sales Department

sales@infrico.com
305-777-9599 x700

Marketing Department

marketingusa@infrico.com
305-777-9599 x702

National Service Department

service@infrico.com
305-777-9599 x701

Parts & Logistics Department

logistics@infrico.com
305-777-9599 x704

Customer Service Support

customerservice@infrico.com
305-777-9599 x702