



# HOSHIZAKI

## PRODUCT GUIDE

ICE MACHINES | REACH-INS

# HOSHIZAKI BEYOND STRONG.

OUR PRODUCTS. OUR PEOPLE.  
OUR COMMITMENT TO YOU.



HOSHIZAKI is the world leader in the design and manufacture of ice and refrigeration products for the food service industry. With corporate headquarters in Peachtree City, Georgia, **HOSHIZAKI AMERICA, INC.'S** continuous innovation and commitment to the highest standards ensures that our customers have exceptional quality products.



## CORPORATE MISSION

HOSHIZAKI AMERICA'S mission is to ensure optimal customer satisfaction by consistently delivering high-quality products and services throughout the Americas. The company aims to maintain a healthy organization and uphold its reputation as an innovative leader in the commercial kitchen equipment industry.



HOSHIZAKI AMERICA is proud to have been certified by the Georgia Department of Economic Development as **Georgia Made** for products manufactured in our production facilities in Peachtree City and Griffin Georgia.



## CONTRIBUTING TO A SUSTAINABLE FUTURE

HOSHIZAKI AMERICA IS COMMITTED TO SOCIAL, ENVIRONMENTAL AND ECONOMIC SUSTAINABILITY.

We operate our facilities responsibly, as shown by our ISO 14001 certification. We recycle 90% of Stainless Steel, 87% of Galvanized Steel, 90% of Copper, 25% of Aluminum, and 90% of other scrap metal. Our ISO-9001 certification reflects our commitment to quality and regulatory standards.

We consistently use natural refrigerants and comply with US regulations, including lead content verification and energy standards, as well as Canadian NRCAN. Our logistics partners participate in the SmartWay Partnership Program to reduce air pollution.


Our sustainability efforts are recognized by our 125+ Energy Star qualified units, multiple Energy Star Partner of the Year awards, and our products' classification as USGC LEED® credit qualifying.



NATURAL  
REFRIGERANT



HOSHIZAKI products can contribute to satisfying EA<sub>c</sub>1, MR<sub>c</sub>2, MR<sub>c</sub>4, WE<sub>c</sub>3, ID<sub>c</sub>1, PC<sub>18</sub> credits under LEED®

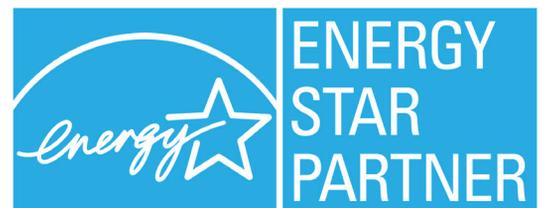

# ICE MACHINES

TYPES OF ICE	8
<b>CUBER SERIES</b>	10
Undercounter Cubers with Built-In Bins	12
KMEdge™ Crescent® Cubers	14
KMEdge™ Crescent® Cubers for Dispensers	18
KMEdge™ Crescent® Cubers - Serenity Series	19
IM Square Cubers Specialty Ice	26
<b>CUBELET SERIES/FLAKERS</b>	20
Undercounter Cubelet with Built-In Bins	22
Cubelet Ice Machines	23
Cubelet Beverage Dispensers	24
Cubelets - Serenity Series	25
Flakers	28
<b>DISPENSER SERIES</b>	30
DCM Ice & Water Dispensers	32
DM/DWM Dispensers	34
DB Hotel/Motel Dispensers	35
<b>DISPENSER STANDS</b>	36
<b>TOP KIT MATRIX</b>	37
<b>ICE STORAGE BINS</b>	38
<b>REMOTE CONDENSERS &amp; MATRIX</b>	40
<b>WATER FILTRATION</b>	42
<b>REMOTE MONITORING</b>	43
<b>ICE ACCESSORIES</b>	106
<b>ICE MACHINE MODEL CODE &amp; USAGE GUIDE</b>	112



Scan to see our Digital Catalog



Scan to see our current Price list

# REACH-INS

REACH-INS	44
<b>STEELHEART® SERIES</b>	44
Upright Refrigerators & Freezers	46
Dual Temps	49
Pass-Thrus	50
Roll-Ins/Roll-Thrus	51
Heated Cabinets	52
Undercounter Refrigerators & Freezers	56
Undercounter Refrigerators Drawer / Door Combination	58
Undercounter Refrigerators with Drawers	59
Undercounter Freezers	60
Undercounter Sidemount Refrigerators	62
Undercounter Sidemount Refrigerators Drawer/Door Combination	64
Undercounter Sidemount Refrigerators with Drawers	65
Undercounter Sidemount Refrigerators Low-Profile	66
Worktop Refrigerators	70
Worktop Freezers	74
Worktop Sidemount Refrigerators & Freezers	76
Prep Tables Sandwich Top Refrigerators	78
Prep Tables - Mega Top Refrigerators	82
Prep Tables - Flat Lid Refrigerators	86
Prep Tables - Pizza Refrigerators	88
Chef Base Refrigerators	92
<b>VALIANCE™</b>	94
<b>GLASS DOOR MERCHANDISERS</b>	98
<b>COMPACT UNDERCOUNTER REFRIGERATOR</b>	100
<b>SUSHI CASES</b>	101
<b>BACK BAR REFRIGERATION</b>	102
<b>REFRIGERATION ACCESSORIES</b>	110

# Ice

**Hoshizaki Ice Machines** maximize efficiency without compromising the quality. We offer clear, hard, and clean ice from machines guaranteed to last for years. Choose between **8 different types** of ice from air-cooled, water-cooled and remote air-cooled models. Versatile for any operation, our ice machines are perfect for restaurants and bars, convenience stores, hospitality industries, supermarkets, schools and universities, healthcare centers and more.



Click on logos for more information.



# 8 Types of Ice

with a variety of production & storage options

## Crescent®

KMEdge™, hard, clear crescent® shape



## Cubelet

Chewable, small pellet shape



## Soft Cubelet

SOFT - Chewable, small pellet shape



## Flaked

Soft, light, chewable moldable ice



 Restaurants

 University/School

 Hotels

 Business

 Bars & Cocktail Lounges

 Healthcare

 C-Store

 Grocery

# Specialty Ice

## Top Hat

Individual, hard, clear round shape



## Sphere

Individual 1.8" in diameter, clear and solid



## 1by1 Cube

Individual, hard, clear square shape



## 2by2 Cube

Individual, hard, clear square shape



Specialty Ice - See page 26



# CRESCENT® CUBERS

CLEAN, CLEAR, CRESCENT® CUBES

Clean, clear, individual crescent shaped cubes. Longer-lasting equipment and the most efficient, money-saving ice maker ever.

## Energy Efficient

- Our CycleSaver design produces the same amount of ice in half the number of cycles
- Resulting in a longer total product life

## Dual-sided Evaporator

- Makes ice on both sides of the evaporator
- Reduces energy costs by creating the most efficient heat exchange

## Sanitary Components

- Removable air filters allow for easy and affordable maintenance
- Sealed compartments protect the evaporator, reducing bacteria growth and cleaning frequency

**KM||EDGE™**

# CRESCENT® CUBERS



## Undercounter KM Crescent® Cubers - with Built-In Bins



### KM-81BAJ★

17 3/4"W X 24"D X 39"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
Filter	115V/60/1	52	86	8.5	125 Lbs.	<b>\$5,360</b>

Self-Contained Bin Storage Capacity Up to 38 Lbs.

### KM-116BAJ★

23 3/4"W X 24"D X 39"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
Filter	115V/60/1	100	125	8.1	146 Lbs.	<b>\$6,050</b>

Self-Contained Bin Storage Capacity Up to 53 Lbs.



### KM-161B\_J

23 3/4"W X 28"D X 39"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
KM-161BAJ	115V/60/1	123	163	8.6	161 Lbs.	<b>\$6,640</b>
KM-161BWJ	115V/60/1	135	157	6.5	161 Lbs.	<b>\$7,000</b>

Filter

Self-Contained Bin Storage Capacity Up to 78 Lbs.

### KM-231BAJ

24"W X 28"D X 39"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
Filter	115V/60/1	147	213	8.4	165 Lbs.	<b>\$7,190</b>

Self-Contained Bin Storage Capacity Up to 80 Lbs.



### KM-301B\_J

30"W X 28"D X 39"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
KM-301BAJ	115V/60/1	212	290	7.1	206 Lbs.	<b>\$8,400</b>
KM-301BWJ	115V/60/1	237	265	4.9	189 Lbs.	<b>\$8,470</b>

Filter

Self-Contained Bin Storage Capacity Up to 100 Lbs.



[CLICK HERE - ACCESSORIES](#)





## KM-350M\_J

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-350MAJ*</b>	115V/60/1	393	489	5.4	175 Lbs.	<b>\$8,520</b>
<b>KM-350MWJ</b>	115V/60/1	383	414	4.9	175 Lbs.	<b>\$8,660</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

## KM-520M\_J(Z)

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-520MAJ*</b>	115V/60/1	480	556	4.7	175 Lbs.	<b>\$9,070</b>
<b>KM-520MWJ</b>	115V/60/1	444	474	4.7	175 Lbs.	<b>\$9,210</b>
<b>KM-520MRJZ*</b>	115V/60/1	495	547	4.8	175 Lbs.	<b>\$8,890</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

## KM-660M\_J(Z)

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-660MAJ</b>	115V/60/1	560	650	5.3	180 Lbs.	<b>\$10,300</b>
<b>KM-660MWJ</b>	115V/60/1	668	669	4.3	180 Lbs.	<b>\$10,630</b>
<b>KM-660MRJZ*</b>	115V/60/1	570	642	5.3	180 Lbs..	<b>\$10,170</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit



22 x 32 1/2 x 74    30 x 32 1/2 x 74    44 x 32 1/2 x 74    48 x 32 1/2 x 74    52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

Bin graphic applies to all models on this page



# CRESCENT® CUBERS | MODULAR



## KM-901M\_J(Z)(3)

30"W X 27 3/8"D X 32 1/2"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W   70°A/50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-901MAJ	208-230V/60/1	753	905	5.0	260	<b>\$14,080</b>
KM-901MWJ	208-230V/60/1	870	950	3.6	250	<b>\$14,390</b>
KM-901MRJZ*	208-230V/60/1	780	900	4.8	255	<b>\$13,680</b>
KM-901MRJZ3*	208-230V/60/3	830	927	4.0	250	<b>\$14,300</b>



Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit

## KM-1100M\_J(Z)

30"W X 27 3/8"D X 32 1/2"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W   70°A/50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ	208-230V/60/1	935	1087	4.9	290 Lbs.	<b>\$15,980</b>
KM-1100MWJ	208-230V/60/1	1006	1073	4.0	280 Lbs.	<b>\$15,850</b>
KM-1100MRJZ	208-230V/60/1	1030	1156	4.5	272 Lbs.	<b>\$15,400</b>

Model	Electrical	Kgs. of Ice per 24 hours 21°/10°C   32°/21°C		kWh per 45 kgs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ50	220-240V/50/1	356	464	5.7	136 kg.	<b>\$16,000</b>



Filter


Use URC-14FZ Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 78 1/2



44 x 32 1/2 x 78 1/2



48 x 32 1/2 x 78 1/2



52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



[CLICK HERE - ACCESSORIES](#)

# CRESCENT® CUBERS | MODULAR



## Stackable | KM|EDGE™

Hoshizaki's units are stackable for high volume production.




### KM-1301S\_J(Z)(3)

48"W X 27 3/8"D X 27 3/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W   70°A/ 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ	208-230V/60/1	1301	1365	4.3	338 Lbs.	<b>\$17,630</b>
KM-1301SWJ	208-230V/60/1	1230	1247	3.8	335 Lbs.	<b>\$17,770</b>
KM-1301SRJZ	208-230V/60/1	1260	1400	4.3	335 Lbs.	<b>\$17,470</b>
KM-1301SAJ3*	208-230V/60/3	1350	1427	4.0	335 Lbs.	<b>\$17,770</b>
KM-1301SWJ3	208-230V/60/3	1355	1360	3.3	338 Lbs.	<b>\$18,250</b>
KM-1301SRJZ3*	208-230V/60/3	1330	1433	3.8	335 Lbs.	<b>\$17,610</b>



Use URC-14FZ Condenser for Remote Air-Cooled Unit

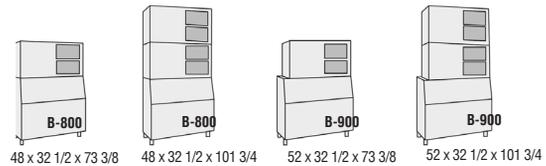

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.




### KM-1340M\_J(Z)(3)

30"W X 27 3/8"D X 41 1/2" H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W   70°A/50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1340MAJ*	208-230V/60/1	1089	1275	4.8	315 Lbs.	<b>\$17,600</b>
KM-1340MWJ	208-230V/60/1	1280	1323	3.6	315 Lbs.	<b>\$17,740</b>
KM-1340MRJZ	208-230V/60/1	1177	1371	4.5	289 Lbs.	<b>\$17,410</b>
KM-1340MRJZ3*	208-230V/60/3	1266	1428	4.1	289 Lbs.	<b>\$17,740</b>



Use URC-14FZ Condenser for Remote Air-Cooled Unit

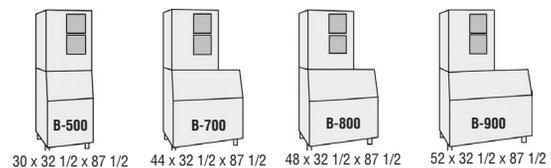

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



# CRESCENT® CUBERS | MODULAR



## Stackable | KM|EDGE™

Hoshizaki's units are stackable for high volume production.



### KM-1601MRJZ(3)

30"W X 27 3/8"D X 41 5/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601MRJZ	208-230V/60/1	1550	1594	4.4	316 Lbs.	<b>\$20,270</b>
KM-1601MRJZ3	208-230V/60/3	1550	1653	4.1	316 Lbs.	<b>\$20,680</b>



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 87 1/2



44 x 32 1/2 x 87 1/2



48 x 32 1/2 x 87 1/2



52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

### KM-1601S\_J(Z)(3)


48"W X 27 3/8"D X 27 3/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601SAJ	208-230V/60/1	1433	1513	4.2	345 Lbs.	<b>\$20,480</b>
KM-1601SWJ	208-230V/60/1	1650	1660	3.3	335 Lbs.	<b>\$20,530</b>
KM-1601SRJZ*	208-230V/60/1	1600	1640	4.0	315 Lbs.	<b>\$19,940</b>
KM-1601SAJ3	208-230V/60/3	1414	1513	4.4	350 Lbs.	<b>\$21,020</b>
KM-1601SWJ3	208-230V/60/3	1660	1671	3.3	345 Lbs.	<b>\$20,670</b>
KM-1601SRJZ3	208-230V/60/3	1600	1635	4.1	355 Lbs.	<b>\$20,380</b>



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 73 3/8



48 x 32 1/2 x 101 3/4



52 x 32 1/2 x 73 3/8



52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



[CLICK HERE - ACCESSORIES](#)

# CRESCENT® CUBERS | MODULAR



## Stackable | KM|EDGE

Hoshizaki's units are stackable for high volume production.



### KM-1900S\_J(Z)(3)


48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
<b>KM-1900SAJ*</b>	208-230V/60/1	1675	1875	3.9	415 Lbs.	<b>\$22,190</b>
<b>KM-1900SWJ</b>	208-230V/60/1	1875	1880	3.2	415 Lbs.	<b>\$22,310</b>
<b>KM-1900SRJZ*</b>	208-230V/60/1	1700	1933	3.9	415 Lbs.	<b>\$22,040</b>
<b>KM-1900SAJ3*</b>	208-230V/60/3	1675	1865	3.9	415 Lbs.	<b>\$22,310</b>
<b>KM-1900SWJ3</b>	208-230V/60/3	1875	1880	3.2	415 Lbs.	<b>\$22,920</b>
<b>KM-1900SRJZ3*</b>	208-230V/60/3	1700	1933	3.9	415 Lbs.	<b>\$22,190</b>



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit

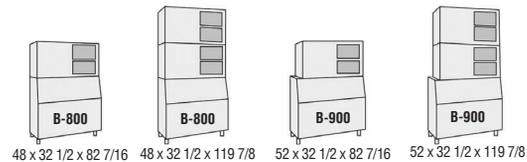

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



### KM-2200S\_J(Z)(3)


48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
<b>KM-2200SWJ3</b>	208-230V/60/3	2200	2221	3.1	400 Lbs.	<b>\$27,220</b>
<b>KM-2200SRJZ3*</b>	208-230V/60/3	2075	2206	3.8	400 Lbs.	<b>\$27,220</b>



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit

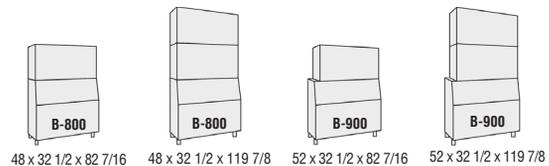

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



# CRESCENT® CUBERS | MODULAR



## Stackable | KM|EDGE™

Hoshizaki's units are stackable for high volume production.



### KM-2600S\_JZ(3)


48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W   70°A/50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KM-2600SWJ3</b>	208-230V/60/3	2480	2482	3.6	440 Lbs.	<b>\$31,200</b>
<b>KM-2600SRJZ3*</b>	208-230V/60/3	2580	2617	3.6	440 Lbs.	<b>\$29,890</b>



Filter

Use URC-26JZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 73 3/8    52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.  
See Top Kit Matrix on page 37 for additional bin options.



### KMH-2100S\_J(Z)(3)

36"W X 40"D X 36 7/16"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W   70°A/50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMH-2100SWJ3</b>	208-230V/60/3	2000	2060	2.9	415 Lbs.	<b>\$26,570</b>
<b>KMH-2100SRJZ*</b>	208-230V/60/1	1850	2034	3.8	415 Lbs.	<b>\$26,220</b>
<b>KMH-2100SRJZ3*</b>	208-230V/60/3	1925	2026	3.7	415 Lbs.	<b>\$26,360</b>



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit  
See Top Kit Matrix on page 37 for additional bin options.



[CLICK HERE - ACCESSORIES](#)

# CRESCENT® CUBERS | FOR DISPENSERS



## KMD-355M\_J

30"W X 24"D X 22"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-355MAJ	115V/60/1	352	395	5.8	179 Lbs.	<b>\$8,050</b>
KMD-355MWJ	115V/60/1	385	395	4.4	179 Lbs.	<b>\$8,230</b>

## KMD-505M\_J

KMD-505MAJ	115V/60/1	415	500	5.6	176 Lbs.	<b>\$9,040</b>
KMD-505MWJ	115V/60/1	555	592	4.2	176 Lbs.	<b>\$9,190</b>
KMD-505MRJZ	115V/60/1	490	560	5.7	176 Lbs.	<b>\$8,870</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit  
See Top Kit Matrix on page 45 for additional bin options.



## KMD-705M\_J

30"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-705MAJ	115V/60/1	620	721	4.8	200 Lbs.	<b>\$10,870</b>
KMD-705MWJ	115V/60/1	720	773	3.8	200 Lbs.	<b>\$11,320</b>
KMD-705MRJZ	115V/60/1	670	727	4.4	200 Lbs.	<b>\$10,700</b>



Filter

Use URC-9FZ Condenser for Remote Air-Cooled Unit  
See Top Kit Matrix on page 45 for additional bin options.



## KMD-860M\_J(Z)

30"W X 24 5/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-860MAJ	208-230V/60/1	665	855	5.2	248 Lbs.	<b>\$13,850</b>
KMD-860MWJ	208-230V/60/1	862	940	3.9	258 Lbs.	<b>\$14,100</b>
KMD-860MRJZ	208-230V/60/1	850	967	5.1	256 Lbs.	<b>\$13,720</b>



Filter

Use URC-9FZ Condenser for Remote Air-Cooled Unit

# LANCER

A HOSHIZAKI Company



For Dispensers visit  
our friends at Lancer  
Worldwide



30 x 30 1/2 x 39 5/8 30 x 32 1/2 x 68 1/8 48 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



# CRESCENT® CUBERS | FOR DISPENSERS



## SERENITY SERIES

**Serenity Series** machines utilize a remote condenser and compressor, enabling high-volume units to be placed in compact spaces while minimizing noise. See page 41 for **Remote Condensers (Required)**.



### KMS-822MLJ

22"W X 24 5/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMS-822MLJ</b> using 1 Phase Remote Condenser	208-230V/60/1*	770	851	5.3	150 Lbs.	<b>\$12,350</b>



Filter

Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



### KMS-1122MLJ

22"W X 18 1/8"D X 31 1/4"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMS-1122MLJ</b> using 1 Phase Remote Condenser	208-230V/60/1*	1075	1151	4.2	152 Lbs.	<b>\$13,210</b>
<b>KMS-1122MLJ*</b> using 3 Phase Remote Condense	208-230V/60/3*	1100	1151	4.0	152 Lbs.	<b>\$13,210</b>



Filter

Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



### KMS-1402MLJ

30"W X 24"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMS-1402MLJ</b> using 1 Phase Remote Condenser	208-230V/60/1*	1400	1501	4.3	178 Lbs.	<b>\$13,520</b>
<b>KMS-1402MLJ</b> using 3 Phase Remote Condense	208-230V/60/3*	1325	1474	4.6	178 Lbs.	<b>\$13,520</b>



Filter

Use SRK-15/15J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

### KMS-2000MLJ

30"W X 24"D X 32 7/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
<b>KMS-2000MLJ</b> using 1 Phase Remote Condenser	208-230V/60/1*	1850	1926	4.5	206 Lbs.	<b>\$16,600</b>
<b>KMS-2000MLJ</b> using 3 Phase Remote Condense	208-230V/60/3*	1900	1938	4.3	206 Lbs.	<b>\$16,600</b>



Filter

Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



# CUBELET




CHEWABLE, SOFT, SMALL NUGGET-SHAPED

Hoshizaki's chewable nugget-shaped ice is designed to enhance beverages with the perfect balance of texture and flavor absorption. Available in two options—Cubelet Ice and Soft Cubelet Ice—each type offers ideal consistency for easy dispensing and long-lasting enjoyment **perfect for hospitality, healthcare, offices, and food service.**



## Cubelet

- Chewable, soft, small nugget-shaped
- Available in 3 sizes

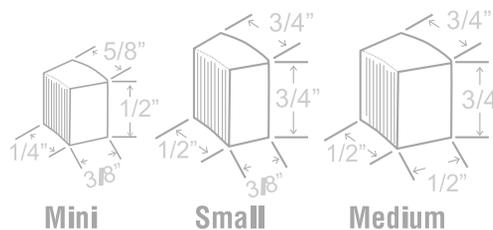




## What is Soft Cubelet Ice?

A smaller, softer version of cubelet ice, engineered to be truly chewable—easy on teeth and great for sipping and crunching. The porous nature absorbs flavor, making beverages taste more integrated, even toward the end of the drink.

## Soft Cubelet

- Smaller, softer nugget-shaped ice
- Scoop from bin only. Not intended to be dispensed.



# CUBELET | SELF-CONTAINED



## Undercounter Cubelets with Built-In Bin



-DS shown with Custom Cabinetry

### C-80BAK Mini Cubelet

14 7/8" W X 22 5/8" D X 33 1/2" H  
The ADA compliant machine dimensions are 14 7/8" W x 22 5/8" D x 31 1/2" H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
C-80BAK	115V/60/1	65	92	8.5	134 Lbs.	\$8,700
C-80BAK-DS	115V/60/1	65	92	8.5	134 Lbs.	\$8,960
C-80BAK-AD	115V/60/1	65	92	8.5	134 Lbs.	\$8,720
C-80BAK-ADDS	115V/60/1	65	92	8.5	134 Lbs.	\$9,150



Filter

Self-Contained Bin Storage Capacity Up to 22 Lbs.  
UL approved for outdoor use ADA compliant

†-DS Models - Wood Door System  
(Designed to accommodate custom cabinetry)



### F-330BAJ-C Mini Cubelet

24" W X 26" D X 39" H (6" Legs Included)



Filter

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	90°A / 70°W	70°A / 50°W			
115V/60/1	214	288	7.3	178 Lbs.	\$12,290

Self-Contained Bin Storage Capacity Up to 80 Lbs.

### F-450MAJ-C Mini Cubelet


22" W X 27 3/8" D X 22" H



Filter

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	90°A / 70°W	70°A / 50°W			
115V/60/1	316	412	6.1	170 Lbs.	\$11,400

\*Not recommended for dispensing applications.

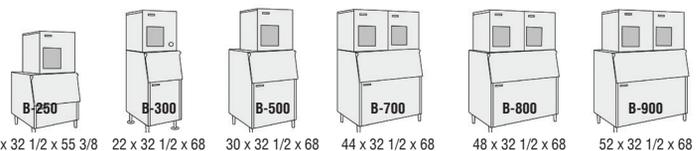

30 x 32 1/2 x 55 3/8    22 x 32 1/2 x 68    30 x 32 1/2 x 68    44 x 32 1/2 x 68    48 x 32 1/2 x 68    52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.




# CUBELET | SELF-CONTAINED



## F-801M\_J-C Small Cubelet

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ-C*	115V/60/1	532	690	5.00	205 Lbs.	<b>\$14,460</b>
F-801MWJ-C	115V/60/1	580	632	4.13	205 Lbs.	<b>\$14,320</b>

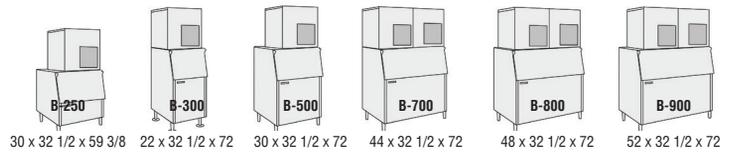


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

## F-1002M\_J(Z)-C Small Cubelet

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1002MAJ-C	115V/60/1	726	890	4.57	210 Lbs.	<b>\$16,750</b>
F-1002MWJ-C	115V/60/1	770	878	3.95	205 Lbs.	<b>\$16,910</b>
F-1002MRJZ-C	115V/60/1	680	821	4.94	210 Lbs.	<b>\$17,000</b>

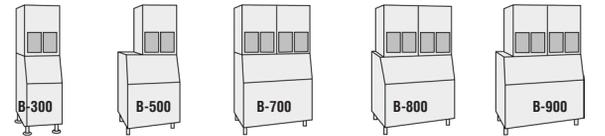

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

Use URC-5FZ Condenser for Remote Air-Cooled Unit



## F-1501M\_J(Z)-C Medium Cubelet

30"W X 27 3/8"D X 34 7/16"H


Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1501MAJ-C	208-230V/60/1	1020	1327	4.61	325 Lbs.	<b>\$21,880</b>
F-1501MWJ-C	208-230V/60/1	1218	1376	3.76	330 Lbs.	<b>\$22,010</b>
F-1501MRJZ-C	208-230V/60/1	1054	1353	4.50	325 Lbs.	<b>\$21,710</b>



Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
208-230V/60/1	1500 1832	4.35	345 Lbs.	<b>\$28,480</b>

Use URC-14FZ Condenser for Remote Air-Cooled Unit

Use URC-22FZ Condenser for Remote Air-Cooled Unit

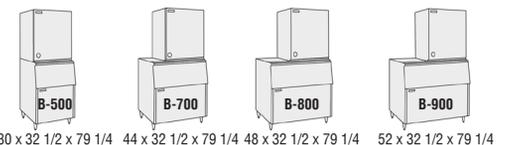

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



[CLICK HERE - ACCESSORIES](#)



# CUBELET | BEVERAGE DISPENSER



## FD-650M\_J(Z)-C Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
FD-650MAJ-C	115V/60/1	495	634	5.5	185 Lbs.	<b>\$13,470</b>
FD-650MWJ-C	115V/60/1	520	622	4.0	185 Lbs.	<b>\$13,800</b>
FD-650MRJZ-C*	115V/60/1	470	588	5.0	185 Lbs.	<b>\$13,470</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

## FD-1002M\_J(Z)-C Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
FD-1002MAJ-C	115V/60/1	726	890	4.6	210 Lbs.	<b>\$16,820</b>
FD-1002MRJZ-C	115V/60/1	680	821	4.9	210 Lbs..	<b>\$16,830</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

Available in all stainless steel (-C) or gloss black vinyl clad front cover with stainless steel top and sides (-CB).



## FD-1002M\_J(Z)-CB Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
FD-1002MAJ-CB	115V/60/1	726	890	4.6	210 Lbs.	<b>\$16,830</b>
FD-1002MRJZ-CB	115V/60/1	680	821	4.9	210 Lbs..	<b>\$17,510</b>



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



# CUBELET | BEVERAGE DISPENSER

## SERENITY SERIES

Serenity Series machines utilize a remote condenser and compressor, enabling high-volume units to be placed in compact spaces while minimizing noise. See page 41 for **Remote Condensers (Required)**.




### FS-1001MLJ-C Small Cubelet

30"W X 11"D X 26"H

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	Shipping Weight	List F.O.B. Griffin
	115V/60/1	720	851	5.1	166 Lbs.	166 Lbs.	<b>\$15,080</b>

Use SRC-10J Condenser for Remote Air-Cooled Unit



### FS-1022MLJ-C Small Cubelet

22"W X 16 1/2"D X 26"H

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	Shipping Weight	List F.O.B. Griffin
	115V/60/1	730	889	5.1	150 Lbs.	150 Lbs.	<b>\$17,040</b>

Designed for use on beverage dispensers.

Use SRC-10J Condenser for Remote Air-Cooled Unit



### FS-1501MLJ-C Medium Cubelet

30"W X 16 1/2"D X 34 1/4"H

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	Shipping Weight	List F.O.B. Griffin
	115V/60/1	1125	1386	4.75	229 Lbs.	229 Lbs.	<b>\$18,880</b>

Designed for use on beverage dispensers.

Use SRC-14J Condenser for Remote Air-Cooled Unit



# Creative Cocktails

## HOSHIZAKI SPECIALTY ICE

### ELEVATE YOUR COCKTAIL PROGRAM




- ◆ Create upscale signature cocktails
- ◆ Increase revenue per cocktail
- ◆ Perfect amount of chilling with minimal dilution
- ◆ Perfect for preparation & presentation



-DS shown with Custom Cabinetry



### AM Cubers with Built-In Bins



#### AM-50BAK

14 7/8" W X 22 5/8" D X 33 1/2" H

The ADA compliant machine dimensions are 147/8" W x 225/8" D x 311/2" H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
AM-50BAK	115V/60/1	35	51	17	113 Lbs.	\$6,000
AM-50BAK-DS	115V/60/1	35	51	17	113 Lbs.	\$6,080
AM-50BAK-AD	115V/60/1	34	55	16.8	112 Lbs.	\$6,190
AM-50BAK-ADDS	115V/60/1	34	55	16.8	112 Lbs.	\$6,380




†-DS Models - Wood Door System  
(Designed to accommodate custom cabinetry)

Self-Contained Bin Storage Capacity Up to 22 Lbs.


Scan to view Specialty Ice Machines



# SPECIALTY ICE



## 1by1 Cube with Built-In Bin



**IM-200BAK**


39 1/2" W X 23 5/8" D X 33 1/2" H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	150	188	6.5	212 Lbs.	<b>\$9,910</b>

Self-Contained Bin Storage Capacity Up to 75 Lbs.




## 1by1 Cube Stackable Cuber



**IM-500SAB**

44" W x 27-5/8" D x 21-3/4"

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	414	489	5.8	234 Lbs.	<b>\$12,410</b>

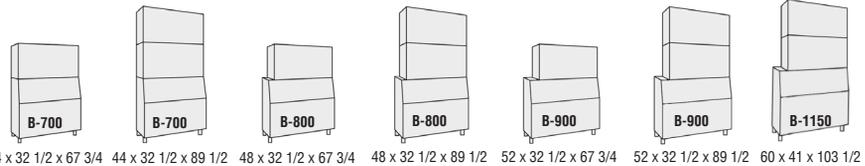


44 x 32 1/2 x 67 3/4 44 x 32 1/2 x 89 1/2 48 x 32 1/2 x 67 3/4 48 x 32 1/2 x 89 1/2 52 x 32 1/2 x 67 3/4 52 x 32 1/2 x 89 1/2 60 x 41 x 103 1/2

See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



## Sphere Ice Machine with Built-In Bin



**IM-50BAA-Q**


24 3/4" W X 20 3/4" D X 39 1/2" H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Cubes produced in 24 hour period	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	45	50	15.7	~ 475	168 Lbs.	<b>\$12,840</b>

Self-Contained Bin Storage Capacity Up to 36 Lbs.



## 2by2 Cube with Built-In Bin



**IM-50BAA-LM**

19 3/4" W X 17 3/4" D X 39 1/2" H (6" Legs Included)


Filter	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Cubes produced in 24 hour period	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	45	50	15.7	~ 172	137 Lbs.	<b>\$12,410</b>

Self-Contained Bin Storage Capacity Up to 22 Lbs.

[CLICK HERE - ACCESSORIES](#)



# Flaker



SOFT, LIGHT, MOLDABLE, VARIOUS SHAPES

Flaked ice is relatively dry and cools more quickly than other forms of ice. A 2-second flush of the evaporator occurs every hour to reduce impurity and mineral build up, improving sanitation and reliability.



## Undercounter FLAKER with Built-In Bin

### F-330BAJ

24"W X 26"D X 39"H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
	115V/60/1	243	332	6.0	178 Lbs.	\$11,900

Self-Contained Bin Storage Capacity Up to 80 Lbs.

### F-450MAJ


22"W X 27 3/8"D X 22"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
	115V/60/1	395	492	4.9	170 Lbs.	\$11,140

### F-801M\_J

22"W X 27 3/8"D X 26"H


Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-801MAJ*	115V/60/1	566	751	4.5	205 Lbs.	\$13,710
F-801MWJ	115V/60/1	605	680	3.9	205 Lbs.	\$13,850

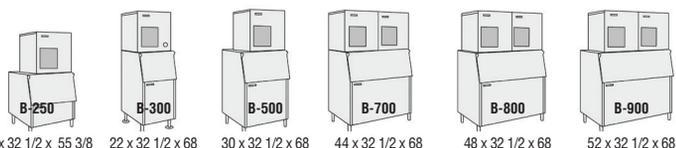

30 x 32 1/2 x 55 3/8    22 x 32 1/2 x 68    30 x 32 1/2 x 68    44 x 32 1/2 x 68    48 x 32 1/2 x 68    52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.






## F-1002M\_J(Z)

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-1002MAJ	115V/60/1	758	980	4.4	210 Lbs.	<b>\$16,440</b>
F-1002MWJ	115V/60/1	833	955	3.6	205 Lbs.	<b>\$16,910</b>
F-1002MRJZ	115V/60/1	722	907	4.5	210 Lbs.	<b>\$16,280</b>
F-1002MLJ	115V/60/1	797	1028	1.5	150 Lbs.	<b>\$16,130</b>



Use URC-5F Condenser for Remote Air-Cooled Unit

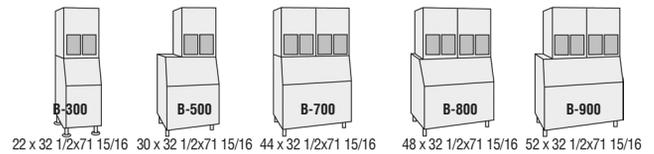

22 x 32 1/2 x 71 15/16 30 x 32 1/2 x 71 15/16 44 x 32 1/2 x 71 15/16 48 x 32 1/2 x 71 15/16 52 x 32 1/2 x 71 15/16

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

## F-2001M\_J(Z)(3)


30"W X 27 1/2"D X 34 5/8"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-2001MWJ	208-230V/60/1	1840	2043	3.2	342 Lbs.	<b>\$27,950</b>
F-2001MRJZ	208-230V/60/1	1660	2073	3.8	360 Lbs.	<b>\$27,800</b>
F-2001MRJZ3	208-230V/60/3	1675	2098	3.9	360 Lbs.	<b>\$27,950</b>
F-2001MLJ	115V/60/1	1733	2280	0.6	250 Lbs.	<b>\$25,780</b>

## F-1501M\_J(Z)

30" W x 27-3/8" D x 34-5/8" H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-1501MAJ	208-230V/60/1	1154	1543	4.0	325 Lbs.	<b>\$21,450</b>
F-1501MWJ	208-230V/60/1	1410	1624	3.2	350 Lbs.	<b>\$21,600</b>
F-1501MRJZ	208-230V/60/1	1181	1532	4.0	325 Lbs.	<b>\$20,900</b>

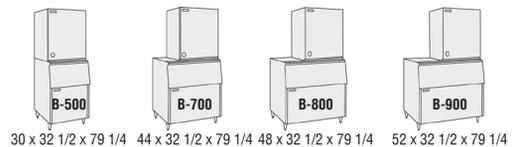

30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.



# DISPENSERS

## CRESCENT® AND CUBELET ICE FOR DISPENSERS

**Hydration Made Easy!** Hoshizaki offers a complete range of ice and water dispensers, including options for Crescent® or Cubelet ice, as well as both countertop and freestanding units. Each dispenser is designed to produce and store varying amounts of ice, ensuring that you can find the perfect fit for your needs, whether for a cozy office break room or a bustling hotel. Enjoy having ice-cold drinks and refreshing water readily available! - be it a small office breakroom or a busy high-rise hotel.

### Features & Benefits

- Attractive stainless steel exterior provides long life and easy maintenance
- Three dimensional agitation prevents clumping and assists in delivering ice conveniently
- DB Series accommodates KMEdge™ Series Cubers
- DCM Series dispenses easy to chew cubelet ice and water
- All dispensers feature built-in ice storage capacity





 **OptiServe**  
TOUCHLESS ICE & WATER

- Hands free dispensing that helps eliminate cross contamination
- For sanitary use in breakroom areas, lobbies, nursing stations, cafeterias and more -
- Hoshizaki's DCM dispensers can sit on top of a counter or stand for additional storage



IDEAL FOR HEALTHCARE OPERATIONS

# DISPENSERS | SELF-CONTAINED



## DCM-271BAK Mini Cubelet

16 5/8" W X 24 1/4"D X 31 3/4"H (4" Legs Included)

Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	196	257	6.9	154 Lbs.	<b>\$11,790</b>

Self-Contained Bin Storage Capacity Up to 10 Lbs.

NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



On a counter without legs or on a stand



Floor Model  
with Optional Stand  
16 9/16 x 24 1/8 x 66 7/8  
W x D x H



Counter-Top  
with 4" Legs  
16 9/16 x 24 1/8 x 31 11/16  
W x D x H



## DCM-300BAH Mini Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Condenser	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	232	321	6.8	220 Lbs.	<b>\$15,030</b>

Self-Contained Bin Storage Capacity Up to 40 Lbs.

## DCM-500B\_H/K Small Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH/K	115V/60/1	450	618	5.6	255 Lbs.	<b>\$18,980</b>
DCM-500BWH/K	115V/60/1	512	590	4.5	255 Lbs.	<b>\$19,130</b>

Self-Contained Bin Storage Capacity Up to 40 Lbs.



## DCM-75\_B\_K Small Cubelet

34 1/16"W X 28 1/2"D X 48 1/16"H  
(Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-700BAK	115V/60/1	576	708	5.1	345 Lbs.	<b>\$24,810</b>
DCM-751BWH	115V/60/1	678	782	4.8	345 Lbs.	<b>\$25,260</b>

Self-Contained Bin Storage Capacity Up to 95 Lbs.



DCM-752BAH  
is now **DCM-700BAK**



Counter-Top  
26 x 22 1/2 x 40  
W x D x H



Counter-Top  
with Optional 6" Legs  
26 x 22 1/2 x 46  
W x D x H



Floor Model  
with Optional Stand  
26 x 22 1/2 x 72 1/2  
W x D x H



# DISPENSERS | SELF-CONTAINED



Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

## DCM-271BAK-OS Mini Cubelet

16 5/8" W X 24 1/4" D X 31 3/4" H (4" Legs Included)

Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	90°A / 70°W	70°A / 50°W			
115V/60/1	196	257	6.9	154 Lbs.	<b>\$11,950</b>

NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



On a counter without legs or on a stand

Self-Contained Bin Storage Capacity Up to 10 Lbs.



Floor Model with Optional Stand  
16 5/8 x 24 1/4 x 66 7/8 W x D x H



Counter-Top with 4" Legs  
16 5/8 x 24 1/4 x 31 3/4 W x D x H



## DCM-300BAH/K-OS Mini Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	90°A / 70°W	70°A / 50°W			
115V/60/1	232	321	6.8	240 Lbs.	<b>\$15,500</b>

Self-Contained Bin Storage Capacity Up to 40 Lbs.

## DCM-500B\_H/K-OS Small Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
DCM-500BAH-OS	115V/60/1	450	618	5.6	276 Lbs.	<b>\$19,120</b>
DCM-500BWH-OS	115V/60/1	512	590	4.5	269 Lbs.	<b>\$19,370</b>

Self-Contained Bin Storage Capacity Up to 40 Lbs.



## DCM-75\_B\_K-OS Small Cubelet

34 1/16"W X 28 1/2"D X 48 1/16"H  
(Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
DCM-700BAK-OS	115V/60/1	576	708	5.1	345 Lbs.	<b>\$24,970</b>
DCM-751BWH-OS	115V/60/1	678	782	4.8	345 Lbs.	<b>\$25,650</b>

Self-Contained Bin Storage Capacity Up to 95 Lbs.

Units supplied without legs



DCM-752BAH -OS is now **DCM-700BAK-OS**

FOR: DCM 300BAH/500B\_H/75\_B\_H



Counter-Top  
26 x 22 1/2 x 40  
W x D x H



Counter-Top with Optional 6" Legs  
26 x 22 1/2 x 46  
W x D x H



Floor Model with Optional Stand  
26 x 22 1/2 x 72 1/2  
W x D x H



[CLICK HERE - ACCESSORIES](#)

# DISPENSERS




## KMEDGE Crescent® DB Dispensers



**DM-200B**

30"W X 28"D X 36 3/8"H

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	200 Lbs.	7.5 lbs. / min.	N/A	N/A	210 Lbs.	<b>\$9,850</b>



Counter-Top  
30 x 28 x 36 3/8  
W x D x H



Counter-Top  
with optional 4" legs  
30 x 28 x 40 3/8  
W x D x H

Unit supplied without legs  
Only dispenses crescent ice



## Cubelet Ice & Water Dispenser



**DM-4420N**

22"W X 30 1/2"D X 40"H

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	200 Lbs.	N/A	N/A	N/A	185 Lbs.	<b>\$10,810</b>



Canadian Energy  
Performance Verified  
Rendement Energetique Verified



Hoshizaki's Stands are specifically designed to support ice machines and dispensers, making them more accessible while also providing storage for accessories and tools.

**SEE PAGE 36 FOR DISPENSER STANDS**

[CLICK HERE - ACCESSORIES](#)

# HOTEL DISPENSERS




## KM|EDGE Crescent® DB Dispensers

### DB-130H

22"W X 30"D X 53"H (6" Legs Included)

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	130 Lbs.	20 lbs. / min.	N/A	220 Lbs.	<b>\$8,340</b>



22 x 30 x 53  
W x D x H

**KM-350/520/660M**  
Cuber sold separately  
22 x 30 x 81  
W x D x H



### DB-200H

30"W X 30"D X 53"H (6" Legs Included)

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	200 Lbs.	13 lbs. / min.	N/A	220 Lbs.	<b>\$9,520</b>



30 x 30 x 53  
W x D x H

**KML-325/500**  
Cuber sold separately  
30 x 30 x 75  
W x D x H

**KML-700**  
Cuber sold separately  
30 x 30 x 79  
W x D x H



On a counter without legs or on a stand



## DB Water Dispenser CONVERSION KIT



Convert existing DB-130H or DB-200H ice only dispensers to an ice and water dispenser with HS-5749. (shown with KMD-705MAJ)



On a counter without legs or on a stand



[CLICK HERE - ACCESSORIES](#)

# DISPENSER | STANDS / BAGGERS



Hoshizaki's Stands are specifically designed to support ice machines and dispensers, making them more accessible while also providing storage for accessories and supplies.

Model Number	Use with Ice Machine / Dispenser Model	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>SD-200</b>	DM-200B	30" x 28" x 32 <sup>13/16"</sup>	105 lbs.	<b>\$2,640</b>
<b>SD-271</b>	DCM-271 (-OS)	16 <sup>1/2"</sup> x 24" x 35 <sup>3/16"</sup>	85 lbs.	<b>\$1,980</b>
<b>SD-500</b>	DCM-300 (-OS) / DCM-500 (-OS)	25 <sup>7/8"</sup> x 22" x 32 <sup>3/4"</sup>	90 lbs.	<b>\$2,200</b>
<b>SD-750</b>	DCM-751 (-OS) / DCM-752 (-OS)	34" x 28" x 32 <sup>3/4"</sup>	110 lbs.	<b>\$2,660</b>



- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance
- Attractive stainless steel exterior
- Locking doors standard

<b>HCD ICE BAGGING SYSTEM SERIES</b>	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H	Shipping Weight	List F.O.B. Kloppenberg
	<b>HCD-500B</b>	Stainless Steel	647 Lbs.	30" x 36" x 71"	510 Lbs.	<b>\$35,130</b>
<b>HCD-1000B</b>	Stainless Steel	1078 Lbs.	48" x 36" x 71"	590 Lbs.	<b>\$44,470</b>	

48" heavy duty ice paddle included





Use this chart to determine if your Ice Maker will require a “Top Kit” adapter to fit on your preferred bin.

	22" Width KM-350M KM-520M KM-660M F-450M F-801M F-1002M	22" Width KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	30" Width KM-901M KM-1100M KM-1340M KM-1601M KML Series F-1501M F-2001	30" Width KMD-355M KMD-505M KMD-705M KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	44" Width 2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	44" Width 2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	48" Width KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S	60" Width 2 KM-901M 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501/2001M 2 KMD Series**
22" Width B-300SF DB-130H	—	HS-2153 (KMD-410 on B-300 only) (KMD-410 not compatible with DB-130H)	N/A	N/A	N/A	N/A	N/A	N/A
BD-300SF†	N/A	—	N/A	N/A	N/A	N/A	N/A	N/A
30" Width B-250SF B-500SF	HS-2033	HS-2033 & HS-2129	—	HS-2129	N/A	N/A	N/A	N/A
BD-500SF†	N/A	N/A	N/A	— (Only fits KMD Units)	N/A	N/A	N/A	N/A
44" Width B-700SF	HS-2035	HS-2035 & HS-2130	HS-2034	HS-2130 & HS-2034	—	HS-2130 (KMD-410M doesn't apply.)	N/A	N/A
48" Width B-800SF	HS-2035 & HS-2032	HS-2035, HS-2032 & HS-2131	HS-2034 & HS-2032	HS-2131, HS-2034 & HS-2032	HS-2032	HS-2032 & HS-2131	—	N/A
48" Width B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED & HS-2147	IM & F UNITS ONLY (HS-5397 for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
52" Width B-900SF	HS-2035 & HS-2033	HS-2035, HS-2033 & HS-2132	HS-2035	HS-2132 & HS-2035	HS-2033	HS-2033 & HS-2132	HS-2032	N/A
60" Width B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED & HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED (HS-5397 for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
30" Width DB-200H DM-200B	HS-2036 (Only fits KM Units)	N/A	— (KML Series only)	NEED HS-2148 (KMD Series on DB-200H only)	N/A	N/A	N/A	N/A

— No top kit necessary | N/A Combination of ice maker and bin is not possible

\*Except KMD-410M (See 22" Wide), †BD Bins Fit 24" to 24 1/2" Deep Ice makers w/o Top Kit, ‡HS-5065 Req'd for Air Cooled KMD-460/530MAJ

### KMS<sup>§</sup>, KMD, or FD on Bin Need Top Kit Extension:

Model Number	For Use With
HS-2129	B-250SF / B-500 Bins
HS-2130	B-700 Bins
HS-2131	B-800 Bins
HS-2132	B-900 Bins
HS-2147	B-1150 & 1300 Bins
HS-2153	B-300 Bins
HS-5424	KMD on DB-130
HS-2032	4" ABS Top Kit
HS-2033	8" ABS Top Kit

Model Number	Description
HS-2034	14" ABS Top Kit
HS-2035	22" ABS Top Kit
HS-2036	(2) 4" ABS Top Kits for KM on DB-200H
HS-2066	Seismic Kit for SD 500 Stands
HS-2071	Anchored Leg Kit SD 500 Stands
HS-2111	11.3" x 26.2" Stainless Cover/Separator
HS-2148	30" x 3.1" Stainless Cover
HS-2153	KMD-410 on B-300 bin
HS-2160	2 KM-901M
HS-5065	Front Panel Filter Kit for KMD-460/530M
HS-5397	Bin Control Kit for IM-500 on B-1150/1300/1500/1650

§Except KMS-1122MLJ

36" Width - KMH-2100S - Fit Kloppenberg Bins Only (Sold Separately)

# ICE | STORAGE BINS

The non-corrosive bin liner guarantees safe and sanitary ice storage. The foamed-in-place polyurethane insulation in all side walls and bottom of the bin provide reliable ice storage.

## B-250SF



Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	250 Lbs.	30" x 32 1/3" x 33 3/8"	110 Lbs.	<b>\$2,840</b>

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations

## B-300SF BD-300SF\*\*



Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>B-300SF</b>	Stainless Steel	300 Lbs.	22" x 32 1/3" x 46"	125 Lbs.	<b>\$2,920</b>

Four 6" Painted Flanged Legs included  
Refer to Top Kit Matrix for necessary configurations

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>BD-300SF</b>	Stainless Steel	300 Lbs.	22" x 32 1/3" x 46"	130 Lbs.	<b>\$3,000</b>

For use with **KMD-410M, KMS-822M, FD-650M-C, FD-1001M-C**  
\*\*BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension

## B-500SF BD-500SF\*\*



Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>B-500SF</b>	Stainless Steel	500 Lbs.	30" x 32 1/2" x 46"	140 Lbs.	<b>\$3,240</b>

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>BD-500SF</b>	Stainless Steel	500 Lbs.	30" x 32 1/2" x 46"	140 Lbs.	<b>\$3,370</b>

For use with **KMD-460M, KMD-530M, KMD-860M**  
\*\*BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension

Four 6" Painted Legs included



Scan to view  
most recent  
Matrix

# ICE | STORAGE BINS



## B-700SF

Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	700 Lbs.	44" x 32 1/3" x 46"	175 Lbs.	<b>\$4,020</b>

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations



## B-800SF

Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	800 Lbs.	48" x 32 1/3" x 46"	185 Lbs.	<b>\$4,340</b>

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations



## B-900SF

Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	900 Lbs.	52" x 32 1/3" x 46"	195 Lbs.	<b>\$4,560</b>

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations



## B-1150SS / B-1300SS

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>B-1150SS</b>	Stainless Steel	1148 Lbs.	48" x 41" x 60 3/16"	315 Lbs.	<b>\$9,410</b>
<b>B-1300SS</b>	Stainless Steel	1304 Lbs.	48" x 41" x 66 3/16"	330 Lbs.	<b>\$9,740</b>

Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30%  
Universal top included - Check Top Kit Application Guide for detail



## B-1500SS / B-1650SS


Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
<b>B-1500SS</b>	Stainless Steel	1500 Lbs.	60" x 41" x 62 3/16"	360 Lbs.	<b>\$10,620</b>
<b>B-1650SS</b>	Stainless Steel	1605 Lbs.	60" x 41" x 66 3/16"	375 Lbs.	<b>\$10,970</b>

Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30%  
Universal top included - Check Top Kit Application Guide for detail

# REMOTE | CONDENSER

## AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

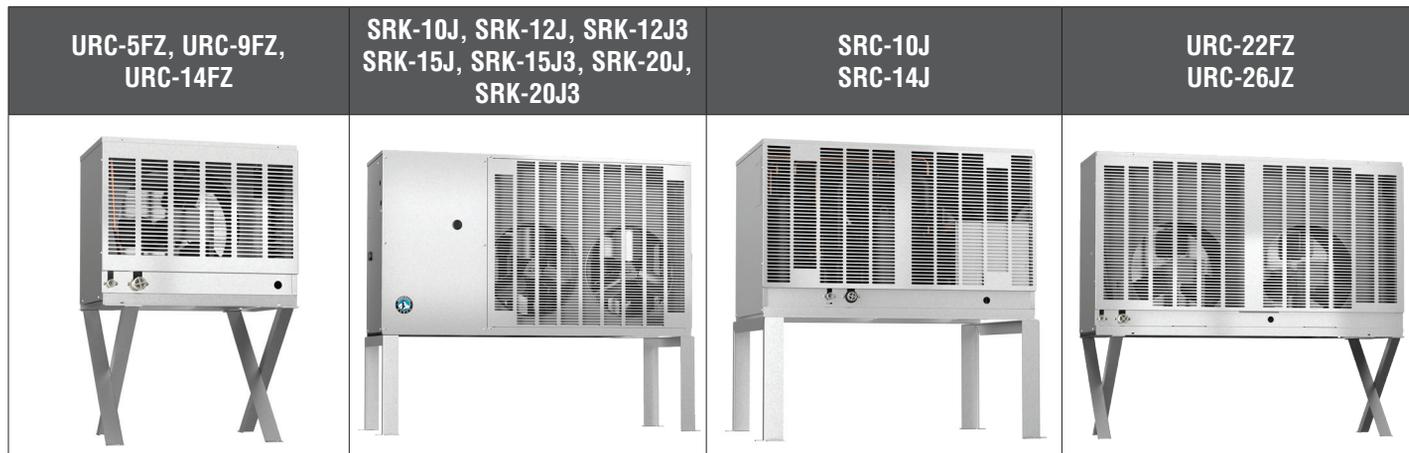

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-5FZ</b>	KM-520MRJZ, KMD-505MRJZ, KMD-530MRJZ, KM-660MRJZ, FD-650MRJZ-C, FD-1002MRJZ-C, F-1002MRJZ-C	115V/60/1	21 <sup>13/16</sup> " x 14 <sup>1/16</sup> " x 32 <sup>13/16</sup> "	90 Lbs.	<b>\$2,310</b>
<b>URC-9FZ</b>	KML-700MRJZ, KMD-705MRJZ, KMD-860MRJZ	115V/60/1	35 <sup>11/16</sup> " x 14 <sup>1/16</sup> " x 36 <sup>1/2</sup> "	90 Lbs.	<b>\$2,770</b>
<b>SRC-10J</b>	FS-1001MLJ-C, FS-1022MLJ-C	230V/60/1	35 <sup>3/4</sup> " x 23 <sup>1/2</sup> " x 37"	230 Lbs.	<b>\$6,100</b>
<b>SRK-10J</b>	KMS-822MLJ	230V/60/1**	38" x 29" x 37"	230 Lbs.	<b>\$7,070</b>
<b>SRK-12J</b>	KMS-1122MLJ	230V/60/1**	52 <sup>3/8</sup> " x 19 <sup>1/2</sup> " x 43"	275 Lbs.	<b>\$7,850</b>
<b>SRK-12J3</b>	KMS-1122MLJ	230V/60/3	52 <sup>3/8</sup> " x 19 <sup>1/2</sup> " x 43"	275 Lbs.	<b>\$8,170</b>
			**3 wire with neutral for 115V		
<b>SRC-14J</b>	FS-1501MLJ-C	230V/60/1**	37 <sup>3/4</sup> " x 26 <sup>5/8</sup> " x 37"	220 Lbs.	<b>\$7,490</b>
<b>SRK-15J</b>	KMS-1402MLJ	230V/60/1	52 <sup>3/8</sup> " x 19 <sup>1/2</sup> " x 43"	275 Lbs.	<b>\$8,720</b>
<b>SRK-15J3</b>	KMS-1402MLJ	230V/60/3	52 <sup>3/8</sup> " x 19 <sup>1/2</sup> " x 43"	275 Lbs.	<b>\$8,880</b>

# REMOTE | CONDENSER

For Use With Crescent®, Flaker And Cubelet Ice Makers. See Pages 11, 20, And 29.

\*\*3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-14FZ</b>	KM-901MRJZ(3), KM-1100MRJZ, KM-1301SRJZ(3), KM-1340MRJZ(3), F-1501MRJZ(-C)	115V/60/1	35 <sup>11/16</sup> " x 14 <sup>1/16</sup> " x 36 <sup>1/2</sup> "	110 Lbs.	<b>\$2,920</b>

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>SRK-20J</b>	KMS-2000MLJ	230V/60/1	62" x 21" x 45"	345 Lbs.	<b>\$14,800</b>
<b>SRK-20J3</b>	KMS-2000MLJ	230V/60/3	62" x 21" x 45"	345 Lbs.	<b>\$15,220</b>

\*\*3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
<b>URC-22FZ</b>	KM-1601MRJZ(3), KM-1601SRJZ(3), KM-1900SRJZ(3), KM-2200SRJZ(3), KMH-2100SRJZ3, F-2001MRJZ(3)(-C)	115V/60/1	46 <sup>3/8</sup> " x 14 <sup>1/16</sup> " x 40 <sup>1/2</sup> "	130 Lbs.	<b>\$4,060</b>
<b>URC-26JZ</b>	KM-2600SRJZ3	115V/60/1	46 <sup>3/8</sup> " x 14 <sup>1/16</sup> " x 40 <sup>1/2</sup> "	150 Lbs.	<b>\$5,380</b>

## REMOTE CONDENSER MATRIX

Non-Precharged Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
<b>URC-5FZ</b>	KM-520MRJZ, KM-660MRJZ, KMD-505MRJZ, FD-650MRJZ-C, F-1002MRJZ(-C), FD-1002MRJZ(-C)	90 Lbs.	HS-5587	HS-5588	N/A
<b>URC-9FZ</b>	KML-700MRJZ, KMD-705MRJZ, KMD-860MRJZ	90 Lbs.	HS-5604	HS-5605	HS-5606
<b>URC-14FZ</b>	KM-901MRJZ(3), KM-1100MRJZ, KM-1301SRJZ(3), KM-1340MRJZ(3) F-1501MRJZ(-C)	100 Lbs.	HS-5604	HS-5605	HS-5606
<b>URC-22FZ</b>	KM-1601MRJZ(3), KM-1601SRJZ(3), KM-1900SRJZ(3), KM-2200SRJZ(3), KMH-2100SRJZ(3), F-2001MRJZ(3)(-C)	130 Lbs.	HS-5323	HS-5324	HS-5325
<b>URC-26JZ</b>	KM-2600SRJZ3	150 Lbs.	HS-5323	HS-5324	HS-5325

Non-Precharged Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
<b>SRC-10J</b>	FS-1001MLJ-C, FS-1022MLJ-C	230 Lbs.	HS-5299*	HS-5300*	HS-5301*
<b>SRK-10J</b>	KMS-822MLJ	230 Lbs.	HS-0250*	HS-0251*	HS-0252*
<b>SRK-12J</b> <b>SRK-12J3</b>	KMS-1122MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
<b>SRC-14J</b>	FS-1501MLJ-C	220 Lbs.	HS-5323*	HS-5324*	HS-5325*
<b>SRK-15J</b> <b>SRK-15J3</b>	KMS-1402MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
<b>SRK-20J</b> <b>SRK-20J3</b>	KMS-2000MLJ	345 Lbs.	HS-0243*	HS-0244*	HS-0245*

\*Line sets require refrigerant

# WATER | FILTRATION

**HOSHIZAKI Water Filters** are designed to eliminate particles as small as 1 micron, ensuring the highest quality ice and water available. Providing clean and healthy water is crucial, particularly in healthcare and educational environments.

Model Number	Description	Aprox. Ice Production	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
<b>H9320-51</b> Use E-10 10" Prefilter	Single	< 700 lbs / 24 hours	AM-50, KM-81, 116, 161 KM-231, 301	KM-350, 520, 660, KMD-355, 410, 505, 705	IM-200,500 IM-50BAA-LM	All Models	All Models
<b>H9320-52</b> Use E-20 20" Prefilter	Twin	800 - 1100 lbs / 24 hours	N/A	KM-901, 1100, KMD-860 KMS-822, 1122, 1402	IM-50BAA-Q	N/A	N/A
<b>H9320-53</b> Use E-20 20" Prefilter	Triple	1200 - 2600* lbs / 24 hours	N/A	KM-1301, 1340, 1601, 1900, 2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
<b>H9655-11</b>	Replacement Cartridge (1) One each	*For installations producing more than 2.6K lbs, water filters are required on each water line; water line split must occur from the water source; not as a T- or Y-connection from supply. For more information on proper installation for systems exceeding 2.6L lbs, please contact Hoshizaki Tech Services at 800-233-1940.					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

Water Filters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
<b>H9320-51</b>	Single	18.4" H	<b>\$600</b>
<b>H9320-52</b>	Twin	19.11" H	<b>\$1,010</b>
<b>H9320-53</b>	Triple	19.15" H	<b>\$1,420</b>
<b>H9320-54</b>	4H-SI (medical) Single	18.1" H	<b>\$650</b>
<b>H9655-11</b>	Replacement Cartridge each	N/A	<b>\$250</b>
<b>H9655-06</b>	Replacement Cartridge (6 pk)	N/A	<b>\$1,120</b>
<b>H9655-08</b>	4H-SI (medical) Cartridge (1 pk)	18.1" H	<b>\$450</b>

Prefilters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
<b>9534-26</b>	E-20 Replacement Cartridges (6 pk)	20"	<b>\$280</b>
<b>9534-12</b>	E-10 Replacement Cartridges (12 pk)	10"	<b>\$290</b>
<b>9534-20</b>	E-20 Replacement Cartridges (20 pk)	20"	<b>\$590</b>
<b>9534-40</b>	E-10 Replacement Cartridges (40 pk)	10"	<b>\$570</b>
<b>9795-80</b>	E-10 Prefilter	10"	<b>\$350</b>
<b>9795-90</b>	E-20 Prefilter	20"	<b>\$450</b>



# SANITIZING AND MONITORING

Advanced ozone-treated water sanitizes the ice machine, bin, and related parts. Can be used on all Hoshizaki ice machines except ice and water dispensers.

## BioSure PROFESSIONAL



BioSure Clean Ice Ozone System  
HS-5767

Model	Description	Overall Dimensions W x D x H
HS-5767	Bio <sub>3</sub> Sure Clean Ice Ozone System. Includes Head and Standard Cartridge Assembly	4.6" x 2.9" x 5.8"
HS-5768	Bio <sub>3</sub> Sure Clean Ice Ozone Replacement Standard Cartridge	6-12 months Lifetime
HS-5769	Bio <sub>3</sub> Sure Clean Ice Ozone Replacement Large Cartridge	18-36 months Lifetime
HS-5797	Professional Ozone Spray Bottle	10" (255 mm) Height 2.1" (53 mm) Diameter

- Nitrogen-free pure ozone prevents biofilm and bacteria buildup, without chemicals or corrosion.
- Reduces the risk of foodborne illness, downtime, and labor for routine cleanings.
- Operator-replaceable, twist-on electrolytic (EOG) cartridge.
- Scale-prevention feature to prevent scale buildup on electrodes ensures optimal performance.



HS-5768



HS-5797



HS-5769


## Remote Monitoring System

For use on Hoshizaki KM Cuber ice machines

Model Number	For use with	Shipping Length	Shipping Width	Shipping Height	Shipping Weight	List F.O.B. Griffin
HS-5562	KM Cuber ice machines Not for use with KMD-410	8"	8"	3"	1 lb.	\$910
HS-5602	Flaker, Cubelet and DCM Series ice machines**	12"	12"	4"	2 lb.	\$1,250



- Performance dashboard for status, historical data
- Remotely diagnose machines
- Alert notification by email or text
- Control functions: ON/OFF, Reset, Lock-down



DEVICES



SECURE CLOUD SERVER



CELLULAR CONNECTIVITY



SMART GATEWAY



# REACH-INS

REFRIGERATORS / FREEZERS / PREP TABLES  
HOT HOLDING / BACK BAR



Hoshizaki Steelheart® Reach-Ins are engineered to meet the tough demands of commercial kitchens. Steelheart® reach-ins offer rugged, stainless steel construction inside and out for the highest quality, durability, performance and sanitation.



See all  
Reach-In  
models



# BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it.

It's performing beyond expectations... with relentless durability and sustainability.

It's knowing that we've already thought about your future and can perform at the next level.

# UPRIGHT | REFRIGERATORS


## Solid Doors

Unique ducted air distribution system, maintains uniform cabinet temperatures even when full



R1A-FS(L)★ R1A-HS(L)★ R2A-FS R2A-HS R3A-FS

- Energy efficient thermostatic expansion valve for faster temperature recovery
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks.
- Stainless steel interior and exterior front, sides and top
- 4" Heavy duty stem casters standard, 2 with brakes.

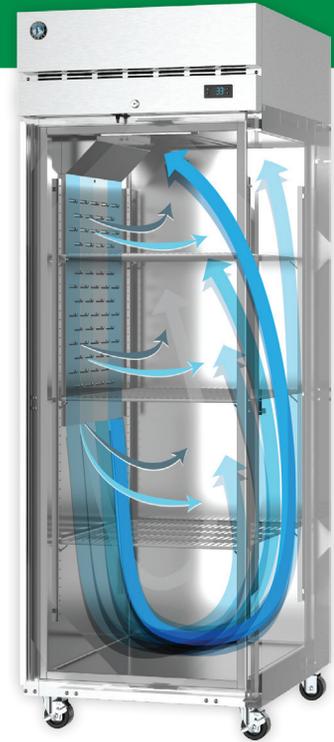

Model Number	R1A-FS★ (L) - Left hinge	R1A-HS★ (L) - Left hinge	R2A-FS	R2A-FSN	R2A-HS	R3A-FS	R3A-HS
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	47.11 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	52" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	57.75"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	20.25"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	19.75" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6 x 22.9"	21.25" x 26" (C) 6 x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562	562 lbs.	811 lbs.	811 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.25	1.25	3.47	2.85	3.47	4.39	4.39
Heat Rejection (BTU / hr)*	317	317	513	621	513	703	703
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$11,200</b> **\$11,190	<b>\$12,710</b>	<b>\$14,910</b>	<b>\$14,910</b>	<b>\$17,690</b>	<b>\$25,450</b>	<b>\$29,000</b>

\*Based on 100°F ambient cycling at set point



# UPRIGHT | REFRIGERATORS

## Glass Doors



- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi-pane, argon filled
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Center shelves for added storage capacity

Model Number	R1A-FG	R1A-HG	R2A-FG	R2A-HG	R3A-FG ★	R3A-HG ★
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	57"	57"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	350 lbs.	350 lbs.	570 lbs.	570 lbs.	826 lbs.	826 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.47	2.47	5.05	5.05	6.5	6.5
Heat Rejection (BTU / hr)*	639	639	978	978	1255	1255
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$13,240</b>	<b>\$15,610</b>	<b>\$18,630</b>	<b>\$20,990</b>	<b>\$33,560</b>	<b>\$37,340</b>

\*Based on 100°F ambient cycling at set point



[CLICK HERE - ACCESSORIES](#)

# UPRIGHT | FREEZERS

## Solid Doors



F1A-FS(L)

F1A-HS(L)

F2A-FS

F2A-FSN

F2A-HS

F3A-FS

F3A-HS

- Stainless steel interior and exterior front, sides and top
- Energy efficient thermostatic expansion valve
- 4" Heavy duty stem casters standard
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- Unique ducted air distribution system, maintains uniform cabinet temperatures even when full

Model Number	F1A-FS (L) - Left hinge	F1A-HS (L) - Left hinge	F2A-FS	F2A-FSN	F2A-HS	F3A-FS	F3A-HS
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	47.11 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	52" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	57.75"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	20.25"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	6	9	9
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	19.75" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	562 lbs.	830 lbs.	830 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230V/60/1	230V/60/1
Amperage (AMP)	8.46	8.46	8.7	9.5	8.7	11	11
HACR Breaker (AMP)	15	15	15	15	15	20	20
Energy Consumption (kWh / day) ASHRAE	6.25	6.25	12.16	11.61	12.16	17.02	17.02
Heat Rejection (BTU / hr)*	1178	1178	1820	2184	1820	1643	1643
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$13,300</b> ** <b>\$13,300</b>	<b>\$14,360</b>	<b>\$18,670</b>	<b>\$20,060</b>	<b>\$20,500</b>	<b>\$27,700</b>	<b>\$30,590</b>

\*Based on 100°F ambient cycling at set point



# UPRIGHT | FREEZERS & DUAL-TEMPS

## Glass Doors



- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient vertical LED lights
- Unique ducted air distribution system, maintains uniform cabinet temperatures
- Dual temperature cabinets for space efficiency
- 4" Heavy duty stem casters standard

Model Number	F1A-FG	F1A-HG	F2A-FG	F2A-HG	DT1A-HS	DT2A-FS
Interior Storage Capacity (AHAM) Refrigerator Freezer	23.10 ft³	23.10 ft³	50.37 ft³	50.37 ft³	10.19 ft³ 10.19 ft³	23.10 ft³ 23.10 ft³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	27.5" x 35" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	61.75"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	27.75" each	59.25"
Adjustable Shelves	3	3	6	6	3	3
Center Shelves (C)	N/A	N/A	3	3	N/A	N/A
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	(L/R) 21.25" x 26" (C) 6" x 17.8"	(L/R) 21.25" x 26" (C) 6" x 17.8"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	365 lbs.	365 lbs.	602 lbs.	602 lbs.	415 lbs.	634 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	8.5	8.5	9.1	9.1	5.5	14
HACR Breaker (AMP)	15	15	15	15	15	20
Energy Consumption (kWh / day) ASHRAE	7.73	7.73	16.3	16.3	4.49	8.59
Heat Rejection (BTU / hr)*	806	806	1694	1694	168   439	376   1401
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104-126
Ambient Temp. Range	45° - 80°F	45° - 100°F	45° - 80°F	45° - 100°F	45° - 100°F	45° to 100°F
Control Set Point Range Refrigerator Freezer	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	33° to 52°F - 10° to 10°F	33° to 52°F - 10° to 10°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$16,790</b>	<b>\$18,760</b>	<b>\$24,070</b>	<b>\$27,560</b>	<b>\$22,780</b>	<b>\$29,850</b>

\*Based on 100°F ambient cycling at set point

[CLICK HERE - ACCESSORIES](#)



# UPRIGHT | PASS-THRU REFRIGERATORS

## Stainless and Glass Doors



**PT1A-FS-FS** ★  
(Shown with door open)



**PT1A-HS-HS** ★



**PT1A-FG-FG**



**PT2A-HS-HS**



**PT2A-FG-FG**

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient LED lights
- Unique ducted air distribution system, maintains uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes
- Glass and solid door configurations can be customized

Model Number	PT1A-FS-FS ★	PT1A-HS-HS ★	PT1A-FG-FG	PT2A-FS-FS	PT2A-HS-HS	PT2A-FG-FG
Interior Storage Capacity (AHAM)	24.20 ft <sup>3</sup>	24.20 ft <sup>3</sup>	24.20 ft <sup>3</sup>	52.50 ft <sup>3</sup>	52.50 ft <sup>3</sup>	52.50 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	27.5" x 37.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 37.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	82.5"	87.25"	87.25"	82.5"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"
Adjustable Shelves	3	3	3	6	6	6
Center Shelves (C)	N/A	N/A	N/A	3	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.75" x 30.75"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"
Crated Shipping Weight	357 lbs	357 lbs	367 lbs.	592 lbs	592 lbs	681 lbs.
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	41.25" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"	58" x 41.25" x 81"
Voltage	115/60/1	115/60/1	115V/60/1	115/60/1	115/60/1	115V/60/1
Amperage (AMP)	5	5	5	8	8	8
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.31	1.31	2.68	3.24	3.24	6
Heat Rejection (BTU / hr)*	348	348	653	581	581	1429
Voltage Range	104-126	104-126	104 - 126	104-126	104-126	104 - 126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° - 100°F	45° to 100°F	45° to 100°F	45° - 100°F
Control Set Point Range	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$17,030</b>	<b>\$19,570</b>	<b>\$20,320</b>	<b>\$23,580</b>	<b>\$27,810</b>	<b>\$29,620</b>

\*Based on 100°F ambient cycling at set point



# UPRIGHT | ROLL-THRU / ROLL-IN

## Solid Doors

Hoshizaki's roll-in and roll-thru refrigerators are built for demanding commercial kitchens that rely on speed and organization. Roll-in models allow full racks to be quickly loaded from one side, while roll-thru designs provide front and back access, streamlining movement between prep and service areas.



**RN1A-FS / RT1A-FS-FS**



**RT1A-FS-FS**



**RN2A-FS / RT2A-FS-FS**

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains uniform cabinet temperatures
- Reinforced stainless steel ramp and floor accommodate Roll-In racks up to 72" tall (supplied by others)
- Made to order

Model Number	RN1A-FS	RT1A-FS-FS	RN2A-FS	RT2A-FS-FS
Interior Storage Capacity (AHAM)	38.13 ft <sup>3</sup>	38.13 ft <sup>3</sup>	78.35 ft <sup>3</sup>	78.35 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	35" x 38.9" x 87.5"	35" x 45.5" x 87.5"	68" x 38.9" x 87.5"	68" x 45.5" x 87.5"
Depth with Doors Open at 90°	65.25"	98.5"	65.25"	98.5"
Interior Door Opening Width	29.25"	29.25"	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"	72.75"	72.75"
Crated Shipping Weight	429 lbs	459 lbs	676 lbs	737 lbs
Crated Shipping Dimensions (L x W x H)	40.5" x 39" x 93.5"	40.5" x 39" x 93.5"	72" x 40.5" x 93.75"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6.4	6.4	8.2	8.2
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	3.186	5.06	5.06
Heat Rejection (BTU / hr)*	774	774	1376	1376
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$17,670</b>	<b>\$22,740</b>	<b>\$25,570</b>	<b>\$32,910</b>

\*Based on 100°F ambient cycling at set point



# UPRIGHT | HEATED CABINETS

## Solid Doors



**HC1A-FS**★

(Shown with top and door open)



**HC1A-HS**★



**HC2A-FS**★



**HC2A-HS**★

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2-section) sheet pans
- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FS ★	HC1A-HS ★	HC2A-FS ★	HC2A-HS ★
Interior Storage Capacity (AHAM)	22.70 ft <sup>3</sup>	22.62 ft <sup>3</sup>	49.70 ft <sup>3</sup>	49.50 ft <sup>3</sup>
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	27.75"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	340 lbs	340 lbs	578 lbs	578 lbs
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP) (W) ASTM 2140-11	15	15	20	20
Energy Consumption (w) ASTM 2140-11	N/A	N/A	N/A	N/A
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F
List F.O.B. Griffin	<b>\$12,160</b>	<b>\$12,580</b>	<b>\$17,850</b>	<b>\$18,960</b>

# UPRIGHT | HEATED CABINETS & PASS-THRUS

## Solid Doors



**HC1A-FS-FS★**  
(Shown with top and doors open)



**HC1A-HS-HS★**



**HC2A-FS-FS★**



**HC2A-HS-HS★**

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2 section) sheet pans
- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FS-FS ★	HC1A-HS-HS ★	HC2A-FS-FS ★	HC2A-HS-HS ★
Interior Storage Capacity (AHAM)	23.82 ft <sup>3</sup>	23.68 ft <sup>3</sup>	52.40 ft <sup>3</sup>	52.10 ft <sup>3</sup>
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"
Crated Shipping Weight	367 lbs	367 lbs	625 lbs	625 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP)	15	15	20	20
Energy Consumption (w) ASTM 2140-11	N/A	N/A	N/A	N/A
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F
List F.O.B. Griffin	<b>\$17,340</b>	<b>\$17,770</b>	<b>\$24,910</b>	<b>\$26,010</b>



[CLICK HERE - ACCESSORIES](#)

Intertek

Intertek

ENERGY STAR

# UPRIGHT | HEATED CABINETS

## Glass Doors



HC1A-FGE ★



HC1A-HGE ★



HC2A-FGE ★



HC2A-HGE ★

(Shown with top and door open)

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2-section) sheet pans
- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FGE ★	HC1A-HGE ★	HC2A-FGE ★	HC2A-HGE ★
Interior Storage Capacity (AHAM)	22.70 ft <sup>3</sup>	22.62 ft <sup>3</sup>	49.70 ft <sup>3</sup>	49.50 ft <sup>3</sup>
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	27.75"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	340 lbs	340 lbs	578 lbs	578 lbs
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP) (W) ASTM 2140-11	15	15	20	20
Energy Consumption (w) ASTM 2140-11	175.5	175.5	240.80	240.80
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F
List F.O.B. Griffin	<b>\$16,100</b>	<b>\$16,900</b>	<b>\$24,200</b>	<b>\$25,800</b>

# UPRIGHT | HEATED CABINETS & PASS-THRUS

## Glass Doors



**HC1A-FGE-FGE** ★  
(Shown with top and doors open)



**HC1A-HGE-HGE** ★



**HC2A-FGE-FGE** ★



**HC2A-HGE-HGE** ★

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2 section) sheet pans

- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FGE-FGE ★	HC1A-HGE-HGE ★	HC2A-FGE-FGE ★	HC2A-HGE-HGE ★
Interior Storage Capacity (AHAM)	23.82 ft <sup>3</sup>	23.68 ft <sup>3</sup>	52.40 ft <sup>3</sup>	52.10 ft <sup>3</sup>
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"
Crated Shipping Weight	367 lbs	367 lbs	625 lbs	625 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) / 10 (230v)	9 (208v) / 10 (230v)
HACR Breaker (AMP)	15	15	20	20
Energy Consumption (w) ASTM 2140-11	161.40	161.40	305.40	305.40
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F
List F.O.B. Griffin	<b>\$18,790</b>	<b>\$20,830</b>	<b>\$27,630</b>	<b>\$29,330</b>



[CLICK HERE - ACCESSORIES](#)

Intertek

Intertek

ENERGY STAR



# STEELHEART® UNDERCOUNTER & WORKTOP REFRIGERATION

## YOUR HEIGHT, YOUR CHOICE

Hoshizaki Undercounters come in three worksurface heights to meet the needs of your busy operation.



- Standard Height 36" work surfaces with 6" casters are the most commonly found units in operations, allowing the user to work on the top of the cabinet when needed.
- ADA-Compliant 34" work surfaces with 4" casters meet ADA-Compliance for work surfaces and cabinet access.
- Low Profile 32" work surfaces with 2.25" casters are made to slide right under existing ADA-compliant counters with plenty of room for air circulation to ensure optimal performance.



Scan to  
View  
Undercounter  
Models



# UNDERCOUNTER | REFRIGERATORS

## Solid Doors

34" WORK HEIGHT W/ 4" CASTERS



UR27B(-01)★



UR36B(-01)★



UR48B(-01)★



UR60B(-01)★



UR72B(-01)★

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Optional 2.25" casters for ADA Compliance 

- Field reversible doors

- Electronic controls

Model Number	UR27B ★ UR27B-01 ** (01 Cylinder Door Lock)	UR36B ★ UR36B-01 ** (01 Cylinder Door Lock)	UR48B ★ UR48B-01 ** (01 Cylinder Door Lock)	UR60B ★ UR60B-01 ** (01 Cylinder Door Lock)	UR72B ★ UR72B-01 ** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	36" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	25.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	173 lbs.	204 lbs.	249 lbs.	290 lbs.	339 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	40.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)*	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F				
Temperature Range	32° - 52°F				
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$6,470</b> ** <b>\$6,570</b>	<b>\$8,700</b> ** <b>\$8,830</b>	<b>\$9,470</b> ** <b>\$9,670</b>	<b>\$10,670</b> ** <b>\$10,870</b>	<b>\$12,250</b> ** <b>\$12,450</b>

\*Based on 100°F ambient cycling at set point

\*\*MADE TO ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.



[CLICK HERE - ACCESSORIES](#)

Intertek

Intertek

ENERGY STAR

# UNDERCOUNTER | REFRIGERATORS

## Drawer/Door Combination

34" WORK HEIGHT W/ 4" CASTERS



UR48B-D2



UR60B-D2

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	UR48B-D2**	UR60B-D2**
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (L x W x H)	48" x 30" x 33.75" (including 4" casters)	60" x 30" x 33.75" (including 4" casters)
Depth With Door Open At 90°	52.5"	58.5"
Depth With Drawer Fully Open	52"	52"
Door Opening Width x Height	19.5" x 23"	25.5" x 23"
Shelves (#) / Dimensions(W x D)	(1) / 21.5" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	12" x 20" x 6" deep (1) full size pan, 6" deep
Crated Shipping Weight	282 lbs.	292 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) NSF	1.05	1.75
Heat Rejection (BTU / hr)	278	249
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$11,790</b>	<b>\$13,370</b>

\*\*MADE TO ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.

# UNDERCOUNTER | REFRIGERATORS

## Drawers

34" WORK HEIGHT W/ 4" CASTERS



UR27B-D2



UR48B-D4



UR60B-D4



UR72B-D6

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard
- Optional 2.25" casters for ADA Compliance 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Enamel coated evaporator coil

Model Number	UR27B-D2	UR48B-D4	UR60B-D4	UR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.27 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	203 lbs.	314 lbs.	346 lbs.	443 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$9,650</b>	<b>\$14,300</b>	<b>\$16,000</b>	<b>\$21,250</b>



[CLICK HERE - ACCESSORIES](#)

# UNDERCOUNTER | FREEZERS

## Solid Doors

34" WORK HEIGHT W/ 4" CASTERS



UF27B(-01)



UF48B(-01)



UF60B(-01)★

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Optional 2.25" casters for ADA Compliance 
- Field reversible doors
- Enamel coated evaporator coil

Model Number	UF27B UF27B-01** (01 Cylinder Door Lock)	UF48B UF48B-01** (01 Cylinder Door Lock)	UF60B★ UF60B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.5" x 16"	27.25" x 16"
Crated Shipping Weight	175 lbs.	258 lbs.	310 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	3.6	4
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	756	727
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$7,580</b> **\$7,660	<b>\$10,650</b> **\$10,850	<b>\$12,990</b> **\$13,190

\*\*MADE TO ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.



# UNDERCOUNTER | FREEZERS

## Drawers

34" WORK HEIGHT W/ 4" CASTERS



UF27B-D2



UF48B-D4



UF48B-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Optional 2.25" casters for ADA Compliance 
- Field reversible doors
- Enamel coated evaporator coil

Model Number	UF27B-D2	UF48B-D2	UF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"	48" x 30" x 33.75"
Depth with Doors Open at 90°A	N/A	N/A	N/A
Interior Door Opening Width	N/A	N/A	N/A
Depth with Drawer Fully Open	52"	52"	52"
Interior Door Opening Height	N/A	23"	N/A
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 size, 6" deep	(1) 1/2 size and (1) 1/3 size, 6" deep
Adjustable Shelves	N/A	1 / 21.5" x 16"	N/A
Shelf Dimensions (W x D)	N/A	N/A	N/A
Crated Shipping Weight	207 lbs.	295 lbs.	331 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"	52.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	4	4
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.40	3.60	3.60
Heat Rejection (BTU / hr)	489	756	756
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$10,080</b>	<b>\$13,060</b>	<b>\$15,520</b>



[CLICK HERE - ACCESSORIES](#)



# SIDEMOUNT REFRIGERATOR UNDERCOUNTERS AND WORKTOPS

## MORE SPACE INSIDE AND OUT

The space saving design places the condenser on the side of the unit creating a front-breathing air flow which means more space inside and out for your operation to flow.

Requires a back wall clearance of just 1" and is shallower compared to rear mount units giving your operation more room to move.



- Hoshizaki's signature air flow movement circulates cold air top to bottom to surround food with uniform cool temperatures.
- More usable interior space, (fits full size pans in top and bottom shelves and drawers).
- Insulated with 2" CFC free, foamed in place polyurethane for superior cooling, temperature maintenance and reduced energy usage.
- Energy efficient hot gas condensate removal is standard.
- Stainless steel exterior and interior for superior durability.



Scan to  
View  
Sidemount  
Models



# UNDERCOUNTERS | SIDEMOUNTS

## Refrigerators and Freezers with Doors

34" WORK HEIGHT W/ 4" CASTERS



ULR46B ★



ULR60B ★



ULR67B ★



ULR93B ★

- Front breathing air flow design allows for just 1" of rear wall clearance
- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard

Model Number	ULR46B ★	ULR60B ★	ULR67B ★	ULR93B ★	ULF46B	ULF60B	ULF67B
Interior Storage Capacity (AHAM)	11.78 ft <sup>3</sup>	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>	30.17 ft <sup>3</sup>	11.78 ft <sup>3</sup>	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>
Overall Dimensions *(W x D x H including 4" casters)	46" x 33.25" x 33.875"*	60" x 33.25" x 33.875"*	67" x 33.25" x 33.875"*	93" x 33.25" x 33.875"*	46" x 33.25" x 33.875"*	60" x 33.25" x 33.875"*	67" x 33.25" x 33.875"*
Depth with Doors Open at 90°	60.5"	54.75"	57.75"	57.75"	60.5"	54.75"	57.75"
Interior Door Opening Width	25.5"	19.5"	22.5"	22.5"	22.5"	19.5"	22.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	4	4	4	2	4	4
Shelf Dimensions (W x D)	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"	24.75" x 25.5"	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"
Crated Shipping Weight	263 lbs.	322 lbs.	345 lbs.	455 lbs.	263 lbs.	322 lbs.	345 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 36"	63.75" x 35.75" x 36"	70.75" x 35.75" x 36"	95.25" x 34.5" x 36"	48.75" x 34.75" x 36"	63.75" x 35.75" x 36"	70.75" x 35.75" x 36"
Voltage	115V/60/1						
Amperage (AMP)	3	3	3	5	4	5	5
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.92	1.26	1.33	1.87	3.36	4.50	4.49
Heat Rejection (BTU / hr)	333	312	341	448	645	786	851
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F						
Control Setpoint Range	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F	-10 to 10°F	-10 to 10°F	-10 to 10°F
Refrigerant	R290						
List F.O.B. Griffin	<b>\$10,820</b>	<b>\$12,000</b>	<b>\$14,010</b>	<b>\$17,820</b>	<b>\$15,660</b>	<b>\$16,690</b>	<b>\$17,720</b>



[CLICK HERE - ACCESSORIES](#)

# UNDERCOUNTERS | SIDEMOUNTS

## Refrigerator Drawer/Door Combinations

34" WORK HEIGHT W/ 4" CASTERS



ULR60B-D2



ULR67B-D2



ULR93B-D2



ULR93B-D4

- Front breathing air flow design allows for just 1" of rear wall clearance
- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard

Model Number	ULR60B-D2	ULR67B-D2	ULR93B-D2	ULR93B-D4
Interior Storage Capacity (AHAM)	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>	30.17 ft <sup>3</sup>	30.17 ft <sup>3</sup>
Overall Dimensions *(L x W x H including 4" casters)	60" x 33.25" x 33.875"*	67" x 33.25" x 33.875"*	93" x 33.25" x 33.875"*	93" x 33.25" x 33.875"*
Depth with Door Fully Open (including 1" bumper)	54.75"	54.75"	57.75"	57.75"
Depth With Drawer Fully Open	57.5"	57.5"	57.5"	57.5"
Door/Drawer Opening Width x Height	19.5" x 23"(door) / 19.5" x 9" (drawer)	22.5" x 23"(door) / 19.5" x 9" (drawer)	22.5" x 23"(door) / 19.5" x 9" (drawer)	22.5" x 23"(door) / 19.5" x 9" (drawer)
Shelves (#) / Dimensions(W x D)	2 / 21.5" x 25.5"	2 / 24.5" x 25.5"	4 / 24.5" x 25.5"	4 / 24.5" x 25.5"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) ¼ size, 6" deep pans	(2) 12 x 20 x 6" deep pans	(2) 12 x 20 x 6" deep pans	(2) 12 x 20 x 6" deep pans
Crated Shipping Weight	363 lbs.	404 lbs.	500 lbs.	545 lbs.
Crated Shipping Dimensions (L x W x H)	63.75" x 35.75" x 36"	70.75" x 35.75" x 36"	95.25" x 34.5" x 36"	95.25" x 34.5" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	5	5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.272	1.320	1.879	1.879
Heat Rejection (BTU / hr)	305	414	448	448
Voltage Range	104 - 126	104-126	104-126	104-126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Setpoint Range	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$14,760</b>	<b>\$18,420</b>	<b>\$22,020</b>	<b>\$26,220</b>

# UNDERCOUNTERS | SIDEMOUNTS

## Refrigerators with Drawers

34" WORK HEIGHT W/ 4" CASTERS



ULR46B-D2



ULR60B-D4



ULR67B-D4



ULR93B-D6

- Front breathing air flow design allows for just 1" of rear wall clearance
- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard

Model Number	ULR46B-D2	ULR60B-D4	ULR67B-D4	ULR93B-D6
Interior Storage Capacity (AHAM)	11.78 ft <sup>3</sup>	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>	30.17 ft <sup>3</sup>
Overall Dimensions *(W x D x H including 4" casters)	46" x 33.25" x 33.875"*	60" x 33.25" x 33.875"*	67" x 33.25" x 33.875"*	93" x 33.25" x 33.875"
Depth with Drawer Fully Open	57.5"	57.5"	57.5"	57.5"
Drawer Pan Capacity (pans by others)	(2) 12 x 20" full size, 6" deep pans	(2) 12 x 10" half size pans and (2) 12 x 6.5" 1/3 size pans, 6" deep pans	22.5"	(2) 12 x 20" full size, 6" deep pans
Crated Shipping Weight	313 lbs.	408 lbs.	443 lbs.	589 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 36"	63.75" x 35.75" x 36"	70.75" x 35.75" x 36"	95.25" x 34.5" x 36"
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	3	3	3	5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.92	1.26	1.33	1.87
Heat Rejection (BTU / hr)	333	305	381	576
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Temperature Range	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$13,640</b>	<b>\$17,510</b>	<b>\$21,760</b>	<b>\$30,420</b>



# UNDERCOUNTER | LOW-PROFILE

## Refrigerator Solid Doors

32" WORK HEIGHT W/ 2.25" CASTERS



UR27B-LP(-01)★



UR48B-LP★

- Specifically designed to fit under an ADA compliant 34" work surface height counter 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Stainless steel exterior front, sides and top with stainless steel interior sides, back, and floor
- Innovative air distribution system distributes air evenly

Model Number	UR27B-LP★ UR27B-LP-01* (01 Cylinder Door Lock)	UR36B-LP★ UR36B-LP-01* (01 Cylinder Door Lock)	UR48B-LP★ UR48B-LP-01* (01 Cylinder Door Lock)	UR60B-LP★ UR60B-LP-01* (01 Cylinder Door Lock)	UR72B-LP★ UR72B-LP-01* (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions W x D x H including (2.25" casters)	27" x 30" x 31.9"	36" x 30" x 31.9"	48" x 30" x 31.9"	60" x 30" x 31.9"	72" x 30" x 31.9"
Depth with Doors Open at 90°	54.5"	57.5"	51.5"	57.5"	51.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	27.25"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	2	6	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	173 lbs.	204 lbs.	249 lbs.	290 lbs.	339 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 35.5"	40.5" x 34" x 35.5"	52.5" x 34" x 35.5"	62.5" x 34" x 35.5"	73.75" x 32" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	1.05	0.94	1.12
Heat Rejection (BTU / hr)	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F				
Control Setpoint Range	32° - 52°F				
Refrigerant	R290	R290	R290	R290	R290

\*MADE TO ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.



# UNDERCOUNTER | LOW-PROFILE

## Refrigerator Drawer/Door Combinations

32" WORK HEIGHT W/ 2.25" CASTERS



UR48B-LPD4



UR60B-LPD2

- Specifically designed to fit under an ADA compliant 34" work surface height counter 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Stainless steel exterior front, sides and top with stainless steel interior sides, back, and floor
- Innovative air distribution system distributes air evenly

Model Number	UR27B-LPD2	UR48B-LPD2	UR48B-LPD4	UR60B-LPD2	UR60B-LPD4	UR72B-LPD6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions W x D x H including (2.25" casters)	27" x 30" x 31.9"	48" x 30" x 31.9"	48" x 30" x 31.9"	60" x 30" x 31.9"	60" x 30" x 31.9"	72" x 30" x 31.9"
Depth With Drawer Fully Open	51"	51"	51"	51"	51"	51"
Drawer Opening Width x Height	22.75" x 23"	19.5" x 23"	19.5" x 23"	25.5" x 23"	25.5" x 23"	19.5" x 23"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan & (2) ¼ size pans	(1) ½ size pan & (1) 1/3 size pan	(1) ½ size pan & (1) 1/3 size pan	(1) ½ size pan & (1) 1/3 size pan	(1) 12 x 20 full size pan & (2) ¼ size pans	(1) ½ size pan & (1) 1/3 size pan
Crated Shipping Weight	203 lbs.	282 lbs.	314 lbs.	292 lbs.	346 lbs.	443 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 35.5"	52.5" x 34" x 35.5"	52.5" x 34" x 35.5"	62.5" x 34" x 35.5"	62.5" x 34" x 35.5"	73.75" x 32" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3	3	3
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	0.65	1.05	1.05	0.94	0.94	1.12
Heat Rejection (BTU / hr)	152	278	278	249	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Setpoint Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290



# UNDERCOUNTER | LOW-PROFILE

## Freezers Drawers and Doors

32" WORK HEIGHT W/ 2.25" CASTERS



- Specifically designed to fit under an ADA compliant 34" work surface height counter 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Stainless steel exterior front, sides and top with stainless steel interior sides, back, and floor
- Innovative air distribution system distributes air evenly

Model Number	UF27B-LP UF27B-LP-01 (01 Cylinder Door Lock)	UF48B-LP UF48B-LP01 (01 Cylinder Door Lock)	UF60B-LP UF60B-LP-01 (01 Cylinder Door Lock)	UF27B-LPD2	UF48B-LPD2	UF48B-LPD4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions W x D x H including (2.25" casters)	N/A	N/A	N/A	27" x 30" x 31.9"	48" x 30" x 31.9"	48" x 30" x 31.9"
Depth With Drawer Fully Open	N/A	N/A	N/A	51"	51.5"	51"
Drawer Opening Width x Height	N/A	N/A	N/A	22.75" x 23"	19.5" x 23"	19.5" x 23"
Drawer Pan Capacity (pans by others)	N/A	N/A	N/A	(1) 12 x 20 full size pan and (2) 1/4 size pans	(1) 1/2 size pan & (1) 1/3 size pan	(1) 1/2 size pan & (1) 1/3 size pan
Crated Shipping Weight	175 lbs.	258 lbs.	310 lbs.	207 lbs.	295 lbs.	331 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 35.5"	52.5" x 34" x 35.5"	62.5" x 34" x 35.5"	34" x 31.5" x 35.5"	52.5" x 34" x 35.5"	52.5" x 34" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	2.4	3.6	4	3	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	2.4	3.6	3.95	2.4	3.6	3.6
Heat Rejection (BTU / hr)	509	756	727	489	756	756
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Setpoint Range	-10° to 10°F	-18° to 10°F	-18° to 10°F	-12° to 11°F	-18° to 10°F	-12° to 11°F
Refrigerant	R290	R290	R290	R290	R290	R290



# UNDERCOUNTER | LOW-PROFILE

## Glass Door Refrigerators and Freezer 32" WORK HEIGHT W/ 2.25" CASTERS



UR27B-GLP01 ★



UR48B-GLP01 ★



UF27B-GLP01

- Stainless steel interior and exterior front, sides and top
- Energy efficient LED interior lights with on/off switch
- Standard 2.25" casters (2 with brakes)
- Meets ADA requirements 
- Glass doors with locks are energy efficient multi pane, argon filled
- Field reversible glass doors

Model Number	UR27B-GLP01 ★	UR48B-GLP01 ★	UF27B-GLP01
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	6.21 ft <sup>3</sup>
Overall Dimensions W x D x H including (2.25" casters)	27" x 31" x 32"	48" x 31" x 32"	27" x 31" x 32"
Depth with Doors Open at 90°	55.5"	52"	55.5"
Interior Door Opening Width	22.75"	19.5"	22.75"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	1
Shelf Dimensions (W x D)	22" x 16"	21.5" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	249 lbs.	189 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 35.5"	52.5" x 34" x 36.5"	36" x 31.5" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.15	1.46	4.32
Heat Rejection (BTU / hr)	263	432	468
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 80°F
Temperature Range	32° - 52°F	32° - 52°F	-10° - 10°F
Refrigerant	R290	R290	R290





# STEELHEART® WORKTOPS AT THE READY.



STANDALONE UNITS WITH A 4" BACK EDGE TO PREVENT SPILLS AND CONTAIN SUPPLIES.

Hoshizaki's worktop refrigerators and freezers combine cold storage with a built-in prep surface, delivering reliable cooling and space-saving efficiency for busy commercial kitchens and bars.



Scan to  
View  
Worktop  
Models



# WORKTOPS | REFRIGERATORS

## Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



WR27B(-01)\*



WR36B(-01)\*



WR48B(-01)\*



WR60B(-01)\*



WR72B(-01)\*

- Stainless steel interior and exterior front, sides and top
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed in place polyurethane

- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	WR27B ★ WR27B-01* (01 Cylinder Door Lock)	WR36B ★ WR36B-01* (01 Cylinder Door Lock)	WR48B ★ WR48B-01* (01 Cylinder Door Lock)	WR60B ★ WR60B-01* (01 Cylinder Door Lock)	WR72B ★ WR72B-01* (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	36" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width x Height	22.75" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	216 lbs.	264 lbs.	302 lbs.	350 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	40.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F				
Temperature Range	32° - 52°F				
Refrigerant	R290	R290	R290	R290	R290

\*MADE TO ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.



[CLICK HERE - ACCESSORIES](#)

Intertek

Intertek

ENERGY STAR

# WORKTOP | REFRIGERATORS

## Drawer/Door Combination

36" WORK HEIGHT W/ 6" CASTERS



WR48B-D2



WR60B-D2

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	WR48B-D2	WR60B-D2
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (L x W x H)	48" x 30" x 40" (including 6" casters)	60" x 30" x 40" (including 6" casters)
Depth With Door Open At 90°	52.5"	58.5"
Depth With Drawer Fully Open	52.5"	52"
Door Opening Width x Height	19.5" x 23"	25.5" x 23"
Shelves (#) / Dimensions (W x D)	(1) / 21.5" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	12" x 20" x 6" deep (1) full size pan, 6" deep
Crated Shipping Weight	295 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) NSF	1.05	1.75
Heat Rejection (BTU / hr)	278	249
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$12,700</b>	<b>\$13,910</b>



# WORKTOP | REFRIGERATORS

## Drawers

36" WORK HEIGHT W/ 6" CASTERS



- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

Model Number	WR27B-D2	WR48B-D4	WR60B-D4	WR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	214 lbs.	332 lbs.	381 lbs.	460 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$9,860</b>	<b>\$15,400</b>	<b>\$16,610</b>	<b>\$21,410</b>

# WORKTOP | FREEZERS

## Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



WF27B(-01)



WF48B(-01)



WF60B(-01)★

- Stainless steel interior and exterior front, sides and top
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Electronic controls
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	WF27B WF27B-01* (01 Cylinder Door Lock)	WF48B WF48B-01* (01 Cylinder Door Lock)	WF60B ★ WF60B-01* (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	7.21 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	185 lbs.	285 lbs.	320 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	51" x 32" x 40.25"	62" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	5.9	5.6
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.64	4.22
Heat Rejection (BTU / hr)	489	656	804.2zz
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$7,920</b> <b>**\$8,030</b>	<b>\$11,210</b> <b>**\$11,410</b>	<b>\$13,500</b> <b>**\$13,700</b>

\*MADE TO ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.



[CLICK HERE - ACCESSORIES](#)

# WORKTOP | FREEZERS

## Drawers

36" WORK HEIGHT W/ 6" CASTERS



WF27B-D2



WF48B-D2



WF48B-D4

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard
- Electronic controls

Model Number	WF27B-D2	WF48B-D2	WF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	48" x 30" x 40"
Depth with Drawer Fully Open	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	218 lbs.	310 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	52.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	4
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60	3.60
Heat Rejection (BTU / hr)	489	756	756
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$10,620</b>	<b>\$13,910</b>	<b>\$16,610</b>

# WORKTOP | SIDEMOUNTS

## Refrigerators & Freezers With Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



WLR46B ★



WLR60B ★



WLR67B ★



WLR93B ★

- Front breathing air flow design allows for just 1" of rear wall clearance
- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Heavy duty field reversible doors
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 6" Stem casters standard

Model Number	WLR46B ★	WLR60B ★	WLR67B ★	WLR93B ★	WLF46B	WLF60B	WLF67B
Interior Storage Capacity (AHAM)	11.78 ft <sup>3</sup>	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>	30.17 ft <sup>3</sup>	11.78 ft <sup>3</sup>	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>
Overall Dimensions *(W x D x H including 6" casters)	46" x 33.25" x 40.25"*	60" x 33.25" x 40.25"*	67" x 33.25" x 40.25"*	93" x 33.25" x 40.25"*	46" x 33.25" x 40.25"*	60" x 33.25" x 40.25"*	67" x 33.25" x 40.25"*
Depth with Doors Open at 90°	60.5"	54.75"	57.75"	57.75"	60.5"	54.75"	57.75"
Interior Door Opening Width	25.5"	19.5"	22.5"	22.5"	25.5"	19.5"	22.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	4	4	6	2	4	4
Shelf Dimensions (W x D)	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"	24.75" x 25.5"	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"
Crated Shipping Weight	278 lbs.	344 lbs.	354 lbs.	478 lbs.	278 lbs.	344 lbs.	354 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 40"	63.75" x 35.75" x 40"	70.75" x 35.75" x 40"	95.25" x 34.5" x 40"	48.75" x 34.75" x 40"	63.75" x 35.75" x 40"	70.75" x 35.75" x 40"
Voltage	115V/60/1	115/60/1	115/60/1	115/60/1v	115V/60/1	115/60/1	115/60/1
Amperage (AMP)	3	3	3	5	4	5	5
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.92	1.26	1.33	1.87	3.36	4.50	4.49
Heat Rejection (BTU / hr)	333	312	341	448	645	786	851
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F						
Control Setpoint Range	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F	-10° to 10°F	-10° to 10°F	-10° to 10°F
Refrigerant	R290						
List F.O.B. Griffin	<b>\$11,950</b>	<b>\$13,530</b>	<b>\$14,520</b>	<b>\$19,570</b>	<b>\$16,480</b>	<b>\$17,510</b>	<b>\$18,850</b>



# WORKTOP | SIDEMOUNTS

## Refrigerator Drawer/Door Combinations

36" WORK HEIGHT W/ 6" CASTERS



WLR46B-D2



WLR67B-D2



WLR67B-D4



WLR93B-D4

- Front breathing air flow design allows for just 1" of rear wall clearance
- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 6" Stem casters standard

Model Number	WLR46B-D2	WLR60B-D2	WLR60B-D4	WLR67B-D2	WLR67B-D4	WLR93B-D2	WLR93B-D4	WLR93B-D6
Interior Storage Capacity (AHAM)	11.78 ft <sup>3</sup>	17.22 ft <sup>3</sup>	17.22 ft <sup>3</sup>	19.97 ft <sup>3</sup>	19.97 ft <sup>3</sup>	30.17 ft <sup>3</sup>	30.17 ft <sup>3</sup>	30.17 ft <sup>3</sup>
Overall Dimensions *(W x D x H including 6" casters)	46" x 33.25" x 40.25"*	60" x 33.25" x 40.25"*	60" x 33.25" x 40.25"*	67" x 33.25" x 40.25"*	67" x 33.25" x 40.25"*	97" x 33.25" x 40.25"*	97" x 33.25" x 40.25"*	93" x 33.25" x 40.25"*
Depth with Drawer Fully Open (including 1" bumper)	57.5"	57.5"	57.5"	57.5"	57.5"	57.5"	57.5"	57.5"
Drawer Pan Capacity (pans by others)	(2) 12 x 20" full size, 6" deep pans	(2) 12 x 10" half size pans and (2) 12 x 6.5" 1/3 size pans, 6" deep pans	(2) 12 x 10" half size pans and (2) 12 x 6.5" 1/3 size pans, 6" deep pans	(2) 12 x 20 x 6" deep pans	(2) 12 x 20" full size, 6" deep pans	(2) 12 x 20 x 6" deep pans	(2) 12 x 20 x 6" deep pans	(2) 12 x 20" full size, 6" deep pans
Crated Shipping Weight	328 lbs.	385 lbs.	430 lbs.	404 lbs.	452 lbs.	523 lbs.	568 lbs.	612 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 40"	63.75" x 35.75" x 40"	63.75" x 35.75" x 40"	70.75" x 35.75" x 40"	70.75" x 35.75" x 40"	95.25" x 34.5" x 40"	95.25" x 34.5" x 40"	95.25" x 34.5" x 40"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3	3	3	3	3
HACR Breaker (AMP)	15	15	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.92	1.26	1.26	1.320	1.33	1.879	1.879	1.87
Heat Rejection (BTU / hr)	333	305	305	414	381	448	448	576
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F	28° to 45°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$14,880</b>	<b>\$16,250</b>	<b>\$19,780</b>	<b>\$17,670</b>	<b>\$20,810</b>	<b>\$23,480</b>	<b>\$27,810</b>	<b>\$31,420</b>



[CLICK HERE - ACCESSORIES](#)

Intertek Intertek



# STEELHEART® PREP TABLES

## WHAT YOU NEED, WHERE YOU NEED IT.



ENGINEERED FOR SUPERIOR COOLING  
ONLY AVAILABLE FROM HOSHIZAKI




Hoshizaki's exclusive design distributes cold air through a system of louvered ducts positioned throughout the cabinet. Constant air movement circulates top to bottom and at each individual shelf to surround food with uniform cool temperatures.

Available in Sandwich Prep and Mega Top Sizes.



Scan to View  
Drawer and Pan  
Configuration  
Guides

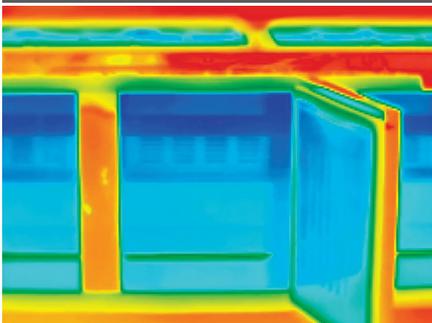

# PREP TABLES | SANDWICH TOPS

## Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



SR27B-8



SR36B-10



SR48B-8



SR48B-12

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors
- Divider Bars Included

Model Number	SR27B-8	SR36B-10	SR48B-8	SR48B-12
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.7 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	36" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	55.5"	57.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	10	8	12
Crated Shipping Weight	202 lbs.	245 lbs.	292 lbs.	301 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 31.5" x 46.5"	40.5" x 32" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.7	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.6	2.38	2.38
Heat Rejection (BTU / hr)	361	364.1	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$8,050</b>	<b>\$10,100</b>	<b>\$10,260</b>	<b>\$11,270</b>

# PREP TABLES | SANDWICH TOPS

## Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



SR60B-8



SR72B-16



SR72B-18

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	SR60B-8	SR60B-12	SR60B-16	SR72B-12	SR72B-16	SR72B-18
Interior Storage Capacity (AHAM)	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 30" x 44.25"	60" x 30" x 44.25"	60" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	3	3	3
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	12	16	12	16	18
Crated Shipping Weight	346 lbs.	348 lbs.	359 lbs.	404 lbs.	406 lbs.	419 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	73.75" x 32" x 46.5"	73.75" x 32" x 46.5"	73.75" x 32" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	5.05	5.05	5.05
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F					
Temperature Range	32° - 52°F					
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$12,140</b>	<b>\$12,410</b>	<b>\$12,240</b>	<b>\$14,310</b>	<b>\$14,500</b>	<b>\$13,540</b>



# PREP TABLES | SANDWICH TOPS

## Drawers

36" WORK HEIGHT W/ 6" CASTERS



SR27B-8D2



SR48B-12D4



SR48B-12D2\*\*

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-8D2	SR48B-12D4	SR48B-12D2
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth With Cutting Board Installed	30.5"	30.5"	30.5"
Depth With Door Open At 90°	N/A	N/A	52.5"
Depth With Drawer Fully Open	52"	52"	52"
Door/Drawer Opening Width	19.5"	19.5"	19.5"
Adjustable Shelves / Shelf Dimensions (WxD)	N/A	N/A	(2) 21.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) ¼ size pans. Bottom drawer will accommodate (1) full size pan.	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pans 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	242 lbs	382 lbs.	355 lbs.
Crated Shipping Dimensions (L x W x H)	32"x 31.5" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	2.83
Heat Rejection (BTU / hr)	361	403	403
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	<b>\$11,380</b>	<b>\$17,270</b>	<b>\$15,200</b>



[CLICK HERE - ACCESSORIES](#)

Intertek Intertek

# PREP TABLES | MEGA TOPS

## Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-12M	SR36B-15M	SR48B-12M	SR48B-18M
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	8.7 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	36" x 34" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Doors Open at 90°	52.5"	58.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	21.2" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	15	12	18
Crated Shipping Weight	217 lbs.	258 lbs.	303 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	40.5" x 36" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	1.82	2.83	2.83
Heat Rejection (BTU / hr)	361	258	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$8,800</b>	<b>\$10,980</b>	<b>\$12,620</b>	<b>\$12,430</b>

# PREP TABLES | MEGA TOPS

## Solid Doors

36" WORK HEIGHT W/ 6" CASTERS



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR60B-12M	SR60B-18M	SR60B-24M	SR72B-18M	SR72B-24M	SR72B-30M
Interior Storage Capacity (AHAM)	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 34" x 44.25"	60" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"
Depth With Doors Open At 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	18	24	18	24	30
Crated Shipping Weight	346 lbs.	368 lbs.	383 lbs.	418 lbs.	435 lbs.	449 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" x 36" x 46"	61.75" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 4.5"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	4.77	4.77	4.77
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$14,170</b>	<b>\$14,400</b>	<b>\$13,990</b>	<b>\$16,390</b>	<b>\$16,660</b>	<b>\$15,900</b>

[CLICK HERE - ACCESSORIES](#)



# PREP TABLES | MEGA TOPS

## Drawer/Door Combinations

36" WORK HEIGHT W/ 6" CASTERS



- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

Model Number	SR48B-18MD2	SR60B-24MD2	SR72B-30MD2	SR72B-30MD4
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Door Open at 90°	52"	58.5"	52.5"	52.5"
Depth With Drawer Fully Open	52.5"	52"	52"	52"
Shelves (#) / Dimensions (WxD)	(2) / 21.25" x 16"	(1) / 27.25" x 16"	(2) / 22" x 16"	(1) / 22" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) full size pan 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	355 lbs.	420 lbs.	475 lbs.	510 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	4	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.83	4.05	5.05	5.05
Heat Rejection (BTU / hr)	403	575	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$16,260</b>	<b>\$20,160</b>	<b>\$22,030</b>	<b>\$24,610</b>



# PREP TABLES | MEGA TOPS

## Drawers

36" WORK HEIGHT W/ 6" CASTERS



SR27B-12MD2

SR48B-18MD4

SR60B-24MD4

SR72B-30MD6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-12MD2	SR48B-18MD4	SR60B-24MD4	SR72B-30MD6
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	12 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	36.5"	36.5"	36.5"	36.5"
Depth With Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	254 lbs.	382 lbs.	457 lbs.	539 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	4.05	5.05
Heat Rejection (BTU / hr)	361	403	575	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	<b>\$13,390</b>	<b>\$19,130</b>	<b>\$22,430</b>	<b>\$27,440</b>



[CLICK HERE - ACCESSORIES](#)

Intertek Intertek



# STEELHEART® FLAT LID PREP TABLES


## FLEXIBILITY ON ALL SIDES.



Steelheart® Flat Lid Prep Tables are an excellent choice for providing ingredient access in flexible workspaces, especially in operations where ingredients need to be accessed from both sides.

Just like standard pivot-top prep tables, Hoshizaki's exclusive design distributes cold air through a system of louvered ducts positioned throughout the cabinet. Constant air movement circulates top to bottom and at each individual shelf to surround food with uniform cool temperatures.

Available in Sandwich Prep and Mega Top Sizes.

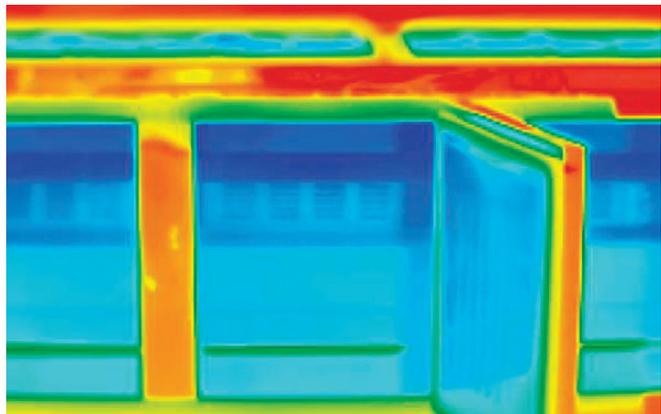

Scan to View Drawer and Pan Configuration Guides



# PREP TABLES | FLAT LIDS REFRIGERATORS

## SANDWICH

	Description	# of Lids	Dimensions (W x D x H)	Crated Dimensions (L x D x H)	List F.O.B. Griffin
SR27B-8FL	27" one-section with one door	1	27" x 30" x 36.5"	32" x 31.5" x 37"	<b>\$8,050</b>
SR27B-8D2FL	27" one-section with two drawers	1	27" x 30" x 36.5"	32" x 31.5" x 37"	<b>\$11,170</b>
SR36B-10FL	36" one-section with one door	1	36" x 30" x 36.5"	40.5" x 32" x 37"	<b>\$10,100</b>
SR48B-8FL	48" two-section with two doors	1	48" x 30" x 36.5"	52.5" x 30" x 37"	<b>\$10,260</b>
SR48B-12FL	48" two-section with two doors	1	48" x 30" x 36.5"	52.5" x 30" x 37"	<b>\$11,650</b>
SR48B-12D2FL	48" two-section with one door, two drawers	1	48" x 30" x 36.5"	52.5" x 30" x 37"	<b>\$15,200</b>
SR48B-12D4FL	48" two-section with four drawers	1	48" x 30" x 36.5"	52.5" x 30" x 37"	<b>\$17,270</b>
SR60B-8FL	60" two-section with two doors	1	60" x 30" x 36.5"	61.75" x 32" x 37"	<b>\$12,140</b>
SR60B-12FL	60" two-section with two doors	1	60" x 30" x 36.5"	61.75" x 32" x 37"	<b>\$12,410</b>
SR60B-16FL	60" two-section with two doors	1	60" x 30" x 36.5"	61.75" x 32" x 37"	<b>\$12,240</b>
SR72B-12FL	72" three-section with three doors	1	72" x 30" x 36.5"	73.75" x 32" x 37"	<b>\$14,310</b>
SR72B-16FL	72" three-section with three doors	1	72" x 30" x 36.5"	73.75" x 32" x 37"	<b>\$14,500</b>
SR72B-18FL	72" three-section with three doors	1	72" x 30" x 36.5"	73.75" x 32" x 37"	<b>\$13,540</b>

36.5" height to work surface/  
installed with casters

37" height to work surface/  
installed with casters

## MEGA TOPS

	Description	# of Lids	Dimensions (W x D x H)	Crated Dimensions (L x D x H)	List F.O.B. Griffin
SR27B-12MFL	7" one-section with one door	1	27" x 34" x 36.5"	36" x 31.5" x 37"	<b>\$9,240</b>
SR27B-12MD2FL	27" one-section with two drawers	1	27" x 34" x 36.5"	36" x 31.5" x 37"	<b>\$13,830</b>
SR36B-15MFL	36" one-section with one door	1	36" x 34" x 36.5"	40.5" x 36" x 37"	<b>\$10,980</b>
SR48B-12MFL	48" two-section with two doors	1	48" x 34" x 36.5"	52.5" x 36" x 37"	<b>\$12,620</b>
SR48B-18MFL	48" two-section with two doors	1	48" x 34" x 36.5"	52.5" x 36" x 37"	<b>\$12,430</b>
SR48B-18MD2FL	48" two-section with one door, two drawers	1	48" x 34" x 36.5"	52.5" x 36" x 37"	<b>\$16,260</b>
SR48B-18MD4FL	48" two-section with four drawers	1	48" x 34" x 36.5"	52.5" x 36" x 37"	<b>\$19,130</b>
SR60B-12MFL	60" two-section with two doors	1	60" x 34" x 36.5"	61.75" x 36" x 37"	<b>\$14,610</b>
SR60B-18MFL	60" two-section with two doors	1	60" x 34" x 36.5"	61.75" x 36" x 37"	<b>\$14,400</b>
SR60B-24MFL	60" two-section with two doors	2	60" x 34" x 36.5"	61.75" x 36" x 37"	<b>\$13,990</b>
SR60B-24MD2FL	60" two-section with one door, two drawers	2	60" x 34" x 36.5"	61.75" x 36" x 37"	<b>\$20,160</b>
SR60B-24MD4FL	60" two-section with four doors	2	60" x 34" x 36.5"	61.75" x 36" x 37"	<b>\$22,430</b>
SR72B-18MFL	72" three-section with three doors	1	72" x 34" x 36.5"	73.75" x 36" x 37"	<b>\$16,390</b>
SR72B-24MFL	72" three-section with three doors	2	72" x 34" x 36.5"	73.75" x 36" x 37"	<b>\$16,660</b>
SR72B-30MFL	72" three-section with three doors	2	72" x 34" x 36.5"	73.75" x 36" x 37"	<b>\$15,900</b>
SR72B-30MD2FL	72" three-section with two doors, two drawers	2	72" x 34" x 36.5"	73.75" x 36" x 37"	<b>\$22,030</b>
SR72B-30MD4FL	72" three-section with one door, four drawers	2	72" x 34" x 36.5"	73.75" x 36" x 37"	<b>\$24,610</b>
SR72B-30MD6FL	72" three-section with six drawers	2	72" x 34" x 36.5"	73.75" x 36" x 37"	<b>\$27,440</b>

36.5" height to work surface/  
installed with casters

37" height to work surface/  
installed with casters



FEATURES ONLY ON

# STEELHEART® PIZZA PREP TABLES




## HOSHIZAKI EXCLUSIVE Night/Day Mode

When the lid is open, the set point drops to keep food cool in the rail. When the lid is closed, the set point returns to normal so food can stay in the rail overnight without freezing.


## Removable Air Filter

Easily wash the filter of flour and debris, ensuring consistent operation.

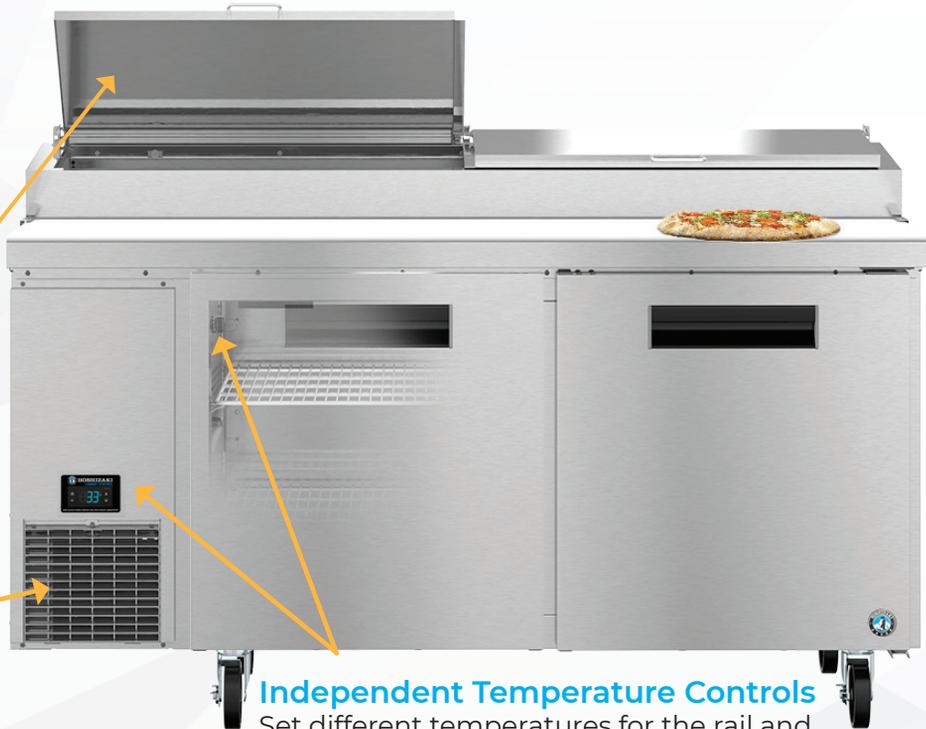

## Independent Temperature Controls

Set different temperatures for the rail and cabinet operation's needs.

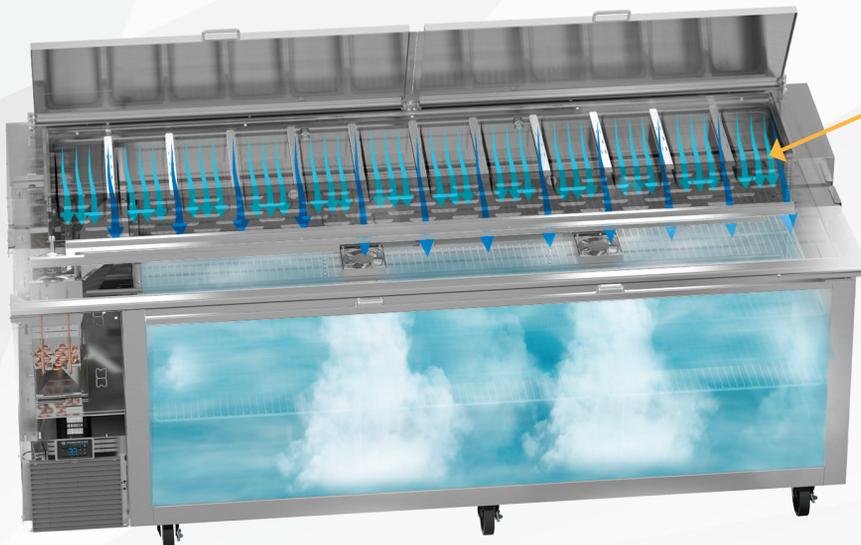

## Optimal Airflow in Rail

Hoshizaki's exclusive Back-To-Front Airflow surrounds each pan for consistent cooling.



Scan to View Pizza Pan Configuration Guides



# PREP TABLES | PIZZA

## With Doors

36" WORK HEIGHT W/ 6" CASTERS



PR46B



PR60B



PR67B



PR93B

- Stainless steel interior and exterior front, sides and top
- Adjustable ducted air distribution for rail/cabinet
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Full complement of 1/3rd size pans are standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 1/2" x 19" Cutting board standard
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR46B	PR60B	PR67B	PR93B
Interior Storage Capacity (AHAM)	11.23 ft <sup>3</sup>	16.63 ft <sup>3</sup>	19.29 ft <sup>3</sup>	29.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	46" x 33.25" x 43.25"	60" x 33.25" x 43.25"	67" x 32.25" x 43.25"	93" x 33.25" x 43.25"
Depth with Cutting Board installed	36.25"	36.25"	36.25"	35.25"
Depth with Doors Open at 90°	59.5"	53.75"	56.75"	56.75"
Interior Door Opening Width	25.5"	19.5"	22.5"	22.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	2	4	4	6
Shelf Dimensions (W X D)	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"	24.75" x 25.5"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	8 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	336 lbs.	410 lbs.	439 lbs.	578 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	96.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	4	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	6.26	7.31
Heat Rejection (BTU / hr)	808	801	890	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$15,730</b>	<b>\$19,280</b>	<b>\$19,330</b>	<b>\$25,120</b>



[CLICK HERE - ACCESSORIES](#)

# PREP TABLES | PIZZA

## Drawer/Door Combinations

36" WORK HEIGHT W/ 6" CASTERS



PR60B-D2



PR67B-D2



PR93B-D2



PR93B-D4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR60B-D2	PR67B-D2	PR93B-D2	PR93B-D4
Interior Storage Capacity (AHAM)	16.63 ft <sup>3</sup>	19.29 ft <sup>3</sup>	29.3 ft <sup>3</sup>	29.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 33.25" x 43.25"	67" x 33.25" x 43.25"	67" x 33.25" x 43.25"	67" x 33.25" x 43.25"
Depth with Cutting Board installed	36.25"	36.25"	36.25"	36.25"
Depth with Door Open at 90°	54.75"	57.75"	56.75"	56.75"
Depth with Drawer Fully Open	(2) 12" x 20" x 6" deep pans	57.5"	56.5"	56.5"
Door Opening Width	19.5"	22.5"	22.5"	22.5"
Door Opening Height	23"	23"	23"	23"
Shelves (#) / Dimensions (WxD)	(2) / 21.5" x 25.5"	(2) / 24.75" x 25.5"	(4) / 24.75" x 25.5"	(4) / 24.75" x 25.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	8	9	12	12
Crated Shipping Weight	430 lbs.	486 lbs.	620 lbs.	675 lbs.
Crated Shipping Dimensions (L x W x H)	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	96.75" x 35.75" x 45"	96.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	6	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.63	6.26	7.31	7.31
Heat Rejection (BTU / hr)	801	890	1039	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° - 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$21,400</b>	<b>\$22,790</b>	<b>\$29,310</b>	<b>\$32,230</b>

# PREP TABLES | PIZZA

## Drawers

36" WORK HEIGHT W/ 6" CASTERS



PR46B-D2



PR60B-D4



PR67B-D4



PR93B-D6

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and drawers are insulated with 2" of CFC free, foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- 1/2" x 19" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR46B-D2	PR60B-D4	PR67B-D4	PR93B-D6
Interior Storage Capacity (AHAM)	11.23 ft <sup>3</sup>	16.63 ft <sup>3</sup>	19.29 ft <sup>3</sup>	29.34 ft <sup>3</sup>
Overall Dimensions (W x D x H including casters)	46" x 32.25" x 43.25"	60" x 33.25" x 43.25"	67" x 33.25" x 43.25"	93" x 33.25" x 43.25"
Depth with Cutting Board installed	35.25"	35.25"	36.25"	36.25"
Depth with Drawer Fully Open	56.5"	56.5"	57.5"	57.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	8	9	12
Crated Shipping Weight	383 lbs.	450 lbs.	531 lbs.	711 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	95.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	6.26	7.31
Heat Rejection (BTU / hr)	808	801	890	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° - 36°F (rail) / 28° to 40°F (cabin)	16° - 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$20,070</b>	<b>\$22,690</b>	<b>\$25,670</b>	<b>\$35,750</b>



[CLICK HERE - ACCESSORIES](#)



# STEELHEART® CHEF BASE

STAY COOL BELOW, WHEN IT'S HOT ON TOP



- Hoshizaki's integrated ceramic heat shield assures stored food products are cool and safe during blazing hot cooking!
- Heavy duty 16-gauge stainless steel top surface.
- 90° side edges maximize top surface area and stability for cooking equipment. Marine edges on both front and back allow for easy cleaning.

## CHEF BASE | FREEZERS

Drawers

Scan to View  
All Chef Bases



CF49B(-L)

NEW!

MODEL	DESCRIPTION	DIMENSIONS (W x D x H)
CF36B(-L)	One-section with 2 drawers	36.5" x 33.25" x 27"
CF49B(-L)	One-section with 2 drawers	49" x 33.25" x 27"
CF60B(-L)	One-section with 2 drawers	60.5" x 32.25" x 27"
CF72B(-L)	Two-section with 4 drawers	72.5" x 33.25" x 27"

-L models place condenser on left side of cabinet.

# CHEF BASE | REFRIGERATORS

## Drawers



CR36B(-L)



CR49B(-L)



CR60B(-L)



CR72B(-L)



CR85B(-L)



CR98B(-L)



CR110B(-L)

- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

Model Number	CR36B(-L)	CR49B(-L)	CR60B(-L)	CR72B(-L)	CR85B(-L)	CR98B(-L)	CR110B(-L)
Interior Storage Capacity (AHAM)	6.30 ft <sup>3</sup>	9.74 ft <sup>3</sup>	12.82 ft <sup>3</sup>	15.69 ft <sup>3</sup>	19.25 ft <sup>3</sup>	22.78 ft <sup>3</sup>	22.78 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	36.5" x 32.25" x 27"	49" x 33.25" x 27"	60.5" x 33.25" x 27"	72.52" x 33.25" x 27"	98" x 33.25" x 27"	98" x 33.25" x 27"	110.5" x 33.25" x 27"
Depth with Drawer Fully Open	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"
Maximum Pan Depth	6"	6"	6"	6"	6"	6"	6"
Worktop Maximum Load Capacity	1000 lbs	1000 lbs	1000 lbs	1500 lbs	1500 lbs	2000 lbs	2000 lbs
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
Pan Capacity (12" x 20")	3	5	7	8	10	12	12
Crated Shipping Weight	295 lbs.	339 lbs.	392 lbs.	500 lbs.	567 lbs.	639 lbs.	671 lbs.
Crated Shipping Dimensions (L x W x H)	38" x 34.5" x 30.5"	51" x 34.5" x 30.5"	62" x 35.5" x 30.5"	74" x 34.5" x 30.5"	87.25" x 34.5" x 30.5"	100" x 34.5" x 30.5"	112.5" x 34.5" x 30.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3.0	3.0	3.0	3.0	3.0
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	0.94	1.07	1.28	1.53	1.86	2.25	2.25
Heat Rejection (BTU / hr) @ NSF	203	272	262	394	444	482	482
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	28° - 45°F	28° - 45°F	28° - 45°F	28° - 45°F	28° - 45°F	28° - 45°F	28° - 45°F
Refrigerant/Charge Amount (oz)	R290(2.4 oz)	R290(2.4 oz)	R290(2.4 oz)	R290(3.1 oz)	R290(3.1 oz)	R290(4.2 oz)	R290(4.2 oz)
List F. O. B. Griffin	<b>\$19,120</b>	<b>\$20,790</b>	<b>\$21,640</b>	<b>\$24,840</b>	<b>\$28,940</b>	<b>\$30,680</b>	<b>\$33,210</b>

-L models place condenser on left side of cabinet.



[CLICK HERE - ACCESSORIES](#)

**NEW**

# VALIANCE<sup>®</sup>

by  **HOSHIZAKI**

## **RELIABLE. PRACTICAL. SMART-VALUE.** ENGINEERED FOR EVERYDAY DEMANDS.

Valiance<sup>™</sup> by Hoshizaki is designed for operators who want reliable, quality refrigeration that delivers exceptional value. With Valiance<sup>™</sup>, you get a product that stands toe-to-toe with leading competitors-giving you the confidence to run your operation smoothly and efficiently, without overextending your budget.

Choose Valiance<sup>™</sup> when you want proven performance and peace of mind at a price that makes sense for your business growth.

- Environmentally friendly R290 hydrocarbon refrigerant
- Field reversible stay-open doors - no kit needed
- Uprights accommodate full size tray pans.



More models coming soon. Scan to see current offerings



# VALIANCE™ | UPRIGHTS



VR1A-FS ★ / VF1A-FS ★



VR2A-FS ★ / VF2A-FS ★



- Self-closing & stay open hinge
- Exterior DualGuard™ coating is smudge-resistant providing tough protection against corrosion, contributing to the unit's longevity.

- SmartCheck™ timer initiated and time or temperature terminated automatic defrost.

Model Number	VR1A-FS ★	VF1A-FS ★	VR2A-FS ★	VF2A-FS ★
Interior Storage Capacity (AHAM)	19.07 ft <sup>3</sup>	19.07 ft <sup>3</sup>	42.45 ft <sup>3</sup>	42.45 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	26.88" x 32.00" x 81.70"	26.88" x 32.00" x 81.70"	54.31" x 32.00" x 81.70"	54.31" x 32.00" x 81.70"
Depth with Doors Open at 90°	57.87"	57.87"	57.5"	57.5"
Interior Door Opening Width	22.25"	22.25"	22.63"	22.63"
Interior Door Opening Height	52.31"	52.31"	52.31"	52.31"
Adjustable Shelves	3	3	6	6
Shelf Dimensions (W x D)	21.56" x 24.88"	21.65" x 24.88"	23.94" x 25.16"	23.94" x 25.16"
Crated Shipping Weight	286 lbs.	310 lbs.	471 lbs.	543 lbs.
Crated Shipping Dimensions (L x W x H)	33.50" x 28.75" x 83.88"	33.50" x 28.75" x 83.88"	58" x 33.5" x 83.88"	58" x 33.5" x 83.88"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.1	4.1	3.5	4.6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.96	3.89	1.48	6.94
Approx. Nominal Compres. BTU/HR (HP)	1461	1115	2322(1/2)	1718(1/2HP)
Voltage Range	103 - 127	103 - 127	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	36° to 42°F	-4° to 4°F	36° to 42°F	-4° to 4°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$5,270</b>	<b>\$6,350</b>	<b>\$7,500</b>	<b>\$9,600</b>

DUAL GUARD™



[CLICK HERE - ACCESSORIES](#)

# VALIANCE™ | UNDERCOUNTERS

## Refrigerators and Freezers



VUR27A★ / VUF27A★



VUR48A★ / VUF48A★

- Self-closing & stay open hinge
- SmartCheck™ timer initiated and time or temperature terminated automatic defrost.
- Raised Door Liner protects the gasket to extend lifetime of door.

Model Number	VUR27A★	VUF27A★	VUR48A★	VUF48A★
Interior Storage Capacity (AHAM)	6.33 ft <sup>3</sup>	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>	12.09 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 33.75"	47.75" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	54.50"	55.75"	51.50"	52.75"
Interior Door Opening Width	22.60"	22.60"	19.50"	19.50"
Interior Door Opening Height	22.75"	22.75"	22.75"	22.75"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	21.25" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	200 lbs.	290 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	33" x 29" x 37"	52" x 33" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	1.2	1.8	1.7
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.95	1.92	1.21	3.44
Approx. Nominal Compres. BTU/HR (HP)	1289(1/6)	993(1/5)	1709(1/6)	1468(1/3)
Voltage Range	115-127	115 - 127	115-127	115 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	-5 to 5°F	33° to 39°F	-5 to 5°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$3,580</b>	<b>\$3,990</b>	<b>\$4,990</b>	<b>\$5,380</b>

# VALIANCE™ | PREP TABLES

## Refrigerators



- SmartCheck™ timer initiated and time or temperature terminated automatic defrost.
- No-Snag Cutting board
- Notched locking tab divider bars

- Exclusive ducted airflow sends air around the bottom and sides of the pans ensuring the rail, the section most vulnerable to inconsistent temperature control, stays cool and food stays at a safe temperature.

Model Number	VSR27A-8	VSR48A-12
Interior Storage Capacity (AHAM)	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	26.75" x 30.13" x 43"	47.75" x 30.13" x 43"
Depth with Doors Open at 90°	54.76"	51.76"
Interior Door Opening Width	22.75"	19.75"
Interior Door Opening Height	22.88"	22.88"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	34.5" x 29.13" x 45.5"	52.13" x 34.5" x 45.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2.1	3.3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.89	2.16
Approx. Nominal Compres. BTU/HR (HP)	1461(1/6)	2130(1/6)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	32.5° to 36.5°F	32.5° to 36.5°F
Refrigerant	R290	R290
List F.O.B. Griffin	<b>\$4,200</b>	<b>\$6,000</b>

DUAL GUARD™



[CLICK HERE - ACCESSORIES](#)

# GRAB & GO MADE EASY

## MERCHANDISERS FOR DRINKS ON DEMAND

Hoshizaki's energy-efficient glass door merchandiser refrigerators and freezers showcase your products with maximum visibility and reliable cooling. They keep beverages, snacks, and perishable items at ideal temperatures. Available in silver, black, or white to complement any space, these merchandisers are perfect for retail, food service, offices, and more.



## GLASS DOOR MERCHANDISER FREEZER

- ▶ Silver painted galvanized steel exterior and interior with NSF approved white steel interior and stainless steel floor
- ▶ Forced air evaporator for quick temperature pull down
- ▶ Energy saving hot gas loop and an electric glass door heater

Model Number	FM-23-HC
Overall Dimensions (W x D x H) Including Leveling Feet	30" x 29.75" x 78"
Adjustable Shelves	5
Shelf Dimensions (W x D)	24.56" x 23.25"
Crated Shipping Weight	385 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 32.5" x 85.25"
Voltage	115V/60/1
Amperage (AMP)	4.8
HACR Breaker (AMP)	15
Voltage Range	104 - 127
Ambient Temp. Range	60° - 86°F
Control Set Point Range	-10° to -0°F
Refrigerant	R290
List F.O.B. Griffin	<b>\$13,650</b>



[CLICK HERE - ACCESSORIES](#)

# GLASS DOOR MERCHANDISERS

## Refrigerators

Choose from Black, White or Silver models



- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass
- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (except for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC ★	RM-26-HC ★	RM-45-SD-HC ★	RM-49-HC ★	RM-65-HC ★
Color Options	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white			
Interior Storage Capacity (AHAM)	7 ft <sup>3</sup>	10 ft <sup>3</sup>	26 ft <sup>3</sup>	38.26 ft <sup>3</sup>	49 ft <sup>3</sup>	56.04 ft <sup>3</sup>
Capacity	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
Overall Dimensions (W x D x H Including Leveling Feet)	21" x 25.25" x 39"	25" x 22.5" x 54.75"	29.75" x 29.75" x 79.75"	51" x 29" x 79.5"	60" x 29.75" x 78"	78" x 29.75" x 78"
Adjustable Shelves	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
Shelf Dimensions (W x D)	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
Crated Shipping Weight	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
Crated Shipping Dimensions (L x W x H)	28" x 24.5" x 44"	30" x 28" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.25" x 86"	81" x 32.25" x 84"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3.2	1.8	3.5	6.5	7.6	8.2
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ENERGY STAR / DOE	1.38	1.1	1.81	4.55	4.37	5.67
Approx. Nominal Compress BTU/HR (HP)	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
Factory Set Point Range	35° - 44°F	35° - 43°F	35° - 44°F	38° - 47°F	35° - 44°F	35° - 43.5°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$5,660</b>	<b>\$6,230</b>	<b>\$8,200</b>	<b>\$12,120</b>	<b>\$12,630</b>	<b>\$16,850</b>

# UNDERCOUNTER | COMPACT REFRIGERATORS

## Solid or Glass Doors



HR15A★



HR15A-G



HR24C★



HR24C-G

- Stainless steel interior and exterior
- UL approval for outdoor use
- ADA Compliant 
- Lockable stainless steel door is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Interior LED lighting
- Optional wine shelves

Model Number	HR15A ★	HR15A-G	HR24C ★	HR24C-G
Interior Storage Capacity (AHAM)	2.54 ft <sup>3</sup>	2.54 ft <sup>3</sup>	3.87 ft <sup>3</sup>	3.87 ft <sup>3</sup>
Overall Dimensions (W x D x H including legs)	14.8" x 25.75" x 31.5"	14.8" x 25.75" x 31.5"	23.4" x 26.5" x 31.5"	23.4" x 26.5" x 31.5"
Depth with Doors Open at 90°	37.25"	37.25"	46.7"	46.7"
Adjustable Shelves	2	2	3	3
Shelves (#) / Dimensions(W x D)	(2) / 10" x 20" adjustable slide out shelf	(2) 10" x 20"	(1) / 18.5" x 17" (2) / 18.5" x 12"	(1) / 18.5" x 17" (2) / 18.5" x 12"
Crated Shipping Weight	115 lbs	115 lbs	115 lbs	115 lbs
Crated Shipping Dimensions (L x W x H)	30.6" x 18.75" x 37"	30.6" x 18.75" x 37"	26.8" x 24" x 36.6"	26.8" x 24" x 36.6"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	0.9	0.9	1.1	1.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.54	0.54	0.64	0.64
Heat Rejection (BTU / hr)*	145	145	648	648
Voltage Range	104 - 127	104-127	115 - 127	115 - 127
Ambient Temp. Range	45° - 90°F	45° - 90°F	45° - 100°F	45° - 100°F
Control Set Point Range	28° - 40°F	28° - 40°F	34° - 52°F	34° - 52°F
Refrigerant	R600a	R600a	R600a	R600a
List F.O.B. Griffin	<b>\$3,510</b>	<b>\$4,700</b>	<b>\$4,490</b>	<b>\$5,760</b>

\*Based on 100°F ambient cycling at set point

# SUSHI CASES | UPRIGHTS

## FEATURES & BENEFITS OF HOSHIZAKI SUSHI CASES

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant




Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight	List F.O.B. Griffin
HNC-120BA-R-SLH	Air-Cooled	Right Side	47.2" x 13.6" x 11"	51.5" x 16.25" x 20.25"	115V/60/1	94 Lbs.	\$7,060
HNC-120BA-L-SLH	Air-Cooled	Left Side	47.2" x 13.6" x 11"	51.5" x 16.25" x 20.25"	115V/60/1	94 Lbs.	\$7,060
HNC-150BA-R-SLH	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.25" x 20.25"	115V/60/1	115 Lbs.	\$7,620
HNC-150BA-L-SLH	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.25" x 20.25"	115V/60/1	115 Lbs.	\$7,620
HNC-180BA-R-SLH	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.25" x 20.25"	115V/60/1	130 Lbs.	\$8,520
HNC-180BA-L-SLH	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.25" x 20.25"	115V/60/1	130 Lbs.	\$8,520
HNC-210BA-R-SLH	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.25" x 20.25"	115V/60/1	145 Lbs.	\$9,430
HNC-210BA-L-SLH	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.25" x 20.25"	115V/60/1	145 Lbs.	\$9,430

"R" - Condensing Unit is on RIGHT from front view  
 "L" - Condensing Unit is on LEFT from front view  
 Not intended for overnight storage. NSF Standard 7



HNC-120BA-L-SLH

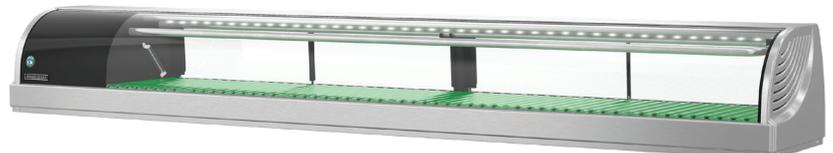

HNC-210BA-L-SLH



HNC-150BA-L-SLH



HNC-180BA-L-SLH



## READY AND ON TAP WHEN YOU ARE

Hoshizaki's **BACK BAR REFRIGERATORS**, **BOTTLE COOLERS**, and **DIRECT DRAW REFRIGERATORS** are built to keep beverages cold and service efficient. Zero clearance installation is ideal for tight spaces.



# BACK BAR | REFRIGERATORS

## Glass Doors



BB59-G



BB69-G



BB80-G-S



BB95-G

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59-G(-S*)	BB69-G(-S*)	BB80-G(-S*)	BB95-G(S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity (AHAM) cu ft	18.45 ft <sup>3</sup>	21.80 ft <sup>3</sup>	26.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Capacity 12oz. cans	852	1014	1092	1302
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	310 lbs. 330(-S*) lbs.	345 lbs. 395(-S*) lbs.	370 lbs. 430(-S*) lbs.	435 lbs. 490(-S*) lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$9,260</b> <b>*\$10,690</b>	<b>\$10,460</b> <b>*\$12,150</b>	<b>\$12,350</b> <b>*\$14,420</b>	<b>\$12,570</b> <b>*\$15,100</b>

\*(-S) Stainless Steel Exterior option available - Made to order.

# BACK BAR | REFRIGERATORS

## Solid Doors



BB59



BB69



BB80-S



BB95

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59(-S*)	BB69(-S*)	BB80(-S*)	BB95(-S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity (AHAM) cu ft	18.16 ft <sup>3</sup>	21.8 ft <sup>3</sup>	28.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Capacity 12oz. cans	852	1014	1092	1302
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	315 lbs. 320(-S*) lbs.	350 lbs. 390(-S*) lbs.	375 lbs. 420(-S*) lbs.	450 lbs. 480(-S*) lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$8,840</b> <b>*\$10,920</b>	<b>\$9,660</b> <b>*\$11,320</b>	<b>\$11,160</b> <b>*\$14,040</b>	<b>\$11,360</b> <b>*\$14,240</b>

\*(-S) Stainless Steel Exterior option available - Made to order.

# SLIDE TOP | BOTTLE COOLERS

## Slide Top



CC50



CC65



CC80-S











CC95

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	CC50(-S*)	CC65(-S*)	CC80(-S*)	CC95(-S*)
Cabinet Dimensions† W x D x H	50.5" x 31.25" x 39"	65.5" x 26.5" x 33.38"	80" x 26.5" x 33.38"	95" x 26.5" x 33.38"
Lids	2	2	3	3
Bin Dividers	3	4	6	7
Capacity (AHAM) cu ft	14.4 ft³	19.6 ft³	24.67 ft³	27.98 ft³
Capacity 12oz. / 20oz. Cans	704 / 286	890 / 360	1150 / 547	1408 / 672
HP	1/4	1/3	1/3	1/2
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.0	2.0	2.0	2.0
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	53.5" x 31.25" x 39"	68.5" x 31.25" x 39"	82.5" x 31.25" x 39"	98.5" x 31.25" x 39"
Shipping Weight	235 lbs.	275 lbs.	315 lbs.	355 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$7,300</b> * <b>\$8,740</b>	<b>\$8,110</b> * <b>\$9,480</b>	<b>\$10,230</b> * <b>\$11,700</b>	<b>\$10,800</b> * <b>\$12,400</b>

\*(-S) Stainless Steel Exterior option available - Made to order.  
† Does not include 1" rear cabinet bumper or bottle cap catcher depth

# BACK BAR REFRIGERATION KEG FOOTPRINTS

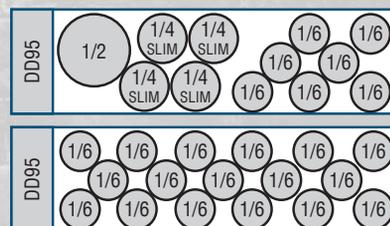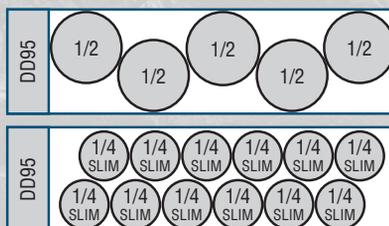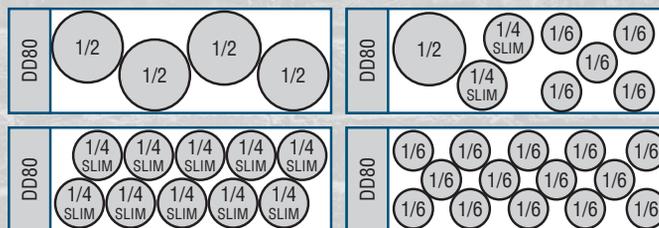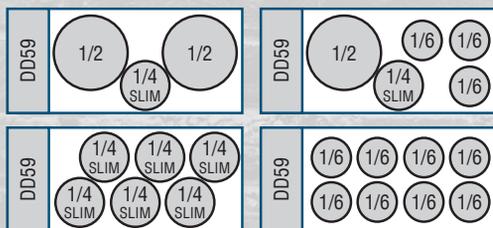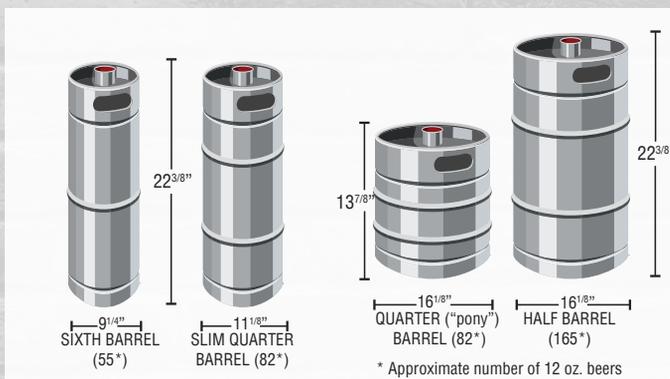

# DIRECT DRAW | REFRIGERATORS



Keg cushions standard to protect floor and increase air flow around kegs



- Included: Polished stainless-steel insulated towers with plated brass faucet
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Heavy duty 18-gauge stainless steel top
- Stainless steel threshold protects door frame from damage when loading and unloading
- Stainless steel interior

Model Number	DD24(-S*)	DD59(-S*)	DD69(-S*)	DD80(-S*)	DD95(-S*)
Cabinet Dimensions W x D x H	24.88" x 30" x 39.38"	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Door(s)	1	2	2	3	3
Included Tower(s)	1	2	2	2	2
Tap(s)	1	3	3	4	4
Capacity (AHAM) cu ft	7.46 ft <sup>3</sup>	18.45 ft <sup>3</sup>	21.8 ft <sup>3</sup>	28.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Capacity 1/2 Barrels	1	2**	3	4	5
HP	1/6	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	2.5	2.5	2.5	2.5
NEMA Plug	5-15P	5-15P	5-15P	5-15P	5-15P
Shipping Dimensions W x D x H	34.5" x 29" x 45.5"	62.5" x 31.25" x 42.5"	72.5" x 31.25" x 42.5"	82.5" x 31.25" x 42.5"	98.5" x 31.25" x 42.5"
Shipping Weight	175 lbs.	345 lbs. 310(-S*) lbs.	360 lbs. 350(-S*) lbs.	385 lbs. 375(-S*) lbs.	430 lbs. 420(-S*) lbs.
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	<b>\$6,460</b> <b>*\$7,970</b>	<b>\$10,770</b> <b>*\$12,390</b>	<b>\$11,530</b> <b>*\$14,520</b>	<b>\$12,620</b> <b>*\$14,910</b>	<b>\$12,820</b> <b>*\$15,570</b>

\*(-S) Stainless Steel Exterior option available - Made to order.  
 \*\* DD59 will also accommodate (1)1/4 slim keg.



# ICE ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5061	Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (order as accessory)	AM-50BAJ, C-80BAJ, KM-81BAJ, KM-116BAJ	\$990
HS-0182	Side Trim Kit	AM-50BAK, C-80BAK	\$370
H9320-51	Recommended Water Filtration - Single Configuration	AM-50BAJ, C-80BAJ, KM-81BAJ, KM-116BAJ, KM-161B_J, KM-231BAJ, KM-301B_J, KM-350M_J, KM-520M_J, KM-660M_J, KMD-410M_J, KMD-505M_J, KMD-530M_J, KMD-705M_J, KML-325M_J, KML-500M_J, KML-700M_J, IM-500SAB, IM-200BAC, IM-50BAA-LM, F-300BAJ, F-330BAJ, F-500BAJ, F-450MAJ, F-801M_J, F-1002M_J, F-1501M_J, F-2001M_J, F-330BAJ-C, F-450MAJ-C, F-801M_J-C, F-1002M_J-C, F-1501M_J-C, F-2001MRJ-C, FD-650M_J-C, FD-1002M_J-C, FS-1001MLJ-C, FS-1022MLJ-C, FS-1501MLJ-C	\$600
H9320-52	Recommended Water Filtration - Double Configuration	KM-901M_J, KM-1100M_J, KMD-860M_J, IM-50BAA-Q, KMS-822MLJ, KMS-1122MLJ, KMS-1402MLJ	\$1,010
H9320-53	Recommended Water Filtration - Triple Configuration	KM-1301S_J, KM-1340M_J, KM-1601MRJ, KM-1601S_J, KM-1900S_J, KM-2200S_J3, KM-2600S_J3, KMH-2100S_J, KMS-2000MLJ	\$1,420
HS-5426	Tamper Proof Kit - Air-Cooled Units	KM-350M_J, KM-520M_J, KM-660M_J	\$650
HS-5427	Tamper Proof Kit - Water/Remote Units	KM-520M_J, KM-660M_J	\$650
HS-5245	Tamper Proof Kit - Air-Cooled Units	KM-901M_J, KM-1100M_J	\$760
HS-5246	Tamper Proof Kit - Water/Remote Units	KM-901M_J, KM-1100M_J	\$750
HS-5252	Tamper Proof Kit - Air-Cooled Units	KM-1301S_J, KM-1601S_J	\$840
HS-5253	Tamper Proof Kit - Water/Remote Units	KM-1301S_J, KM-1601S_J	\$840
HS-5030	Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral)	KM-1340M_J, KM-1601MRJ, KM-1601S_J, KM-1900S_J, KMH-2100S_J	\$260
HS-5062	Extension bracket for Freestyle application	KMS-822MLJ	\$230
HS-5255	Tamper Proof Kit	KM-2200S_J3, KM-1900S_J	\$898
HS-5348	Soft Cubelet Ice Kit	F-1002M_J-C	\$790
HS-5396	Soft Cubelet Ice Kit	F-1501M_J-C / F-2001M_J-C	\$990
LP-6 LEG	Four 6" Stainless Steel Legs Package available (optional)	F-300BAJ, F-330BAJ, F-500BAJ, F-330BAJ-C, B-250SF, B-500SF, BD-500SF, B-700SF, B-800SF, B-900SF	\$350
HS-2120	Cutter head for finer flaked ice	F-801M_J, F-1002M_J	\$280
HS-2036	Top Kit for KM-350M, KM-520M or KM-660M	DM-200B	\$320
DM Legs	Four 4" Black Die Cast Legs Kit	DM-200B	\$260
HS-5329	Top Kit for for FS-1022MLJ-C	DM-4420N	\$260
HS-5330	Top Kit for for FD-650M_J-C & FD-1002M_J-C	DM-4420N, IM-500SAB	\$590
HS-2033	Order 8" Top Kit to accommodate 22"W ice machines	B-250SF, B-900SF, B-500SF	\$350
HS-5429	Bin Door Catch	B-250SF	\$120
HS-2035	Order 22" Top Kit to accommodate 30"W ice machines	B-800SF, B-900SF, B-700SF	\$370
HS-2032	4" Top Kit to accommodate (2) 22"W ice machines	B-800SF, B-900SF	\$310
HS-2132	Top Kit: KMD application	B-900SF	\$690
HS-2129	Top Kit: KMD application	B-500SF	\$400
HS-2034	Order 14" Top Kit to accommodate 30"W ice machines	B-700SF, B-800SF	\$350
HS-2130	Top Kit: KMD application	B-700SF	\$460
HS-2066	Seismic Kit for SD 500 Stands	SD Stands	\$300
HS-2071	Leg Seismic Kit SD 500 Stands	SD Stands	\$760
HS-2150	Quick-Connect Kit (not required if line set is ordered)	URC-5FZ	\$330
HS-5604	25' Brazing Required R-404A	URC-9FZ	\$650
HS-5505	35' Brazing Required R-404A	URC-9FZ, URC-14FZ	\$810
HS-5606	55' Brazing Required R-404A	URC-9FZ, URC-14FZ	\$1,110
HS-5299	25' Brazing Required R-404A	SRC-10J	\$650
HS-5300	35' Brazing Required R-404A	SRC-10J	\$830
HS-5301	55' Brazing Required R-404A	SRC-10J	\$1,040

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5102	Hail Guard Kit	URC-14FZ	\$390
HS-0243	25' Brazing Required R-404A	SRK-20J, SRK-20J3	\$860
HS-0244	35' Brazing Required R-404A	SRK-20J, SRK-20J3	\$1,070
HS-0245	55' Brazing Required R-404A	SRK-20J, SRK-20J3	\$1,380
HS-5600	Booster Antenna	Remote Monitoring System	\$110
HS-5607	Optional Bin Scoop Holder	All SF Bins	\$160
HS-5323	25' Brazing Required R-404A	URC-22FZ	\$650
HS-5324	35' Brazing Required R-404A	URC-22FZ	\$830
HS-5325	55' Brazing Required R-404A	URC-22FZ	\$1,040
HS-5095	Hail Guard Kit	URC-22FZ	\$290
HS-0250	25' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3	\$830
HS-0251	35' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3	\$1,040
HS-0252	55' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3	\$1,340
HS-5587	Brazed Line Set 25 Ft for URC-5FZ	URC-5FZ	\$640
HS-5588	Brazed Line Set 35 Ft for URC-5FZ	URC-5FZ	\$810
H9320-54	Single - Medical System	Single Manifold System - Medical	\$610
HS-5530	Stacking Kit (Need 2 for stacked 3 high)	IM-500	\$830

#### DCM(-OS) & DB DISPENSER ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
LP-4 LEG	Four 4" Stainless Steel Legs Package available (optional)	DCM-271BAH(-OS)	\$310
LP-6 LEG	Four 6" Stainless Steel Legs Package available	DCM-300BAH(-OS), DCM-500BAH(-OS), DCM-75_B_H(-OS), DB-200H	\$350
LP-6P LEG	Four 6" Painted Legs Package available	DCM-300BAH(-OS), DCM-500BAH(-OS), DCM-75_B_H(-OS)	\$310
LP-6 FLANGE LEG	Four 6" Stainless Steel Legs Package available	DB-130H, B-300SF, BD-300SF, SD Stands	\$400
SD-271	Equipment Stand	DCM-271BAH(-OS)	\$1,870
SD-500	Equipment Stand	DCM-300BAH-OS, DCM-500BAH(-OS)	\$2,080
SD-750	Equipment Stand	DCM-75_B_H(-OS)	\$2,510
HS-2036	Top Kit for KM-350M, KM-520M or KM-660M	DB-200H	\$300
HS-2066	Seismic Wall Mount Kit	DCM-300BAH(-OS), DCM-500BAH(-OS)	\$280
HS-2067	Seismic Wall Mount Kit	DCM-75_B_H(-OS)	\$370
HS-2070	Seismic Wall Mount Kit	DCM-271 BAH(-OS)	\$280
HS-2071	Leg Seismic Kit	DCM-300BAH-OS, DCM-500BAH(-OS)	\$760
HS-2072	Leg Seismic Kit	DCM-75_B_H(-OS)	\$700
HS-2104	Wall Mount Kit	DCM-271BAH(-OS)	\$760
HS-2109	Chute & grill replacement kit	DB-130H, DB-200H	\$700
HS-5749	Water Dispense Kit	DB-130H & DB-200H	\$1,250
HS-5559	Round Anti-Microbial Cover (25 mm diameter)	DCM-300BAH, DCM-500BAH, DCM-75_B_H	\$100
H9320-54	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Single Configuration	DCM-271BAH, DCM-300BAH, DCM-500BAH, DCM-75_B_H	\$610
H9655-08	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Cartridge (1 pk)	DCM-271BAH, DCM-300BAH, DCM-500BAH, DCM-75_B_H	\$420



# REFRIGERATION ACCESSORIES

## CASTERS & LEGS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-3546	4" Casters - Set of four, two with brakes	1/2 Section Uprights	\$620
HS-3547	4" Casters - Set of six, three with brakes	3 Section Uprights	\$950
HS-5066	6" Casters - Set of four, two with brakes	Pizza Preps and undercounter/worktop/prep tables	\$240
HS-5035	4" Casters - Set of four, two with brakes	1, 2 & 3 Section Horizontal Units	\$150
HS-5036	6" Casters - Set of four, two with brakes	1, 2 & 3 Section Horizontal Units	\$230
HS-5037	2 1/4" Casters - Set of four, two with brakes for ADA Compliant dimensions	1 & 2 Section Undercounters	\$160
HS-5320	3 3/8" Casters - Set of four, two with brakes for ADA Compliant dimensions	for pizza preps	\$160
HS-5321	3 3/8" Casters - Set of six, three with brakes for ADA Compliant dimensions	for pizza preps	\$240
HS-5662	4" Casters with Shims (6pk)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95	\$410
HS-5663	4" Casters with Shims (4pk)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69	\$260
LP-6 LEG	6" Stainless Steel Legs, set of 4	1, 2 & 3 Section Upright Models [3 section needs 2 sets]	\$320
LP-6P LEG	6" Painted Leg (grey), set of 4	1, 2 & 3 Section Upright Models [3 section needs 2 sets]	\$300

## FOOT PEDALS

Model Number	Description	For Use With Steelheart® Models	List F.O.B. Griffin
HS-5378	One Door Foot Pedal (right foot pedal)	Left Hinge - upright, solid door Steelheart® models	\$440
HS-5379	One Door Foot Pedal (left foot pedal)	Right Hinge - upright, solid door Steelheart® models	\$440
HS-5380	Two Door Foot Pedal	2 & 3 Section Uprights	\$770
HS-5555	Left-Hinged Door Foot Pedal (right foot pedal)	Solid door undercounter, worktop and sandwich preps	\$430
HS-5556	Right-Hinged Door Foot Pedal (left foot pedal)	Solid door undercounter, worktop and sandwich preps	\$420

## DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-5258	Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge)	\$310
HS-5259	Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge)	\$300

## SHELVES

Model Number	Description	For Use With Steelheart® Models	List F.O.B. Griffin
HS-5052	Industrial Strength Epoxy Coated Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$300
HS-5053	Industrial Strength Epoxy Coated Shelf, 3 each, Includes 12 Pilaster Clips	1,2,3 Section Uprights	\$430
HS-5054	Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$450
HS-3504	Industrial Strength Stainless Steel Center Shelf	2 Section Uprights	\$420
HS-3505	Industrial Strength Stainless Steel Center Shelf, 3 each	2 Section Uprights	\$670
HS-3509	Industrial Strength Epoxy Coated Shelf Center Shelf	2 Section Uprights	\$330
HS-3510	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	2 Section Uprights	\$500
HS-3550	Pass-Thru Epoxy Shelf, 3 pack	1 & 2 Section Pass-Thrus	\$420
HS-3551	Pass-Thru Epoxy Shelf, 1 pack	1 & 2 Section Pass-Thrus	\$360
HS-3552	Pass-Thru Stainless Steel Shelf, 3 Pack	1 & 2 Section Pass-Thrus	\$1,270
HS-3553	Pass-Thru Stainless Steel Shelf, 1 Pack	1 & 2 Section Pass-Thrus	\$620
HS-5388	Industrial Strength Epoxy Coated Shelf Center Shelf, 1 each	3 Section Uprights	\$330
HS-5389	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	3 Section Uprights	\$770
HS-5057	Tempered Glass Shelves, 3 each	For use with HR24C-G	\$330
HS-5058	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Preps	\$130
HS-5235	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 36" Undercounters, Worktops and Preps	\$280
HS-5059	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Preps	\$140
HS-5108	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Preps	\$180
HS-5116	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Preps	\$360
HS-5117	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Preps	\$420
HS-5118	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Preps	\$500
HS-5151	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR67/93B	\$300
HS-5152	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR46B	\$300
HS-5153	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR67/93B	\$500
HS-5154	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR46B	\$530
HS-5169	Lower Stainless Steel Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Preps	\$360
HS-5580	Stainless shelves - 1 pk	PR60B	\$500

**SHELVES - CONTINUED**

HS-5579	Additional epoxy shelf - 1 pk	PR60B	\$290
HS-5592	Standard wooden wine rack shelves	HR-15	\$110
HS-5593	Small wooden wine rack shelves	HR-24	\$130
HS-5594	Large wooden wine rack shelves	HR-24	\$150
HS-5595	Complete wine shelf set for HR-15 (set of 4 wood shelves with 4 slidina rails)	HR-15	\$1,110
HS-5596	Complete wine shelf set for HR-24 (set of 5 wood)	HR-24	\$1,190
HS-5614	Narrow Unit Shelves (Epoxy, 1 pack)	FSN models	\$640
HS-5658	Narrow Unit Shelves (Epoxy, 1 pack)	FSN models	\$300
HS-5679	Narrow Unit Shelves (SS, 1 pack)	FSN models	N/A
HS-5680	Narrow Unit Shelves (SS, 3 pack)	FSN models	N/A

**OVERSHELVES**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5172	Single Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Preps & Mega Top	\$ 1,010
HS-5237	Single Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,110
HS-5229 <sup>‡</sup>	Single Overshelf for 46" / 93" Pizza Cabinet	46" / 93" Pizza Preps - cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.	\$1,390
HS-5173	Single Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,140
HS-5174	Single Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,380
HS-5639	Single Overshelf for 60" Pizza Cabinet	60" Pizza Cabinet	\$1,130
HS-5231 <sup>‡</sup>	Single Overshelf for 67" Pizza Cabinet	67" Pizza Cabinet	\$1,480
HS-5175	Single Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,670
HS-5163	Double Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,340
HS-5236	Double Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,490
HS-5228 <sup>‡</sup>	Double Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Preps 93" cabinets can accommodate (2) HS-5229 Single Overshelves	\$1,870
HS-5164	Double Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,950
HS-5165 <sup>‡</sup>	Double Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Preps & Mega Top	\$2,490
HS-5640	Double Overshelf for 60" Cabinet	60" Pizza Preps	\$2,060
HS-5230 <sup>‡</sup>	Double Overshelf for 67" Cabinet	67" Pizza Prepss	\$2,450
HS-5166 <sup>‡</sup>	Double Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Preps & Mega Top	\$3,210

<sup>‡</sup>Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after) / <sup>‡</sup>Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after) / \* 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.

**TRAY / PAN SLIDES**

**(16) Sets on 3" Centers per section is the recommended maximum capacity for Uprights. Units can hold as many as (24) sets on 2" Centers per section.**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-3557	Stainless Steel Bottom Support Universal Pan Slides (1 Set), Includes 4 Pilaster Clips	Steelheart models	\$290
HS-3558	Stainless Steel Bottom Support Universal Pan Slides (4 Sets), Includes 16 Pilaster Clips	Steelheart models	\$900
HS-5092	Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips	Steelheart models	\$220
HS-5093	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips	Steelheart models	\$660

**PIZZA PREP TABLES - PAN SLIDES**

Model Number	Description	List F.O.B. Griffin
HS-5514	Removable Tray Pan Rack For Pizza Preps- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing	\$710

**FLAT LIFT OFF COVERS**

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5070	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	SR27B-12M, SR48B-12MD4 SR48B-12M, SR60B-12M, *SR60B-24M, *SR72B-24M, SR27B-12MD, *SR60B-24MD4 (*2 of each cover required per model)	\$430
HS-5279	Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening	SR36B-15M	\$430
HS-5071	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR48B-18M, SR60B-18M, SR72B-18M, SR48B-18MD4	\$430
HS-5072	Flat Lift-Off Stainless Steel Cover	SR27B-8, SR27B-8D	\$430
HS-5073	Flat Lift-Off Stainless Steel Cover	SR48B-8, SR60B-8	\$430
HS-5278	Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening	SR36B-10	\$440
HS-5074	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	SR48B-12, SR60B-12, SR72B-12	\$430
HS-5106	Flat Lift-Off Stainless Steel Cover	SR60B-16, SR72B-16	\$570
HS-5107	Flat Lift-Off Stainless Steel Cover	SR72B-18	\$580
HS-5070 + HS-5071	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR72B-30M, SR72B-30MD6 (1 of each cover required per model)	\$430 (Each Cover)

### COMPOSITE CUTTING BOARDS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5202	Dual Rear Cutting Board		\$410
HS-5265	10" x 27" x 1/2" Composite Cutting Board	27" Sandwich Preps & Mega Top	\$430
HS-5266	10" x 36" x 1/2" Composite Cutting Board	36" Sandwich Preps & Mega Top	\$580
HS-5267	10" x 48" x 1/2" Composite Cutting Board	48" Sandwich Preps & Mega Top	\$780
HS-5268	10" x 60" x 1/2" Composite Cutting Board	60" Sandwich Preps & Mega Top	\$960
HS-5269	10" x 72" x 1/2" Composite Cutting Board	72" Sandwich Preps & Mega Top	\$1,150
HS-5270	19" x 46" x 1/2" Composite Cutting Board	46" Pizza Preps	\$1,410
HS-5271	19" x 67" x 1/2" Composite Cutting Board	67" Pizza Preps	\$2,110
HS-5272	19" x 93" x 1/2" Composite Cutting Board	93" Pizza Preps	\$2,950

### GLASS DOOR MERCHANDISER ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5446	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-10-HC	\$240
HS-5291	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-26-HC	\$270
HS-5293	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-45-SD-HC	\$270
HS-5295	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-49-HC	\$270
HS-5290	Price Tag Holder	RM-10-HC	\$20
HS-5292	Price Tag Holder	RM-26-HC	\$20
HS-5294	Price Tag Holder	RM-45-SD-HC	\$20
HS-5296	Price Tag Holder	RM-49-HC	\$20
HS-5447	Epoxy Shelf, Includes 4 Pilaster Clips	RM-10-HC	\$150
HS-5317	Epoxy Shelf, Includes 4 Pilaster Clips	RM-26-HC	\$230
HS-5318	Epoxy Shelf, Includes 4 Pilaster Clips	RM-45-SD-HC	\$230
HS-5319	Epoxy Shelf, Includes 4 Pilaster Clips	RM-49-HC	\$230
HS-5343	Epoxy Shelf, Includes 4 Pilaster Clips	RM-7-HC	\$90
HS-5344	Epoxy Floor Shelf	RM-7-HC	\$70
HS-5288	4" Casters-Set Of Four, Two With Brakes	RM-10-HC, RM-26-HC, RM-45-SD-HC, RM-49-HC	\$160
HS-5460	Flat Epoxy coated shelf, RM-65-HC Middle Section	RM-65-HC	\$230
HS-5461	Flat Epoxy coated shelf, RM-65-HC Right & Left Section	RM-65-HC	\$230
HS-5465	Organizer Shelf with Tracks, Middle Section	RM-65-HC	\$270
HS-5466	Organizer Shelf with Tracks, Right & Left Section	RM-65-HC	\$270

### BACK BAR ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5410	Complete Door Assembly-Solid, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$410
HS-5411	Complete Door Assembly-Solid, Left Hinge	All Back Bar and Direct Draw Models except DD24, BB80, BB80-G, DD80	\$410
HS-5412	Complete Door Left Section Assembly-Solid, Left Hinge 80"	BB80, BB80-G, DD80	\$410
HS-5413	Complete Door Assembly-Glass, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$840
HS-5414	Complete Door Assembly-Glass, Left Hinge	BB59, BB69, BB95, BB59-G, BB69-G, DD59, DD69, DD95	\$840
HS-5415	Complete Door Left Section Assembly-Glass, Left Hinge 80"	BB80, BB80-G, DD80	\$820
HS-5417	Flat Shelf, 59" & Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips	BB59, BB59-G, DD59, (Right Section) BB80, BB80-G, DD80	\$150
HS-5418	Flat Shelf, 69" & 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips	BB69, BB69-G, BB95, DD69, DD95, BB95-G	\$150
HS-5419	Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips	(Center) BB80, BB80-G, DD80	\$150
HS-5420	Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips	(Left Section) BB80, BB80-G, DD80	\$150
HS-5421	Set of 4 Pilasters 20.2"	All Back Bar and Direct Draw Models	\$150
HS-5515	Bottle Dividers for Back Bar Shelves, 6 Pack with 12 clips	BB59, BB69, BB80, BB95, BB59-G, BB69-G, BB80-G, B95-G	\$210
HS-5662	4" Casters with Shims (6pk)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95	\$410
HS-5663	4" Casters with Shims (4pk)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69	\$260

### ECONOMY SERIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5511	Flat Shelf Economy Series 1 Section Uprights with clips	Refrigerator, Freezer	\$360
HS-5512	Flat Shelf Economy Series 2 Section Uprights with clips	Refrigerator, Freezer	\$370


### MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-4007	Narrow drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Undercounters, Worktops, Prep Tables, Equipment Stands	\$70
HS-5534	12" Rail Divider Bar - Standard Pan Divider Bar for Pizza Prep Tables	Prep Tables	\$80

MISCELLANEOUS ACCESSORIES - CONTINUED

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5069	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back)	Sandwich Preps & Mega Top Prep Tables	\$40
HS-5280	Full Size Pan Adapter Bar for UR27B-8 Rail	Sandwich Preps	\$70
HS-5281	Full Size Pan Adapter Bar for SR36B-10 Rail	Sandwich Preps	\$70
HS-5476	Black kickplate for HR15A, HR15A-G	HR15A, HR15A-G	\$40
HS-5112	Stacking Kit - UR27B & UF27B	Undercounters	\$660
HS-5170	Stainless Steel Back Panel	Worktops, Sandwich Preps & Pizza Preps	\$910
HS-5184	All Mega Top divider front to back	Mega Top Prep Tables	\$70
HS-5185	All Mega Top & Sandwich Prep 27-8 divider side to side (outer)	Sandwich Preps & Mega Top Prep Tables	\$50
HS-5186	Mega Top 18M & 30M divider side to side (center)	Mega Top Prep Tables	\$50
HS-5187	Sandwich Prep 27-8 divider front to back	Sandwich Preps Preps	\$50
HS-5188	Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back	Sandwich Preps Preps	\$40
HS-5189	Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer)	Sandwich Preps Preps	\$50
HS-5190	Sandwich Prep 12 & 16 pan openings side to side (center)	Sandwich Preps Preps	\$50
HS-5191	Sandwich Prep 18 pan openings side to side (outer)	Sandwich Preps Preps	\$70
HS-5192	Sandwich Prep 18 pan openings side to side (center)	Sandwich Preps Preps	\$60
HS-5453	Heated Condensate Pan Kit	≥46" Undercounter, Worktop and Preps	\$640
HS-5462	Heated Condensate Pan	Steelheart® Uprights	\$680
HS-5525	Stainless Steel Rear Panel for 2 Section Upright, (factory installed only)	Steelheart® Uprights	\$2,460
HS-5526	Stainless Steel Rear Panel for 1 Section Upright, (factory installed only)	Steelheart® Uprights	\$1,280
HS-5496	Stainless Steel Rear Panel for DT1A (factory installed only)	Steelheart® Uprights	\$1,280
HS-5497	Stainless Steel Rear Panel for DT2A (factory installed only)	Steelheart® Uprights	\$2,460
HS-5449	14" cutting board brackets	SR48, 60 A-Series	\$180
HS-5585	14" cutting boards Brackets	SR48B & SR60B Models	\$180
HS-5601	Dual Rear Cutting board	SR60B-18M	\$620
HS-5626	Stainless Steel Panel Overlay Kit	48" B Series Refrigerator and Freezers, Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$390
HS-5620	Stainless Steel Panel Overlay Kit	27" B Series Refrigerator Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$270
HS-5621	Stainless Steel Panel Overlay Kit	UR27B-GLP01 Refrigerator Undercounter - FACTORY INSTALLED	\$220
HS-5622	Stainless Steel Panel Overlay Kit	27" B Series Freezer Undercounter and Worktop Models - FACTORY INSTALLED	\$330
HS-5624	Stainless Steel Panel Overlay Kit	UF27B-GLP01 Freezer Undercounter - FACTORY INSTALLED	\$360
HS-5625	Stainless Steel Panel Overlay Kit	36" B Series Undercounter and Worktop Refrigerator Models - FACTORY INSTALLED	\$410
HS-5627	Stainless Steel Panel Overlay Kit	UR48B-GLP01 Refrigerator Undercounter - FACTORY INSTALLED	\$450
HS-5628	Stainless Steel Panel Overlay Kit	72" B Series Refrigerator Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$550
HS-5630	Stainless Steel Panel Overlay Kit	60" B Series Refrigerator and Freezer Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$470
HS-5611	Stainless Steel Panel Overlay Kit	60" B Series Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$420
HS-5651	Rail Dividers for 1/6 size pans	PR46B	\$140
HS-5652	Rail Dividers for 1/6 size pans	PR60B	\$140
HS-5653	Rail Dividers for 1/6 size pans	PR67B	\$140
HS-5654	Rail Dividers for 1/6 size pans	PR93B	\$140
HS-5692	Drawer Dividers	PR60B	\$70
HS-5693	Drawer Dividers	PR46B, PR67B, PR93B	\$70
HS-5518	Narrow Dividers for Rubbermaid Pans	SR27B-8, SR27B-D2, SR48B-8, SR60B-8 models	\$50
HS-5519	Narrow Dividers for Rubbermaid Pans	SR27B-12M, SR27B-12MD2, SR48B-12, SR48B-12M, SR48B-12D2, SR48B-12D4, SR60B-12, SR60B-12M, SR72B-12, SR72B-12M models	\$80
HS-5521	Narrow Dividers for Rubbermaid Pans	SR60B-16, SR72B-16 models	\$160
HS-5522	Narrow Dividers for Rubbermaid Pans	SR72B-18, SR60B-18M, SR72B-18M, SR48B-18MD4	\$130
HS-5655	Epoxy-Coated Wine Shelf	Steelheart® Single Section (1 pk)	\$450
HS-5656	Stainless Steel Wine Shelf	Steelheart® Single Section (1 pk)	\$750
HS-5691	Pizza Prep Table: Horizontal drawer divider bar	Pizza Prep 46", 67, & 93" models	\$30

# MODEL NUMBER IDENTIFICATION | ICE

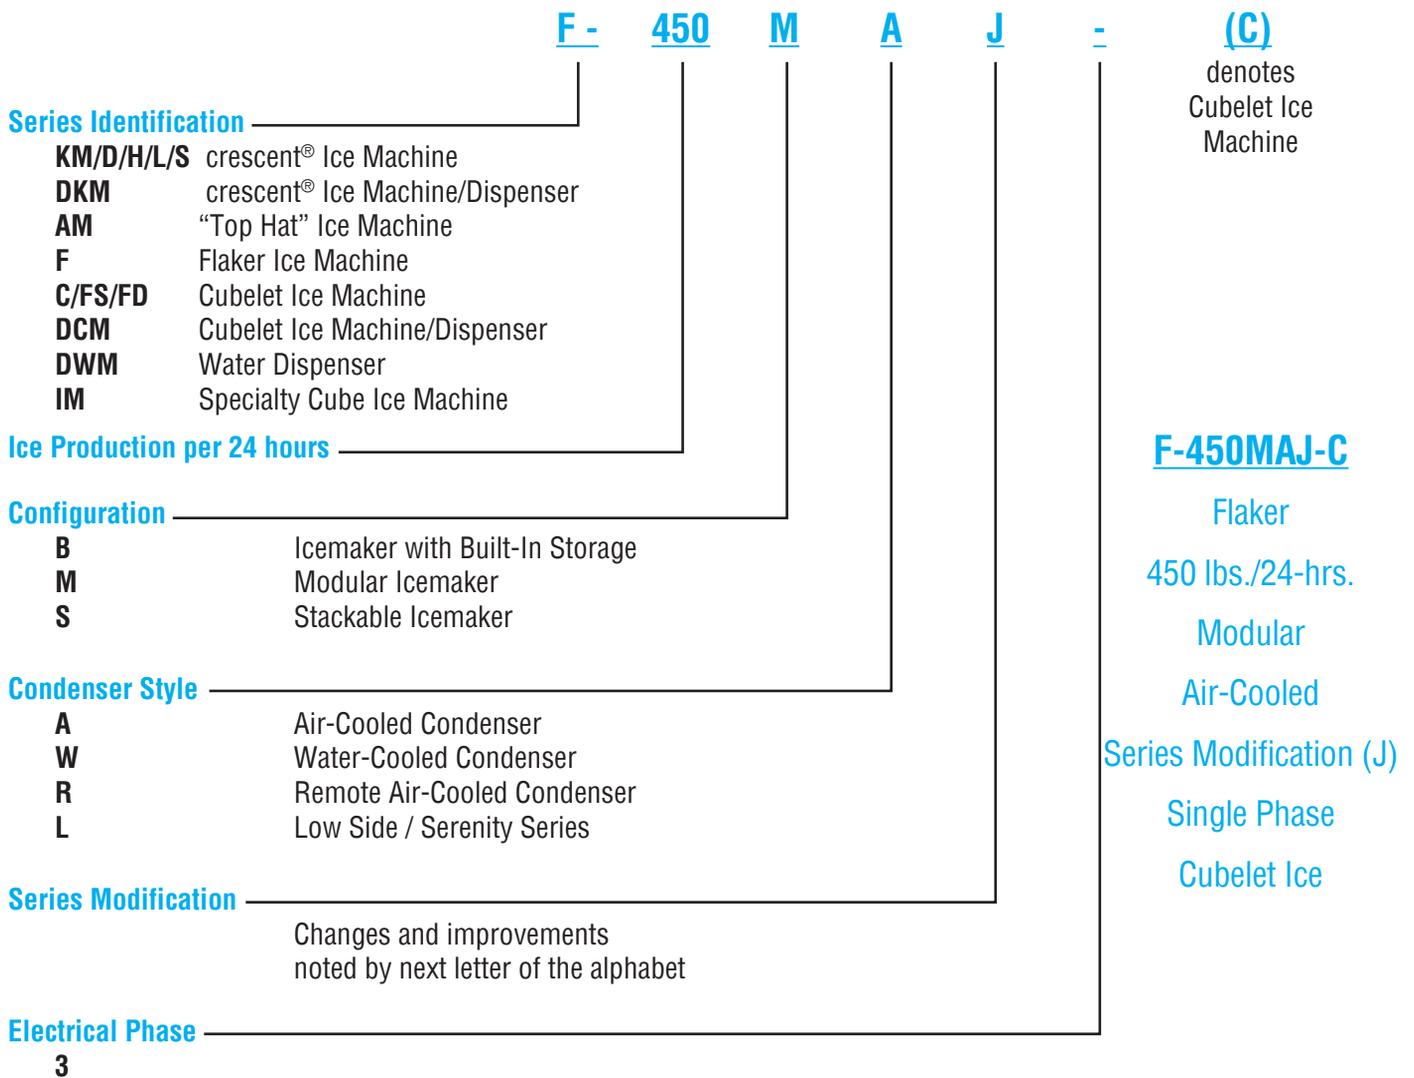

# MODEL NUMBER IDENTIFICATION | REACH-INS

## HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 A - 18MD2

- Series Identification
- U** Undercounter
  - W** Worktop
  - S** Sandwich Prep/Mega Top
  - P** Pizza Prep
  - C** Chef Base
- Model Identification
- R** Refrigerator
  - F** Freezer
- Unit Width
- ##** In Inches
- Series Modification
- A** Alphabetically increases per model revisions
- Options Configuration
- LP / -D** Low Profile / Drawers
  - # / -D#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Sandwich Prep
  - #M/ -#MD#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Mega Top
  - 01** Unit with Cylinder Lock

**SR48A-18MD2**

Mega Top Prep Table,  
Refrigerator,  
48" Wide,  
Revision A\*,

(18) 1/6 Sized Pan Capacity in Rail,  
Door and 2 Drawers\*

\*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.



## UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS - FS  
PT & RT ONLY

- Model Identification
- R** Refrigerator
  - F** Freezer
  - DT** Dual Temp
  - PT** Pass Thru
  - RN** Roll In
  - RT** Roll Thru
- Number of Sections
- 1 / 2 / 3** One, Two, or Three Sections
- Series Modification
- A** Alphabetically increases per model revisions
- Door Configuration
- FS / -HS** Full Height or Half Height Stainless Door
  - FG / -HG** Full Height or Half Height Glass Door
  - FSL / -HSL** Full Height or Half Height Stainless Door, Left-Hand Hinge

**RIA-FS**

Upright Refrigerator,  
One Section  
Revision A\*,

Full Stainless Door

\*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.





# HOSHIZAKI

## SERVICE & SUPPORT

Whether you need product resources, technical support, or service assistance, Hoshizaki's support team is ready to help.

Explore our tools and resources to keep your equipment running at peak performance.

### Registration & Warranty



Register your equipment to activate your warranty and access product information.



### Manuals & Guides



Access product manuals, spec sheets, and warranty statements for current and previous models.



### Parts Manual Lookup



Browse interactive parts diagrams to identify the right parts for your products.



### Training & FAQs



Explore our in-person and virtual training classes, or browse FAQs.



### Find a Service Rep



Need maintenance or repairs? Locate an authorized Hoshizaki service representative near you.



### KCL CAD / Revit Files



Access CAD and Revit files for Hoshizaki equipment to streamline your design and planning process.



### Technical Support Videos



View essential technical training focused on operations and diagnostics of Hoshizaki equipment.



# WARRANTY

Below are general warranty terms for currently produced units and do not represent the full scope or terms of the manufacturer's warranty. Product lines listed below are for reference and list is not intended to be fully-inclusive of all models warrantied.

For specific terms and warranty [Lookup by Model](#) or [Serial Number](#) please visit: [www.hoshizakiamerica.com/support/warranty](http://www.hoshizakiamerica.com/support/warranty)



Scan for Warranty information

## TERMS and CONDITIONS

**TERMS:** Terms are such as the company may extend to the purchaser.

**LOST OR DAMAGED SHIPMENTS:** Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

## ICE MACHINE WARRANTIES

All units to be free from manufacturing defects, covered by:

**KMEdge™ Series Cubers, Ice Machine & Dispenser and DB/DM Hotel/Motel Dispensers**

- 3-Year - Parts & Labor on Entire Machine
- 5-Year - Parts & Labor on Evaporator,
- 5-Year - Parts on Compressor, Air-Cooled Condenser Coil

**AM-50 Series Cubers & C-80 Flakers**

- 2-Year - Parts & Labor on Entire Machine

**IM Series Cubers (Specialty Ice)**

- 3-Year - Parts & Labor on Entire Machine
- 5-Year - Parts on Compressor and Air-Cooled Condenser Coil

**Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers**

- 3-Year - Parts & Labor on Entire Machine
- 5-Year - Parts on Compressor and Air-Cooled Condenser Coil

**Bins**

- 3-Year - Parts & Labor on Bins <1,000lbs. storage
- 5-Year - Parts & Labor on iBns >1,000lbs. storage

**Accessories**

- 90 Day - Parts only
- 1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor
- 1-Year - Water Filter System & Replaceable Elements

## REACH-IN WARRANTIES

All units to be free from manufacturing defects, covered by:

**Steelheart® Series Refrigerators & Freezers**

- 7-Year - Labor on Entire Machine
- 7-Year - Parts on Entire Machine
- 7-year - Parts on Compressor

**Compact Undercounter Refrigerators, HR-Series & Back Bar Refrigerators & Glass Door Merchandisers**

- 3-Year - Parts & Labor on Entire Machine
- 5-Year - Parts on Compressor

**Valiance® Refrigeration Series**

- 3-Year - Labor on entire machine
- 4-Year - Parts on entire machine
- 5-year - Parts on Compressor

**Countertop Refrigerated Display Cases (Sushi)**

- 1-Year - Parts & Labor on Entire Machine
- 2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser
- 5-Year - Parts on Compressor, Air-Cooled Condenser

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact factory for warranty in other countries. Refer to manufacturer's full warranty for complete details.



# HOSHIZAKI

HOSHIZAKI AMERICA, INC.



## HOSHIZAKI ALLIANCE

EXCELLENCE  
ACROSS THE  
AMERICAS



**LANCER** **MACOM** **FOGEL**

HOSHIZAKI AMERICA INC., is a proud member of The Hoshizaki Alliance, a group of sister-companies Equipping People with Total Foodservice Solutions Through Trust, Quality, and Connection Across the Americas

HOSHIZAKI AMERICA, INC.  
618 Highway 74 South, Peachtree City, GA 30269  
Toll Free: (800) 438-6087 | Fax: (800) 345-1325  
[www.hoshizakiamerica.com](http://www.hoshizakiamerica.com)