



Griddle Stands

REFRIGERATORS & FREEZERS



Continental[®]
Refrigerator

INNOVATIVE DESIGNS FOR YOUR FOODSERVICE NEEDS

Griddle Stands

Refrigerator & Freezer

Griddle Stands are available in 7 sizes for refrigerators and 4 sizes for freezers. All models are front breathing and come standard with stainless steel interior, exterior and rear. All drawers are fully extendable and designed to hold 6-inch deep pans side-by-side and provide a 250 lb. capacity. Griddle Stands come equipped with heavy-duty drawer tracks that have built-in drawer safety clips.

Functionality

Griddle Stands come standard with a drip guard marine edge top, providing a cleaner and safer kitchen. *Flat top also available.*

Performance & Reliability

Performance-run tested for a minimum of 12 hours providing a highly sophisticated temperature analysis recording, exclusive to each cabinet.



FLEXIBILITY

Modifications Made Easy.

At Continental Refrigerator, we know the foodservice industry is an ever-changing environment. We are reminded of this every day through feedback from our customers, both directly and through our network of representatives. In fact, customer feedback has often lead to our custom engineering modifications becoming standard product features.

For this reason, we pride ourselves in delivering feature-rich refrigeration equipment solutions designed specifically for the commercial foodservice market. Whether it's kitchen ambient, food safety, limited space or storage challenges, our products are packed with flexible options that provide **real** operator benefits out of the box. This flexibility, a key differentiator of our products, enables our customers to modify base product features strategic to the way they operate their kitchen or bar environment.

Shown: D72GN

Standard Model



Condensing Unit on Left



16-Gauge Stainless Steel Top
(flat or marine edge)



Top Extensions



Adjustable Stainless Steel Legs



Heat Shield (shown cutaway)

Consult factory for other modifications

Standard Features, Specifications & Drawer Pan Configurations

Standard Features

Performance-rated refrigeration system

Natural, Environmentally-safe, high-efficiency R-290 refrigerant (Refrigerators)

High density, non-CFC/non-HFC polyurethane foamed-in-place insulation

Smooth, polished chrome drawer handles

Easy glide, fully extendable drawers

One-piece, snap-in magnetic drawer gaskets

Heavy-duty drawer track with built-in drawer safety clips

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, front slide-out condensing unit

Stainless steel finished worktop with drip guard marine edge

Electronic controller w/ digital display & hi-low alarm

Expansion valve system (except 36" - 48" refrigerators & 48" freezers)

4" casters on support plates

Stainless steel case back

Automatic electric defrost (freezers)


Specifications

Refrigerators & Freezers

BTU/HR Rating @ +25°F, 90°F ambient (refrigerators)
BTU/HR Rating @ -15°F, 90°F ambient (freezers)
10 ft. cord and plug attached (115-60-1 volts)

SIZE	REF.	FREEZERS	EXTERIOR DIMENSIONS (IN.) W x D x H	MAX. TOP WEIGHT CAPACITY (LBS.)	CAPACITY BTU/HR*	H.P.	SHIP WEIGHT
36"	D36GN	not available	36 x 34 3/4 x 26 3/8	600	1620	1/5	360
48"	D48GN	-	48 x 34 3/4 x 26 3/8	775	1620	1/5	450
	-	D48GFN	48 x 34 3/4 x 26 3/8	775	1250	1/4	475
60"	D60GN	-	60 x 34 3/4 x 26 3/8	1000	2610	1/4+	495
	-	D60GFN	60 x 34 3/4 x 26 3/8	1000	1590	1/3	520
72"	D72GN	-	72 x 34 3/4 x 26 3/8	1200	2610	1/4+	550
	-	D72GFN	72 x 34 3/4 x 26 3/8	1200	1590	1/3	575
84"	D84GN	-	84 x 34 3/4 x 26 3/8	1400	2610	1/4+	605
	-	D84GFN	84 x 34 3/4 x 26 3/8	1400	2470	1/2	640
96"	D96GN	not available	96 x 34 3/4 x 26 3/8	1400	2610	1/4+	670
108"	D108GN	not available	108 x 34 3/4 x 26 3/8	1400	3100	1/4+	760

Drawer Pan Configurations

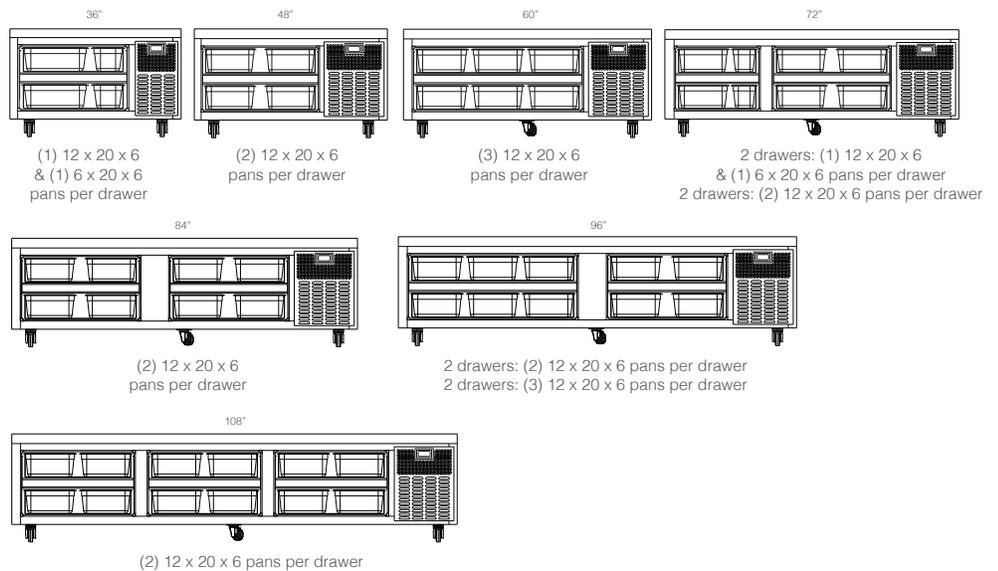

Drawer cage, easily removable in field for servicing & cleaning



Mullion, integral to the cage

- Door in lieu of drawers (D36GN & D48GN only)
- Cylinder locks
- Top extensions (flat or marine edge)
- Condensing unit on left
- Integral heat shield top
- 16-gauge stainless steel top (marine or flat) (except 108" models)
- Flat top



Top extensions (flat edge)




Integral heat shield top (cut away for viewing purposes)



Cylinder locks

Engineering, Manufacturing & Quality Control

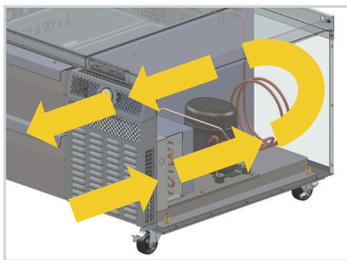


View of front breathing air flow

Continental Refrigerator engineers and builds our Griddle Stands to meet the most stringent specifications demanded by consultants and service operators. All cabinets are constructed of top quality materials and components, attributing to their genuine ruggedness and durability. Our Griddle Stands are designed with enhancements to endure everyday use in typical commercial kitchen environments.

Front Breathing Air Flow

Intake air is drawn through the louvers at the bottom half of the front grill, and then through the condenser coil. Unique forced air design utilizes fans across the back of the unit for even distribution of cold. In cases where the rear of the unit is blocked, the air is forced to discharge through the holes at the top half of the front grill.

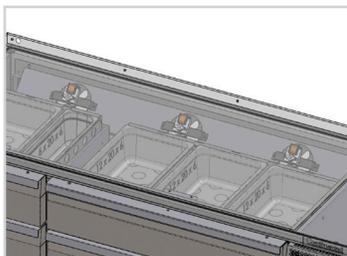

View of fans on D84GN model

Prior to factory shipping, all models are performance-run tested for a minimum of 12 hours, providing a highly sophisticated temperature analysis recording, exclusive to each individual cabinet. This recording is then supplied, along with the unit's operation manual, for the customer. A final leak test, vibration check, noise level and visual examination is made by our quality control team, to assure a superior product is shipped from our factory.

Number of Fans

D36GN	1	
D48GN	1	D48GFN 2
D60GN	2	D60GFN 2
D72GN	2	D72GFN 2
D84GN	3	D84GFN 4
D96GN	3	
D108GN	3	

Product design and specifications are subject to change without prior notice.

How to Buy

LOCAL SALES REPRESENTATIVES			STATES COVERED
Wyllie Marketing	Weymouth, MA	(781) 340-6157	ME, RI, NH, MA, VT, CT
Link 2 Hospitality Solutions	Rochester, NY	(585) 254-1780	Upstate NY
Pecinka Ferri Associates	Fairfield, NJ	(973) 812-4277	N. NJ, New York City
Schmid Dewland & Associates	Marlton, NJ	(856) 783-3400	E. PA, DE, S. & Central NJ
Link 2 Hospitality Solutions	Bridgeville, PA	(412) 341-2020	W. PA, W. VA (except Panhandle)
High Sabatino Associates, Inc.	Jessup, MD	(301) 470-7051	DC, MD, VA, W. VA (Panhandle)
Stiefel Associates, Inc.	Lansing, MI	(517) 393-3019	MI (except Upper Peninsula)
Alliance Foodservice Equipment	Pickerington, OH	(800) 833-0797	OH, KY
Stiefel Associates, Inc.	Edinburgh, IN	(800) 832-6442	IN
Jay Mark Group, LTD	Elk Grove Village, IL	(847) 545-1918	N. IL
North Star Agency	Minneapolis, MN	(763) 545-1400	MN, ND, SD
Mirkovich & Associates	Waukesha, WI	(630) 792-0080	WI, MI (Upper Peninsula)
Select Marketing	St. Louis, MO	(314) 961-3332	MO, KS, IA, NE, S. IL
Premier Foodservice Group	Norcross, GA	(877) 667-2192	NC, SC
Pro-Quip Foodservice	Little Rock, AR	(501) 221-7120	AR, LA, MS, W. TN (W. of Tenn. River)
The Veitch Group	Ft. Lauderdale, FL	(954) 316-6162	FL (except Panhandle)
Merkolat	Pembroke Pines, FL	(864) 248-6260	Latin America, Caribbean
Premier Foodservice Group	Norcross, GA	(877) 667-2192	AL, FL (Panhandle), GA, E. TN (E. of Tenn River)
Desert Peak Marketing	Denver, CO	(303) 790-2424	CO, S. ID, MT, UT WY
Roller & Associates	Seattle, WA	(206) 547-3555	WA, OR, AK, N. ID
Foodservice Equipment Agents	Placentia, CA	(714) 693-3329	AZ (Bull Head City), S. CA, S. NV
Inform Foodservice Solutions	Walnut Creek, CA	(800) 655-7756	N. CA, N. NV
Wickersham Marketing	Kealahou, HI	(808) 315-2077	HI
Desert Peak Marketing	Phoenix, AZ	(602) 255-0976	AZ (except Bull Head City), NM, TX (El Paso)
Forbes Hever & Wallace, Inc.	Coppell, TX	(972) 219-8898	OK, TX (except El Paso)



A Division of National Refrigeration & Air Conditioning Products

Continental Refrigerator | Local: (215) 244-1400
539 Dunksferry Road | Toll Free: (800) 523-7138
Bensalem, PA 19020 | Fax: (215) 244-9579

www.continentalrefrigerator.com

Continental[®]

Refrigerator

INNOVATIVE DESIGNS FOR YOUR FOODSERVICE NEEDS



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.