

E61 – JUBILE

FAEMA
THE ART MACHINE

MODEL: _____ SKU: _____
FAEMA E61 JUBILE Auto 1grp A1110QIBT999A
FAEMA E61 JUBILE Auto 2grp A1210QIBT999A

DATE _____
PROJECT _____
LOCATION _____

A PERFORMANCE
AND STYLE ICON.

E61 Jubilé



Automatic,
dosed hot water and
beverage selections.

WHITE WOOD



CHROME



FEATURES



Built in volumetric pump, two pressure gauges



Adjustable thermal balancing system (Faema patent)



2 manual steam wands



Hot water wand

E61, THE STORY CONTINUES

It is 1961 and Faema writes an important page in its own history and in that of espresso coffee machines by introducing the E61. Faema presents a new edition of its jewel. Though built maintaining the original design and materials, E61 includes updated features: an automatic boiler fill, a built-in volumetric pump, two pressure gauges, to control the pump and the boiler pressure, and the adjustable thermal balancing system (FAEMA patent). E61 Jubilé features dosed hot water and beverage selections.

Why is it so special

E61 is the first machine to use a volumetric pump to give the water the ideal 9-atmosphere pressure and keep the pressure constant during the whole extraction process, unlike lever machines. Furthermore, thanks to the preinfusion system, the extension of the contact time between the water and the ground coffee before extraction favours optimal extraction when it comes to the organoleptic properties of the espresso.

The shape of the myth

Though built maintaining the original design and materials, E61 features updated devices linked to its revolutionary technical solutions and its stainless steel elegant body.

Innovative technical solutions, pure steel body work and elegant back-illuminated glass design.





E61 Jubilé




Automatic-1 Group



Automatic-2 Group

WOOD DETAILS AVAILABLE FOR
WHITE MODEL WOOD ONLY

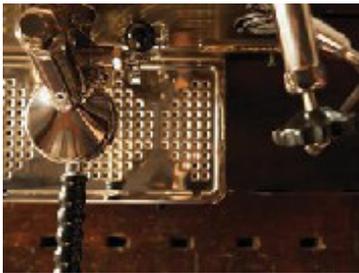

E61 updated features linked to its revolutionary technical solutions and its stainless steel elegant body.

Fully Automatic, dosed hot water and beverage selections.



E61-LEGEND	1 Group	2 Group
Features		
Steam wands	2	2
Hot water wands	1	1
Hot water selections	-	-
Boiler capacity (L)	6	11
Electric cup warmer (3-temp settings)	-	-
Technical Information		
Dimensions: W x D x H (in)	21.9 x 21.3 x 26.5	28.1 x 21.3 x 26.5
Weight (lbs)	112.4	132
Power at 220-240V~ 60Hz (W)	2900-3900	4200-5600

Water & Drain Line Requirements

Cold Water Line:

3/8" dedicated cold water line with shut-off valve and compression fitting.

Water Flow:

Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/5 Bar. Should flow pressure exceed 70 PSI, a pressure reducer is necessary.

Drain:

Open gravity drain of minimum 2" ID size for hose, within 4 feet of machine.

Access Hole:

There must be a 4" access hole underneath the machine to connect the water, drain and power supply. See CAD drawings for recommended hole placement.



Espresso Soci, Inc. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice for misprints and other errors. There may be color deviations due to the printing process.

E61 Jubilé

Receptacle



NEMA L6-30R

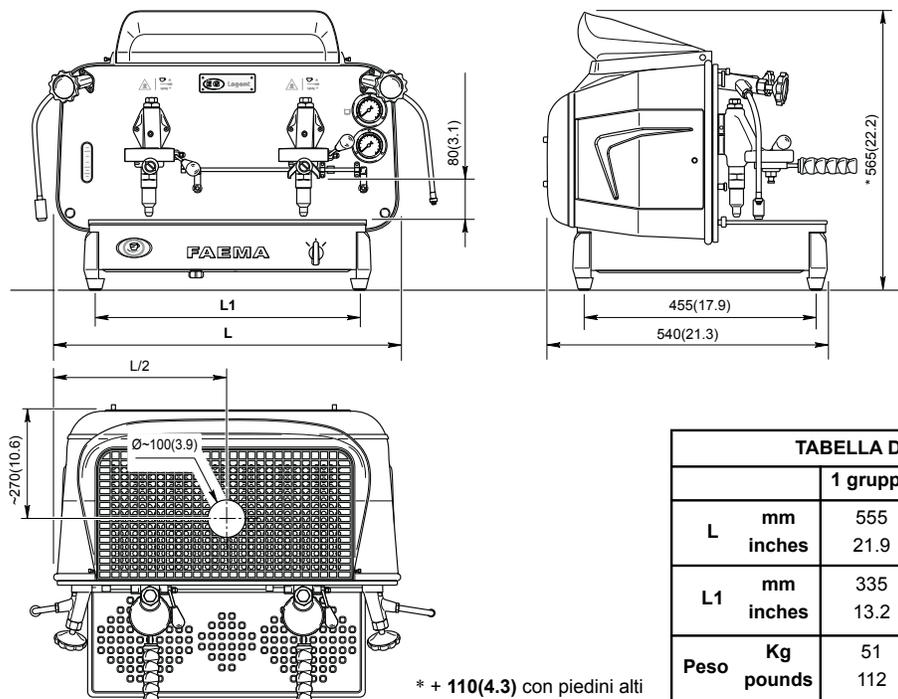


TABELLA DIMENSIONI				
		1 gruppo	2 gruppi	3 gruppi
L	mm	555	715	955
	inches	21.9	28.1	37.6
L1	mm	335	495	735
	inches	13.2	19.5	28.9
Peso	Kg	51	60	80
	pounds	112	132	176

	ALIMENTAZIONE ELETTRICA	POTENZA INSTALLATA	CORRENTE DI LINEA	SEZIONE CAVO DI ALIMENTAZIONE
Macchina 1 GRUPPO	380-415V3N 50/60Hz	3.3-3.9 kW	6A (3N)	5Gx2.5mm ²
	208-240V 60Hz	2.9-3.9 kW	16A (spina da 30A)	12/3 AWG
	-	-	-	-
Macchina 2 GRUPPI	380-415V3N 50/60Hz	4-4.8 kW	8A (3N)	5Gx2.5mm ²
	208-240V 60Hz	4.2-5.6 kW	23A (spina da 30A)	12/3 AWG
	208-240V 60Hz	5.25-7.05 kW	30A (spina da 50A)	8/3 AWG
Macchina 3 GRUPPI	380-415V3N 50/60Hz	4.8-5.7 kW	9A (3N)	5Gx2.5mm ²
	208-240V 60Hz	5.2-7 kW	30A (spina da 50A)	8/3 AWG
	208-240V 60Hz	6.1-8.15 kW	34A (spina da 50A)	8/3 AWG

INTERRUTTORE - Omnipolare con distanza di apertura contatti 3mm
 - Protezione da corrente di dispersione con valore pari a 30 mA

MESSA A TERRA - Obbligatoria

PRESSIONE DI ALIMENTAZIONE IDRAULICA - 0 ÷ 6 bar

ALLACCIAMENTO IDRAULICO - ø 3/8 gas

SCARICO IDRAULICO - ø min. 50mm