

X20

FAEMA
THE ART MACHINE

MODEL:

Faema X20 S10 with Auto Steam
Faema X20 CP10 Milk PS with Auto Steam
Faema X20 CS10 Milk PS with Soluble Hopper

SKU:

D8ARLS9BT999A
D8BRLS9BT999A
D8RMLS9BT999A

DATE

PROJECT

LOCATION

An ideal solution for locations that produce around 200 cups a day.

X20



The perfect coffee break

FEATURES



Up to 200 cups/day



Heated Metal Brew Group



Hot Frothed Milk



Autosteam
Cold Touch



Capacitive
Touchscreen Panel



AWS—Automatic
Washing System



Eco-Friendly



USB Port



Connectivity



Cup4You



The X20 features a Power Station mode for simultaneous supply of milk-based beverages from two adjacent machines, using only one fridge and thus optimizing the work space.





New Titanium Grinders

Made of K110 steel with a PVD coating, are very robust and designed to last for a long time.



SMARTBOILER

One copper boiler with 2.0L capacity and a heat exchanger of 230 ml. 2.600W new resistance SmartBoiler function. Guarantees high performance for hot water and steam.



Hoppers and Solubles

Dual 1/1.2 kilo bean hoppers allow for multiple blends of coffee to be served. The X20 CS10 with its integrated soluble chocolate system provides the optimal way to expand your menu, delight your guests, and increase your revenue and profitability.



The Faema X20 will transform your coffee program into a way of delighting your guests that separates you from your competition, and keeps them coming back for more phenomenal coffee.



Be sure to tell us if your machine will be self-serve/customer facing or operated by your staff. If it's customer facing, we'll turn off and remove the steam arm before it ships. This will ensure that your guests can't be burned by the steam arm.

X20	S10 + CP10	CS10
Features		
Steam wands	1	1
Auto steam wands	1	-
Hot water wands	1	1
Hot water selections	2	2
Boiler × Boiler capacity (L)	1 × 2.6 L	1 × 2.6 L
Coffee dosing grinders	2	2
Coffee bean hopper × capacity (kg)	2 × 1.2	2 × 1.2
Solubles hopper × capacity (kg)	-	1 × 1
Technical Information		
Dimensions: W × D × H (in)	14.6 × 24.4 × 30	14.6 × 24.4 × 30
Weight (lbs)	157	157
Power at 220-240V~60Hz (W)	3400	3400

Water & Drain Line Requirements

Cold Water Line:

$\frac{3}{8}$ " dedicated cold water line with shut-off valve and compression fitting.

Water Flow:

Minimum incoming water flow rate of 35 GPH and maximum line pressure 70PSI/5 Bar. Should flow pressure exceed 70 PSI, a pressure reducer is necessary.

Drain:

Open gravity drain of minimum 2" ID size for hose, within 4 feet of machine.


Access Hole:


There must be a 4" access hole underneath the machine to connect the water, drain and power supply. See CAD drawings for recommended hole placement.



Espresso Soci, Inc. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice for misprints and other errors. There may be color deviations due to the printing process.

X20



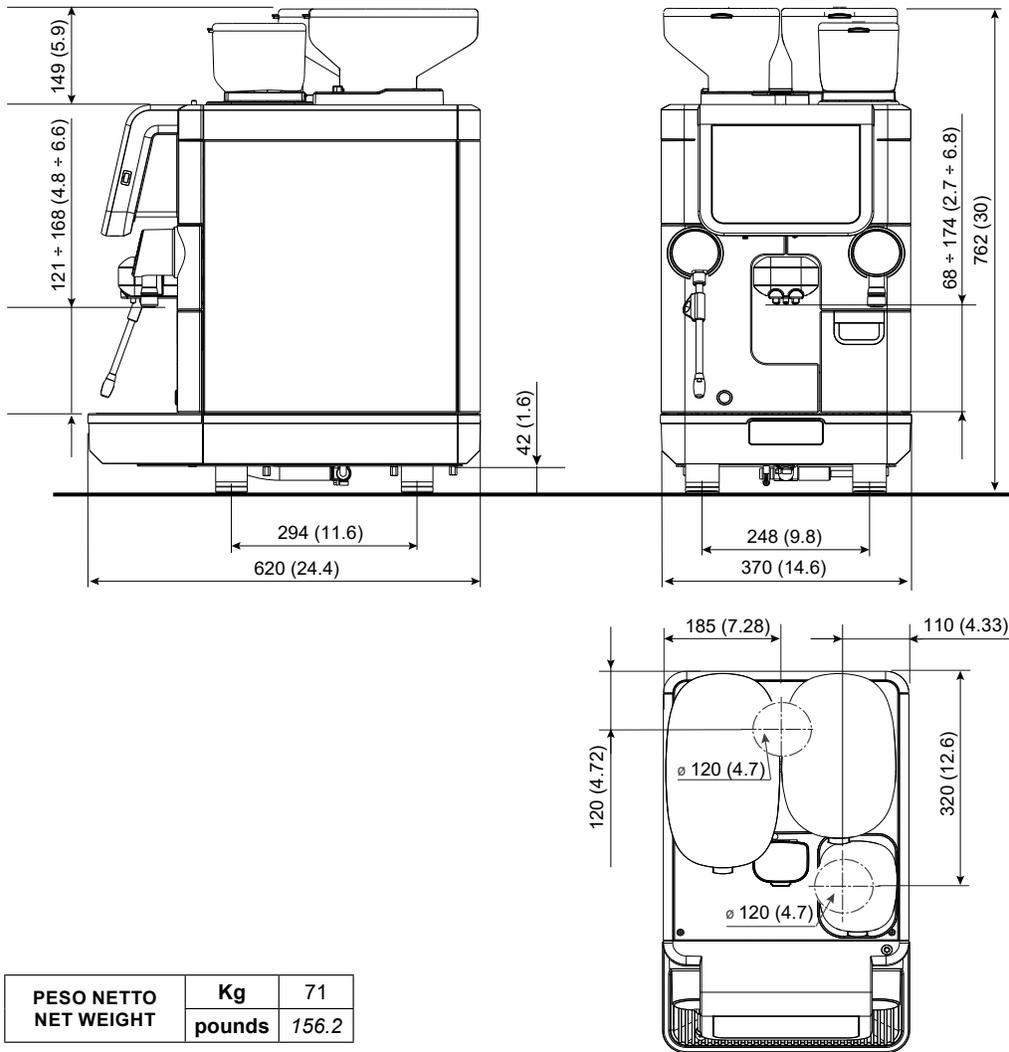

PESO NETTO NET WEIGHT	Kg	71
	pounds	156.2

MACCHINA MACHINE	ALIMENTAZIONE ELETTRICA POWER SUPPLY	POTENZA INSTALLATA INSTALLED POWER	CORRENTE DI LINEA LINE POWER	SEZIONE CAVO ALIMENTAZIONE SUPPLY CABLE SECTION
X20	220 - 240 V 50 Hz 220 V 60 Hz	3.2 - 3.8 kW 3.4 kW	16 A	3 x 1,5 mm ²
	220 - 240 V 50 Hz 220 V 60 Hz	2.6 - 3.1 kW 2.8 kW	13 A	3 x 1,5 mm ²
	220 - 240 V 50 Hz 220 V 60 Hz	2.4 - 2.7 kW 2.5 kW	12 A	3 x 1,5 mm ²
	208-240 60 Hz	3.0-3.8 kW	16 A (30 A plug)	3 x 12 AWG
	200 V 50/60 Hz	2.7 kW	14 A	3 x 2 mm ²

INTERRUTTORE	- Omnipolare con distanza di apertura contatti 3 mm - Protezione da corrente di dispersione con valore pari a 30 mA	SWITCH	- Omnipolar, 3 mm opening contact distance - Protection from leakage current with a value equal to 30 mA
MESSA A TERRA	- Obbligatoria	GROUNDING	- Required
ALLACCIAMENTO IDRAULICO	- \varnothing 3/8 gas	HYDRAULIC CONNECTION	- \varnothing 3/8 gas
PRESSIONE DI ALIMENTAZIONE IDRAULICA	- 1 ÷ 6 bar (0.6 MPa)	HYDRAULIC FEEDING PRESSURE	- 1 ÷ 6 bar (0.6 MPa)
SCARICO IDRAULICO	- \varnothing min. 50 mm	WATER DISCHARGE	- \varnothing min. 50 mm

rev. 2205