




# What's **New** at Krowne



## Groundbreaking Two-Year, Expansion Plan:

Transforming operations with technology and setting new industry standards.

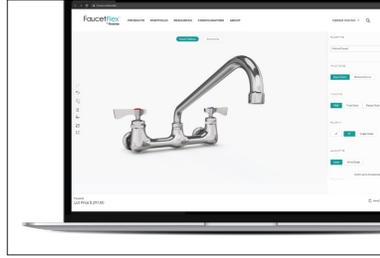

## FaucetFlex configurator:

Presents a modernized platform that offers users the ability to create and manage various faucet features and offers easy integration and analytics for future use.




## Self-Contained Electronic Sensor Faucet:

Options offer modern, hygienic, touchless design operation that enhances sanitation and user convenience while eliminating bulky control modules.

## Crossover Search tool finds compatible replacement parts for businesses equipment:

Crossover Search tool is an easy-to-use and interactive way to match quality Krowne products to competitors' faucets and repair parts.

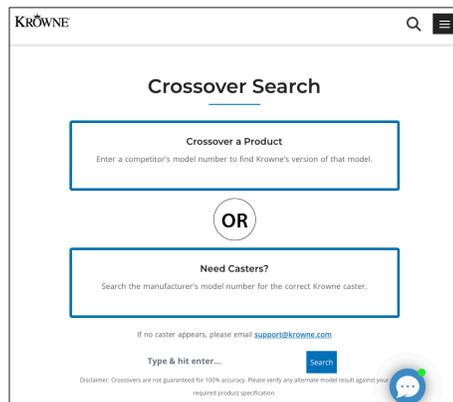

KROWNE




## Our new line Krowne Pet:

Innovative pet-friendly fixtures designed to enhance convenience for pet owners and groomers everywhere.



Innovation Lab

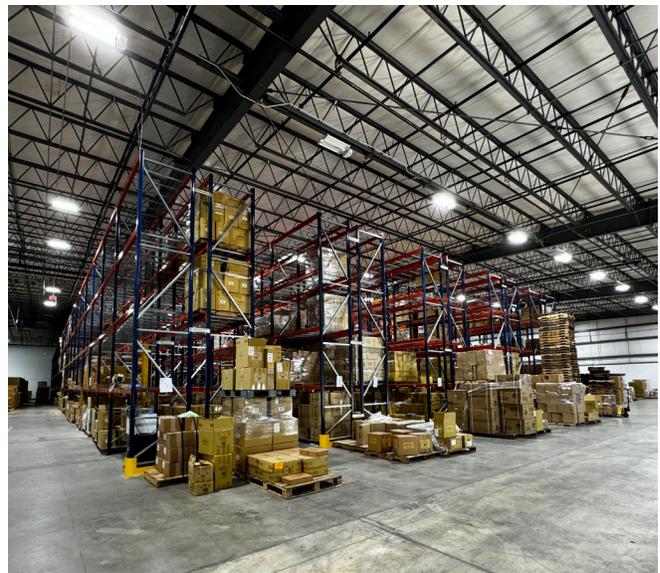

Distribution Center

<b>Displays</b>	Freestanding & Combo Displays	<b>4</b>
<b>FaucetFlex®</b>	FaucetFlex QR Code	<b>6</b>
<b>Home Collection</b>	Introduction & Warranty	<b>8</b>
	Single Handle Kitchen Faucets	<b>9</b>
	Goose Neck Drinking Water Dispensers	<b>10</b>
	Deck Mount Soap Dispensers	<b>11</b>
	Garbage Disposal Air Switches	<b>11</b>
<b>Diamond Series Plumbing</b>	Pre-Rinse Units	<b>14</b>
	Pre-Rinse Units	<b>15</b>
	Pre-Rinse Replacement Parts	<b>16</b>
	Faucets	<b>17</b>
	Replacement Parts	<b>18</b>
	Electronic Faucets   Ball Valves   Waste Drains	<b>19</b>
<b>Royal Series Pre-Rinse Units</b>	Pre-Rinse Features	<b>21</b>
	Pre-Rinse Units	<b>22</b>
	ShelfMaster Pre-Rinse	<b>26</b>
	Space Saver Pre-Rinse	<b>27</b>
	Pre-Rinse Replacement Parts	<b>28</b>
<b>Royal Series Plumbing</b>	Faucets	<b>31</b>
	Flexible Water Line & Faucet Mounting Kits	<b>43</b>
	Replacement Valves & Handles	<b>44</b>
	Coupling Flanges & Adapters	<b>45</b>
	Spouts	<b>46</b>
	Adapters & Vacuum Breakers	<b>47</b>
	Lavatory Faucets	<b>48</b>
	Aerators/Outlets	<b>53</b>
	Electronic Sensor Faucets	<b>55</b>
	Electronic Faucet Replacement Parts	<b>59</b>
<b>Silver Series Plumbing</b>	Faucets	<b>61</b>
	Replacement Parts	<b>66</b>

<b>Drains</b>	Waste Drains	<b>69</b>
	Waste Drain Replacement Parts	<b>71</b>
	Overflow Pipes	<b>73</b>
<b>Specialty Products</b>	Grease Filters	<b>75</b>
	Water Filters	<b>76</b>
	Pet Collection	<b>77</b>
	Pet Collection Replacement Parts	<b>78</b>
	Wok Faucets	<b>78</b>
	Utility Sprays	<b>79</b>
	Pot Fillers	<b>81</b>
	Test Strips	<b>82</b>
	Wobble Wedges	<b>82</b>
	Cooking Accessories	<b>82</b>
	Foodservice Accessories	<b>83</b>
	Ice & Water Service Station Accessories	<b>85</b>
	Drop-In Ice Bins	<b>86</b>
	Glass Rinsers	<b>87</b>
	<b>Hand Sinks</b>	Standard Hand Sinks
12"W Hand Sinks		<b>93</b>
9"W Space Saver Hand Sinks		<b>96</b>
Hand Sinks Parts & Accessories		<b>97</b>
One Compartment Drop-In Sinks		<b>99</b>
Multiple Compartment Sinks		<b>100</b>
Specialty Sinks on Legs		<b>100</b>
Commercial Sinks		<b>102</b>
Drop-in Counter Top Installed Hand Sink		<b>104</b>
Sink Strainers		<b>104</b>
Floor Strainers	<b>104</b>	
<b>Gas Connectors</b>	Movable Complete Kits	<b>105</b>
	Gas Connector Parts & Accessories	<b>110</b>
	Stationary Gas Connectors	<b>112</b>
<b>Casters</b>	Adjustable Height Casters	<b>114</b>
	Economy Casters	<b>122</b>



**Our products** range from custom underbar equipment and refrigeration to durable high-quality faucets and pre-rinses, beverage dispensing systems and hand sinks.



**3 Generations**  
Family-owned and manufactured in the U.S.A. for **three generations**.

**75 Years**  
Industry leader with over **75 years of experience** in design and innovation.

**350,000 square feet**  
Rapidly expanded our manufacturing and distribution facilities to over **350,000 sq ft in the USA**.

<b>PURCHASE</b> ✉ orders@krowne.com	<b>WARRANTY</b> Krowne.com/warranty
<b>CONTACT</b> ✉ support@krowne.com ☎ 800.631.0442	<b>FOLLOW</b> f X in @ krowne @krownemetal
<b>VISIT KROWNE HQ</b> krowne.com   100 Haul Road, Wayne, NJ 07470	



## Display Benefits

Free Display



Free Display Faucets



Free Freight



90 Day Billing



Special Discount

# KROWNE® Displays

Our Showroom Display Program offers the opportunity to present the Krowne Plumbing line with customer interaction. Multiple configurations make them adaptable to most counter and showroom areas.





Model DISP-SLATWALL

## Freestanding Display

Our 36" wide freestanding display features a showroom quality slot-wall configuration showcasing some of our most popular products.

This space saving display is a great choice for small to mid-size counters, showrooms, and more!

### Suggested items ordered with display

Qty	Model	Qty	Model	Qty	Model
1	17-108WL	3	21-133L	1	21-424L
2	17-109WL	3	21-300L	6	21-192L
3	14-812L	3	21-310L	3	21-443L
3	14-8XXL	3	21-308L	3	22-204
3	12-812L	3	21-309L	3	10-400L
6	16-281	2	21-421L	3	11-406L
3	21-129L	2	21-422L	2	HS-9L
1	21-139L	3	21-423L	2	HS-2L



Model DISP-COMBO

## Combo Display

Our 48" wide combination display offers a hybrid of slot-wall and off-the-shelf product placement.

This display is great for high-volume locations with an emphasis on quality and availability.

### Suggested items ordered with display

Qty	Model	Qty	Model	Qty	Model
4	10-400L	1	21-139L	2	21-423L
4	12-808L	6	21-133L	2	21-445L
3	12-812L	3	21-310L	2	21-443L
3	14-812L	3	21-300L	6	21-192L
3	14-8XXL	6	21-308L	2	22-204
6	16-28	6	21-309L	2	22-800
3	17-108WL	2	21-307L	2	22-502
3	17-109WL	2	21-421L	2	HS-2L
4	21-129L	2	21-422L		

# FaucetFlex<sup>®</sup>

BY KROWNE

WHERE FLEXIBILITY MEETS INNOVATION



## AUTOMATIC SPEC SHEET CREATION

Generates a spec sheet after the completion of your faucet.



## FLEXIBLE CONFIGURATIONS

Over 3,500 choices for cutting-edge solutions.



## INSTANT PRICE GENERATION

Generates the cost of your faucet instantly.



## AR FUNCTIONALITY

Instantly view your faucet in augmented reality.




## NEW

Options added monthly.



[krowne.com/faucetflex](https://krowne.com/faucetflex)

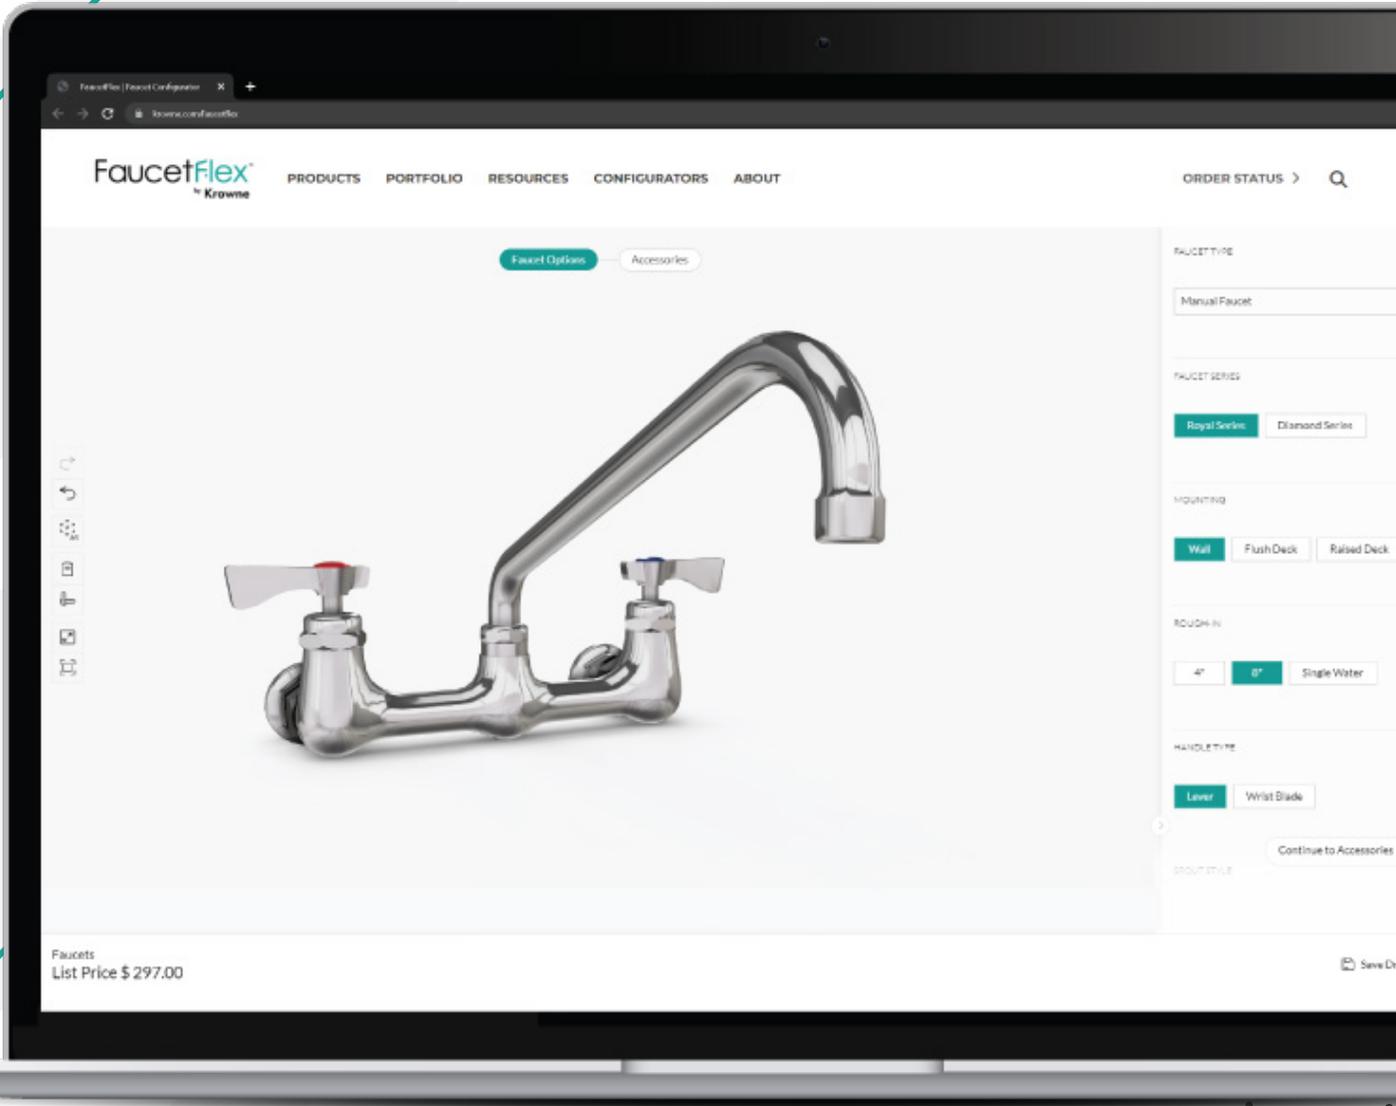

NEW

KROWNE

# HOME

COLLECTION

WHERE PRECISION MATTERS MOST

Elevate your kitchen aesthetics using our sleek designed faucets, soap dispensers and garbage disposal air switches. The perfect blend of style and functionality where premium quality meets contemporary design.



5 YEAR  
WARRANTY



MULTIPLE  
SPRAY  
MODES



AVAILABLE  
IN MULTIPLE  
FINISH OPTIONS



BEEHIVE AERATOR  
HELPS REDUCE  
SPLASH BACK



# Krowne Home Faucets

## Single Handle Kitchen Faucet

- Pull down spray wand with the ability to quickly switch between two spray modes: stream or shower
- Beehive aerator helps reduce splash back
- 304 stainless steel, environmentally friendly material
- 8" deck plate included (can be installed with or without 8" deck plate)
- Quick and easy installation

REPLACEMENT  
PART FOR:  
19-401S/19-401C

Replacement Valve  
Model  
**21-343L**



Model	Finish
<b>19-400B</b>	Matte Black



Model	Finish
<b>19-400C</b>	Chrome



Model	Finish
<b>19-400G</b>	Brushed Gold



Model	Finish
<b>19-400S</b>	Satin

## Single Handle Kitchen Faucet with Exposed Spring

- Pull down exposed spray wand with the ability to easily switch between three spray modes: stream, shower, or a quick fan burst for easily removing tough, caked on food and debris
- Beehive for aerator helps reduce splash back
- 304 stainless steel, environmentally friendly material
- 8" deck plate included (can be installed with or without 8" deck plate)
- Quick and easy installation



Model	Finish
<b>19-401B</b>	Matte Black



Model	Finish
<b>19-401C</b>	Chrome



Model	Finish
<b>19-401G</b>	Brushed Gold



Model	Finish
<b>19-401S</b>	Satin

# Krowne Home Faucets

## Single Lever Goose Neck Drinking Water Dispenser

- Laminar tip for smooth dispensing
- 304 stainless steel, environmentally friendly material
- 3/8" faucet can be mounted next to your main faucet and connected to a filter or RO system for clean drinking water
- Quick and easy installation



**Model**      **Finish**  
**19-430B**    Matte Black



**Model**      **Finish**  
**19-430C**    Chrome



**Model**      **Finish**  
**19-430G**    Brushed Gold



**Model**      **Finish**  
**19-430S**    Satin

# Krowne Home Soap Dispensers NEW

## Deck Mount Soap Dispenser

- 13 fl oz. capacity
- Fits 1-1/8" opening
- Brass pump head and threaded shank
- Refillable from above without removing bottle
- Easy-push, self-priming pump
- Pump head swivels 360 degrees



Model	Finish
<b>19-420B</b>	Matte Black

Model	Finish
<b>19-420C</b>	Chrome

Model	Finish
<b>19-420G</b>	Brushed Gold

Model	Finish
<b>19-420S</b>	Satin

# Garbage Disposal Air Switches NEW

## Garbage Disposal Air Switch Button

- Seamlessly match Krowne's Home faucet line, ensuring a cohesive and elegant look
- Available in four stylish finishes: matte black, chrome, brushed gold and satin
- Provide a reliable and safe method to operate garbage disposals
- Makes kitchen clean-up more efficient and hassle-free



Model	Finish
<b>19-410B</b>	Matte Black

Model	Finish
<b>19-410C</b>	Chrome

Model	Finish
<b>19-410G</b>	Brushed Gold

Model	Finish
<b>19-410S</b>	Satin

# DIAMOND<sup>™</sup> SERIES

PREMIUM PLUMBING COLLECTION

# Premium Plumbing

Precisely engineered and manufactured using premium components to create a durable and lasting solution supported by an industry leading lifetime warranty.



## Industry Leading Lifetime Warranty

Cutting-edge engineering and world-class components allow us to offer an industry first lifetime warranty on all Diamond Series products.



## Sleek Aesthetic with Ultra-Polish Satin Finish

Sharp contrasting lines blended with a bright satin finish creates a modern captivating appeal.

# DETAILS MATTER



## Diamond Series Offerings:

- Wall/Deck Mount Pre-Rinses
- Wall/Deck Mount Manual Faucets
- Wall Mount Electronic Sensor Faucets
- Rotary Ball Valve Waste Drains

**DUAL SPRAY**  
TECHNOLOGY

## Integral Smooth-Spin Swivel

Multi-spray functionality on our Diamond Series Spray Head.



## 1/4 Turn High-Performance Stainless Steel Ceramic Cartridge Valves with Integral Check

Engineered and rigorously tested to execute over 2 million turns at optimal performance.



## All Diamond Series Accessories Included

High quality install kits packaged with all Diamond Series faucets and pre-rinses for simple installation.

## Diamond Series Pre-Rinse Units

DUAL SPRAY  
TECHNOLOGY



Rotate Spray Head for Different Spray Styles

### Knife Pattern

Wide, fan-like pattern for large surface areas.

### Shower Pattern

Tight, high-powered shower pattern for tough grime.

### Stainless Steel Hyperflex

Extends lifespan.

### Pre-assembled

Cuts installation time.  
Mounting kit and flexible  
water lines included.

### Dura-Spring

Increased coils  
reduce stress  
on hose.

### Integral Smooth- Spin Swivel

Prevents tension build up  
on hose.

### Wall Bracket

Fully adjustable.

### Variable Spray Pattern

Select between two  
spray patterns

### Ultra-Polish Satin Finish

Finished on a solid  
brass base.



# Diamond Series Pre-Rinse Units

## Features apply to all Diamond Series Pre-Rinse Units

- Dual Spray Technology
- Ultra-polish satin finish on solid brass base
- ¼ Turn high-performance stainless steel ceramic cartridge valves with integral check
- 1.15 GPM spray head
- Includes wall bracket
- Pre-assembled to cut installation time



### 8" Center Wall Mount Pre-Rinse

- 8" centers
- ½" NPT female inlets
- 35" high with 15" overhang
- Mounting kit & flexible water lines included

Model  
**DX-108**



### 8" Center Wall Mount Pre-Rinse with Add-On Faucet

- 8" centers
- Add-On Faucet with 12" spout
- ½" NPT female inlets
- 38" high with 15" overhang
- Mounting kit & flexible water lines included

Model  
**DX-109**



### 8" Center Wall Mount Pre-Rinse with Add-On Faucet Less Spout

- 8" centers
- Add-On Faucet less spout
- ½" NPT female inlets
- 38" high with 15" overhang
- Mounting kit & flexible water lines included

Model  
**DX-109-X**



### Single Hole Deck Mount Pre-Rinse

- 1-1/8" OD x 2-1/4" shank
- Fits in 1-1/4" single hole
- 35" high with 15" overhang
- 13" water lines with 3/8" compression fittings

Model  
**DX-202**

# Diamond Series Pre-Rinse Replacement Parts



No.	Model	Description
1	DX-133	44" Hose
2	DX-162	Spring
3	DX-129	Repair Kit for Spray Head (Shower Pattern)
4	DX-171	Spray Head Handle with screws
5	DX-322	Button Valve
6	DX-165	Hook
7	DX-161	Spring Retainer
8	DX-160	18" Riser Pipe
8	DX-160-24	24" Riser Pipe
9	DX-137	Wall Bracket
	DX-166	1.15 GPM Spray Head
	DX-179	Repair Kit for Spray Head (Knife Pattern)

## 1.15 GPM Spray Head

- Dual Spray technology featuring two spray patterns
- Shower Pattern - wide, fan-like pattern for large surface area rinsing
- Knife Pattern - tight, high-powered shower pattern for tough grime removal
- 360° smooth-swivel functionality
- Ergonomic handle
- Durable valve for extended longevity



Model  
DX-129

**DUAL SPRAY**  
TECHNOLOGY

## Add-On Faucets

- 3/8" NPT Male inlet
- 3/8" NPT Female outlet
- Turns on and off without obstruction



Model      Add-On Faucet Spout Size

DX-138      6" Swing Spout

DX-149      8" Swing Spout

DX-139      12" Swing Spout

DX-140      14" Swing Spout

DX-141      16" Swing Spout

DX-1XX      Base Only (No Spout)

## Pre-Rinse Faucet Bases



Model      Description

DX-208      8" Center Pre-Rinse Base

DX-201      Single Hole Pre-Rinse Base

# Diamond Series Faucets

Features apply to all Diamond Series Faucets

- Ultra-polish satin finish on solid brass base
- 1/4 turn high-performance stainless steel ceramic cartridge valves w/ integral check
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Mounting kit & flexible water lines included



DX-601

## Single Hole Deck Mount Faucets

- Fits 1-1/4" single hole
- 1-1/8" OD x 2-1/4" shank
- 20" water lines with 3/8" compression fittings

Model	Spout Size
<b>DX-601</b>	6"W Double Bend
<b>DX-602</b>	8-1/2"W Double Bend
<b>DX-625</b>	4-1/2"W Double Bend
<b>DX-6XX</b>	Faucet Body (No Spout)



DX-310

## 4" Center Deck Mount Faucets

- 1/2" NPS male inlets on 4" centers

Model	Spout Size	Model	Spout Size
<b>DX-306</b>	6" Swing	<b>DX-316</b>	16" Swing
<b>DX-308</b>	8" Swing	<b>DX-301</b>	6"W Double Bend
<b>DX-310</b>	10" Swing	<b>DX-302</b>	8-1/2"W Double Bend
<b>DX-312</b>	12" Swing	<b>DX-325</b>	4-1/2"W Double Bend
<b>DX-314</b>	14" Swing	<b>DX-3XX</b>	Faucet Body (No Spout)



DX-410

## 4" Center Wall Mount Faucets

- 1/2" NPS male inlets on 4" centers

Model	Spout Size	Model	Spout Size
<b>DX-406</b>	6" Swing	<b>DX-400</b>	4-1/2"W Double Bend
<b>DX-408</b>	8" Swing	<b>DX-401</b>	6"W Double Bend
<b>DX-410</b>	10" Swing	<b>DX-402</b>	8-1/2"W Double Bend
		<b>DX-4XX</b>	Faucet Body (No Spout)



DX-908

## 8" Center Raised Deck Mount Faucets

- 1/2" NPS male inlets on 8" centers

Model	Spout Size	Model	Spout Size
<b>DX-906</b>	6" Swing	<b>DX-916</b>	16" Swing
<b>DX-908</b>	8" Swing	<b>DX-918</b>	18" Jointed
<b>DX-910</b>	10" Swing	<b>DX-901</b>	6"W Double Bend
<b>DX-912</b>	12" Swing	<b>DX-902</b>	8-1/2"W Double Bend
<b>DX-914</b>	14" Swing	<b>DX-9XX</b>	Faucet Body (No Spout)



DX-810

## 8" Center Wall Mount Faucets

- 1/2" NPT female inlets on 8" centers

Model	Spout Size	Model	Spout Size
<b>DX-806</b>	6" Swing	<b>DX-816</b>	16" Swing
<b>DX-808</b>	8" Swing	<b>DX-818</b>	18" Jointed
<b>DX-810</b>	10" Swing	<b>DX-801</b>	6"W Double Bend
<b>DX-812</b>	12" Swing	<b>DX-802</b>	8-1/2"W Double Bend
<b>DX-814</b>	14" Swing	<b>DX-8XX</b>	Faucet Body (No Spout)

# Diamond Series Replacement Parts

## Swing Spouts

- Built for high volume
- Double O-ring construction
- Ultra-polish satin finish



Model	Spout Size
<b>DX-420</b>	6" Swing Spout
<b>DX-421</b>	8" Swing Spout
<b>DX-422</b>	10" Swing Spout
<b>DX-423</b>	12" Swing Spout

Model	Spout Size
<b>DX-424</b>	14" Swing Spout
<b>DX-425</b>	16" Swing Spout
<b>DX-426</b>	18" Jointed Spout

## Double Bend Gooseneck Spouts

- Built for high volume
- Double O-ring construction
- Ultra-polish satin finish



Model	Spout Size
<b>DX-430</b>	4-1/2" Double Bend Gooseneck
<b>DX-431</b>	6" Double Bend Gooseneck
<b>DX-432</b>	8-1/2" Double Bend Gooseneck



## 1/4 Turn High-Performance Ceramic Cartridge Valves

- Fits all Diamond Series Faucets
- Integral check valve
- Stainless steel construction
- Fully assembled, easy to install

Model	Description
<b>DX-708</b>	Cold Valve
<b>DX-709</b>	Hot Valve



## Coupling Flanges

- Fits all Diamond Series Faucets
- Flange seal technology
- Eccentric fittings
- Includes nipples
- 1/2" NPT female inlet
- 1/4" adjustment per flange
- Two rubber washers



Flange Seal Technology

Model	Description
<b>DX-100</b>	Includes 2 Flanges



## Diamond Series Complete Mounting Kit

- (2) 3/8" Stainless Steel Braided Flexible Supply Hoses, 30"L
- Includes 1/2" NPT Close Elbows w/ Swivel Compression fittings on faucet side & 3/8" Compression fittings on water supply side
- (2) 1/2" NPS nipples, (2) washers & (2) lock nuts
- No soldering or Teflon tape required

Model	Description
<b>21-445L</b>	Diamond Series Mounting Kit

# Diamond Series Electronic Faucets



ADA Compliant

## 4" Center Wall Mount with Satin Finish

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- Easy adjust shut-off delay, auto flush, auto time-out and range sensitivity
- 2.2 GPM aerator installed, 0.5 GPM aerator included
- Includes control module, mechanical mixing valve & (3) supply hoses
- Replacement spouts available

**Model**  
**16-670**

### Replacement Spouts

Model	Description
<b>21-433L</b>	4-1/2" Satin Finish Double Bend

### Replacement Aerators

Model	Description
<b>22-671L</b>	1.0 GPM Honeycomb Aerator
<b>22-672L</b>	2.2 GPM Honeycomb Aerator



ADA Compliant

## Single Hole Wall Mount with Satin Finish

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- Easy adjust shut-off delay, auto flush, auto time-out and range sensitivity
- 2.2 GPM aerator installed, 0.5 GPM aerator included
- Includes control module, mechanical mixing valve & (3) supply hoses

**Model**  
**16-675**

# Diamond Series RotoPro Ball Valve Waste Drains



22-850-S

22-850

**NEW**

## RotoPro Stainless Steel 3-1/2" Ball Valve Waste Drains

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Stainless steel body
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste valve



Stainless Steel  
Ball Valve shown  
half open

Model	Description
<b>22-850</b>	3-1/2" RotoPro Ball Valve Waste Drain
<b>22-850-S</b>	3-1/2" RotoPro Ball Valve Waste Drain, Short Handle



# ROYAL SERIES **Pre-Rinse Units**

Pre-rinses come factory assembled to reduce installation time and have a knife style spray pattern for outstanding performance plus efficiency. Pre-rinses are ready to ship the same day.

Shown above: ShelfMaster Pre-Rinse 18-725L

# Pre-Rinse Features

## Stainless Steel Hose

High-performance radial wrap tubing pressure tested to 400 PSI. Corrugated exterior hose with reinforced inner tube.

## Built for Tough Environments

Durable high performing units that are engineered with unique spray patterns designed to eliminate grime & grease from dishes in seconds.

## Knife Style Spray Valve

High-performance valve cleans dishes more efficiently than the traditional shower style pattern sold by most competitors. 1.15 GPM with heat resistant bumper.

## E-Z Install Swivel Fitting

Allows for quick installation of pre-rinse without requiring plumber to fully rotate hose while assembling.

## Wall Bracket

Secures pre-rinse to wall. Included with all models. Can be cut to desired length.

## Mounting Kit Included

Everything needed to mount your pre-rinse is included for ease of installation.

## Add-On Faucet

Allows pre-rinse to double as a faucet. Included with 17-109WL or can be added to any other Krowne pre-rinse.

## Ceramic Cartridge Valves

High-performance 1/4 turn ceramic cartridge valves with integral check designed to last longer than traditional rubber compression valves.

## Offset Flanges

Eccentric fittings allow easy alignment adjustments for quick installation.



Royal Series Pre-Rinse Units include a 3-year warranty.

# Pre-Rinse Units



**8" Center  
Wall Mount Pre-Rinse  
with Wall Bracket**

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 35" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model	Case Qty.
17-108WL	3



**8" Center Wall Mount  
Pre-Rinse with Wall Bracket &  
Add-On Faucet (12" Spout)**

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.8 GPM faucet spout
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model	Case Qty.
17-109WL	3



**NEW**

**8" Center  
Wall Mount Pre-Rinse  
with Add-On Faucet, Less Spout**

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model	Case Qty.
17-109X	3

# Pre-Rinse Units



## Single Hole Deck Mount Pre-Rinse with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valves with integral check
- 1-1/8" OD x 2-1/4" shank; fits 1-¼" hole
- 20" water lines w/ 3/8" compression fittings
- 1.15 GPM spray head
- 35" high with 15" overhang
- Mounting hardware included
- Solid chrome plated brass base

Model	Case Qty.
17-202WL	3



## Single Hole Single Lever Deck Mount Pre-Rinse with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valve with integral check
- ½" NPS male inlet
- 1.15 GPM spray head
- 35" high with 15" overhang
- Mounting hardware included
- Solid chrome plated brass base

Model
17-206WL

## Replacement Parts for 17-108WL, 17-109WL, 17-109X, 17-202WL & 17-206WL

### ¼ Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinse
- Integral check valve
- Fully assembled, easy to install



Model	Description
21-307L	Diverter Valve
21-308L	Cold Valve
21-309L	Hot Valve

### Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern



Model
21-129L

### Pre-Rinse Hose with Grip

- 44" flexible stainless steel hose



Model
21-133L

for 17-108WL, 17-109WL, 17-109X

### E-Z Install Flexible Water Line Kit

- (2) 3/8" stainless steel braided flexible supply hoses
- Includes 1/2" NPT close elbows with swivel compression fittings on faucet side & 3/8" compression fittings on water supply side
- 22"L water lines



Model
21-443L

for 17-202WL & 17-206WL

### 13" Replacement Water Line Kit

- For use on new style single hole deck mount pre-rinse & faucets



Model
21-195L

# Pre-Rinse Units



## 4" Center Raised Deck Mount Pre-Rinse with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- 1/4 Turn high-performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 4" centers
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model  
**17-204WL**



## 8" Center Raised Deck Mount Pre-Rinse with Wall Bracket

- Pre-assembled to cut installation time
- Includes wall bracket
- 1/4 Turn high-performance ceramic cartridge valves with integral check
- 1/2" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 38" high with 15" overhang
- Mounting kit included
- Solid chrome plated brass base

Model  
**17-208WL**

## Replacement Parts for 17-204WL & 17-208WL

### 1/4 Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinse
- Integral check valve
- Fully assembled, easy to install



Model	Description
<b>21-307L</b>	Diverter Valve
<b>21-308L</b>	Cold Valve
<b>21-309L</b>	Hot Valve

### Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern



Model  
**21-129L**

### Pre-Rinse Hose with Grip

- 44" flexible stainless steel hose



Model  
**21-133L**

### 1/2" x 3/8" Braided Supply Hoses

- Includes (2) 3/8" stainless steel braided flexible supply hoses
- 1/2" female NPT fittings on faucet side, 3/8" compression fittings on supply side
- 24"L water lines



Model  
**21-198L**

For full Replacement Parts & Accessories, see page 98-99.

# Pre-Rinse Units



## 8" Center Wall Mount Solid Arm Pre-Rinse with Wall Bracket

- 12" solid swivel arm
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.15 GPM spray head
- 30" high with 12" overhang
- Mounting kit included
- Solid chrome plated brass base

Model  
**17-312WL**

### REPLACEMENT PARTS FOR 17-312WL



Replacement Arm  
Model  
**17-310**



24" Hose with Grip  
Model  
**21-181L**



## 4" Center Wall Mount Pre-Rinse with Wall Bracket

- Wall Mount on 4" Centers
- Includes wall bracket
- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.15 GPM spray head
- 35" high with 15" overhang
- Solid chrome plated brass base

Model  
**17-124WL**

## Replacement Parts for 17-312WL & 17-124WL

### 1/4 Turn Ceramic Cartridge Valves

- Fits all Royal Series pre-rinse
- Integral check valve
- Fully assembled, easy to install



Model	Description
<b>21-307L</b>	Diverter Valve
<b>21-308L</b>	Cold Valve
<b>21-309L</b>	Hot Valve

### Spray Head

- Interchangeable with most brands
- Ergonomic design
- 1.15 GPM Knife Pattern



Model  
**21-129L**

### Pre-Rinse Hose with Grip

- 44" flexible stainless steel hose



Model  
**21-133L**

### E-Z Install Flexible Water Line Kit

- (2) 3/8" stainless steel braided flexible supply hoses
- Includes 1/2" NPT close elbows with swivel compression fittings on faucet side & 3/8" compression fittings on water supply side
- 22" L water lines



Model  
**21-443L**

For full Replacement Parts & Accessories, see page 98-99.

# ShelfMaster Pre-Rinse

## 8" Center Wall Mount ShelfMaster Pre-Rinse with Wall Bracket and Add-On Faucet (12" Spout)

- Designed to fit under shelf without sacrificing reach
- Includes wall bracket, 8" riser (3" Riser optional) & mounting kit
- ¼ turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- Stainless steel chemical rigid tee connector
- 1.15 GPM spray head
- 1.8 GPM faucet spout
- 23-3/4"H with 15" overhang
- Solid chrome plated brass base

Model  
**18-725L**



Ceramic Cartridge Valves



Offset Flanges



Optional Chemical Rigid Tee Adapter and optional 3" Riser

## Chemical Rigid Tee Assembly

- Fits most manufacturers
- Installs on pre-rinse bases
- 3/8" NPT close nipple
- 3/8" NPT female thread
- 3/8" NPT tee fitting on side
- Chrome plated brass

Model  
**21-545L**



## REPLACEMENT PARTS & ACCESSORIES



Model  
**21-307L** Diverter Valve



Model  
**21-308L** Cold 1/4 Turn Ceramic Cartridge Valve



Model  
**21-309L** Hot 1/4 Turn Ceramic Cartridge Valve



Model  
**21-181L**  
24" Hose with Grip



Model  
**21-670**  
ShelfMaster Spring



Model  
**21-129L**  
1.15 GPM Spray Head



Model  
**21-198L**  
1/2" x 3/8" Braided Supply Hoses



Model  
**21-160-8L**  
8" L Riser (included on 18-725L)



Model  
**21-160-3L**  
3" L Riser



Model  
**21-179L**  
Spray Head Repair Kit

# Space Saver Pre-Rinse

## Features apply to all Space Saver Pre-Rinse Units

- Pre-assembled to cut installation time
- Includes wall bracket, add-on faucet & mounting kit
- Solid chrome plated brass base
- ¼ turn high-performance ceramic cartridge valves with integral check
- 1.15 GPM spray head
- 1.8 GPM faucet spout



### 4" Center Raised Deck Mount Space Saver Pre-Rinse

with Wall Bracket & Add-On Faucet

- 4" centers
- ½" NPT female inlets
- 24-7/8" high with 8" overhang

Model	Spout Size
<b>18-406L</b>	6" Swing Spout
<b>18-408L</b>	8" Swing Spout

18-408L



### Single Hole Deck Mount Space Saver Pre-Rinse

with Wall Bracket & Add-On Faucet

- Fits 1-1/4" single hole
- 1-1/8" OD x 2-1/4" shank
- 20" water lines with 3/8" compression fittings
- 25-1/4" high with 8" overhang

Model	Spout Size
<b>18-506L</b>	6" Swing Spout
<b>18-508L</b>	8" Swing Spout

18-508L

### 8" Center Raised Deck Mount Space Saver Pre-Rinse

with Wall Bracket & Add-On Faucet

- 8" centers
- ½" NPT female inlets
- 24-7/8" high with 8" overhang

Model	Spout Size
<b>18-606L</b>	6" Swing Spout
<b>18-608L</b>	8" Swing Spout



18-608L

### 8" Center Wall Mount Space Saver Pre-Rinse

with Wall Bracket & Add-On Faucet

- 8" centers
- ½" NPT female inlets
- 22-1/2" high with 8" overhang

Model	Spout Size
<b>18-706L</b>	6" Swing Spout
<b>18-708L</b>	8" Swing Spout



18-708L

## REPLACEMENT PARTS & ACCESSORIES



Model	Description
<b>21-307L</b>	Diverter Valve
<b>21-308L</b>	Cold 1/4 Turn Ceramic Cartridge Valve
<b>21-309L</b>	Hot 1/4 Turn Ceramic Cartridge Valve



Model	Description
<b>21-181L</b>	24" Hose for Space Saver Pre-Rinse



Model	Description
<b>21-163</b>	Spring for Space Saver Pre-Rinse



Model	Description
<b>21-129L</b>	1.15 GPM Spray Head




Model	Description
<b>21-160-8L</b>	8"L Riser for Space Saver Pre-Rinse



Model	Description
<b>21-443L</b>	E-Z Install Flexible Water Line Kit

# Pre-Rinse Replacement Parts

Interchangeable with most brands

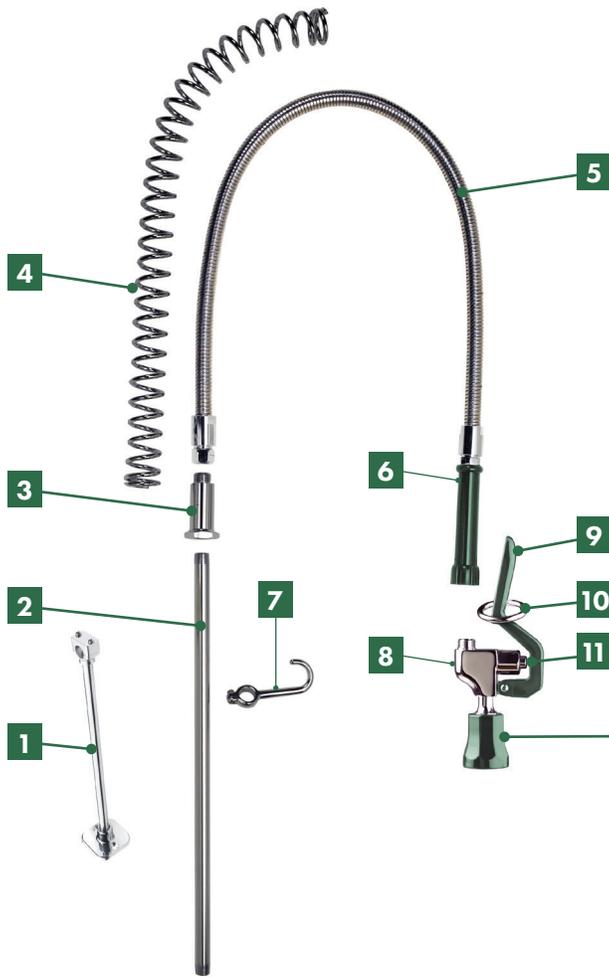

No.	Model	Description
1	21-137	Wall Bracket
2	21-168	Riser (12" Long, 3/8" male thread)
2	21-160L	Riser (18" Long, 3/8" male thread)
2	21-160-24L	Riser (24" Long, 3/8" male thread)
3	21-161L	Spring Retainer
4	21-162	24" Spring
5	21-133L	44" Hose Assembly
6	21-164L	Grip (1/2" NPS Male)
7	21-165	Hook/Screw Assembly
8	21-129L	Complete Pre-Rinse Spray Valve
9	21-171	Spray Head Handle
10	21-170	Ring (Optional)
11	21-302L	Button Valve
12	21-179L	Spray Head Repair Kit - New Style (2007 to present)
13	21-166L	Spray Head Repair Kit - Old Style (Prior to 2007)

Spray Head Repair Kit (New Style 2007 to Present)



12 Model 21-179L

Spray Head Repair Kit (Old Style prior to 2007)



13 Model 21-166L

## Replacement Pre-Rinse Bases



No.	Model	Description
1	21-101L	Single Wall Base
2	21-108L	8" Center Wall Base
3	21-201L	Single Deck Base

No.	Model	Description
4	21-202L	Single Hole Deck Base
5	21-204L	4" Center Deck Base
6	21-208L	8" Center Deck Base

## Pre-Rinse with Wall Bracket Less Base

- Does not include faucet body base
- Pre-assembled to cut installation time
- Includes wall bracket and hook
- 1.15 GPM spray head
- 35" high with 15" overhang



Model 17-XXXXL

# Pre-Rinse Replacement Parts

## Spray Head

- Ergonomic design
- 1.15 GPM and 0.65 GPM models (60 PSI)
- Full replacement parts available
- Interchangeable with most brands
- Water saving spray head available



Model	Description
<b>21-129L</b>	1.15 GPM Spray Head
<b>21-127L</b>	0.65 GPM Spray Head

## Replacement Parts

Model	Description
<b>21-148</b>	Bumper
<b>21-184L</b>	Knife Pattern Brass Nozzle (0.65 GPM)
<b>21-185L</b>	Shower Pattern Brass Nozzle (1.15 GPM)
<b>21-189L</b>	Shower Pattern Brass Nozzle (1.07 GPM)
<b>21-302L</b>	Button Valve Repair Kit

## Knife Style Spray Valve

High-performance valve cleans dishes more efficiently than the traditional shower style pattern sold by most competitors. 1.15 GPM with heat resistant bumper.



## Pre-Rinse Hose with Grip

- Interchangeable with most brands
- Flexible stainless steel hose
- 3/8" thread

Model	Hose Length	Case Qty.
<b>21-181L</b>	24"L	<b>12</b>
<b>21-133L</b>	44"L	<b>12</b>
<b>21-134L</b>	60"L	<b>12</b>
<b>21-135L</b>	72"L	<b>12</b>
<b>21-136L</b>	96"L	<b>12</b>

## Swivel Pre-Rinse Hose Connector

- Allows spray head to turn 360°
- Reduces stress on hose




<b>Model</b>	<b>21-547L</b>
--------------	----------------

## Add-On Faucets

- Interchangeable with most brands
- Turns on and off without obstruction
- 3/8" NPT male inlet
- 3/8" NPT female outlet
- Solid chrome plated brass

Model	Description
<b>21-138L</b>	Add-On Faucet with 6" Spout
<b>21-149L</b>	Add-On Faucet with 8" Spout
<b>21-139L</b>	Add-On Faucet with 12" Spout
<b>21-140L</b>	Add-On Faucet with 14" Spout
<b>21-141L</b>	Add-On Faucet with 16" Spout
<b>21-150L</b>	Add-On Faucet with 10" Spout
<b>21-1XXL</b>	Add-On Faucet Less Spout

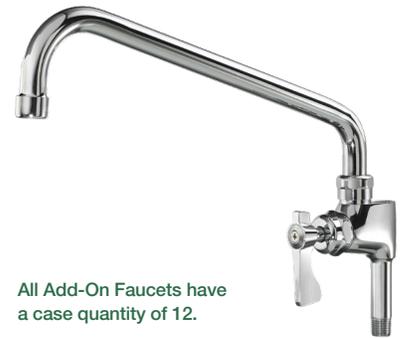

All Add-On Faucets have a case quantity of 12.



Valve for Add-On Faucets with Black Index

<b>Model</b>	<b>21-307L</b>
--------------	----------------

## Shower Pattern Spray Head

- 1.15 GPM spray head
- Interchangeable with most brands
- Full replacement parts available



<b>Model</b>	<b>21-130L</b>
--------------	----------------

## Replacement Parts

Model	Description
<b>21-145</b>	1.15 GPM Spray Face
<b>21-142</b>	Replacement Bumper

## Angled Pre-Rinse Spray Head

- 3.18 GPM spray head
- Interchangeable with most brands
- Full replacement parts available



<b>Model</b>	<b>21-131L</b>
--------------	----------------

## Replacement Parts

Model	Description
<b>21-302L</b>	Button Valve Repair Kit
<b>21-142</b>	Replacement Bumper
<b>21-143</b>	3.18 GPM Spray Face

## Pot Filler Spray Head

- Interchangeable with most brands
- Full replacement parts available



<b>Model</b>	<b>21-132L</b>
--------------	----------------

## Replacement Parts

Model	Description
<b>21-302L</b>	Button Valve Repair Kit



# ROYAL SERIES Plumbing

Durable in demanding commercial environments. Used in grocery stores, retail, bars, restaurants, healthcare, education and hospitality. Efficient components for a quick install are included.


Shown above: 4" Center Raised Deck Mount Faucet 15-410L



### 4" Center Wall Mount Faucets

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Solid chrome plated brass base

14-410L

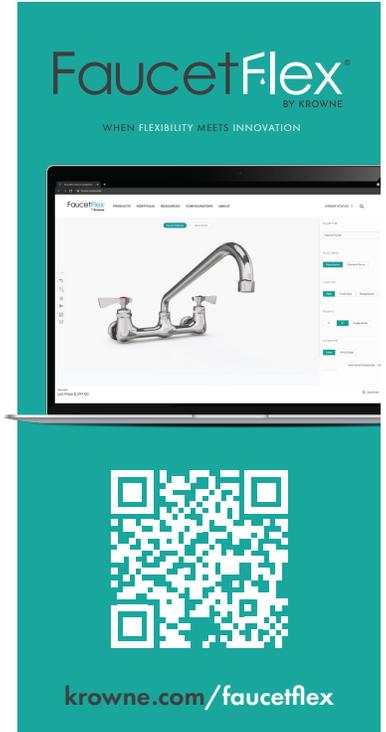

#### Faucets

Model	Spout Size	Case Qty
14-406L	6" Swing Spout	12
14-408L	8" Swing Spout	12
14-410L	10" Swing Spout	12
14-400L	3-1/2" Wide Gooseneck Spout (0.5 GPM)	12
14-401L	6" Wide Gooseneck Spout	12
14-402L	8-1/2" Wide Gooseneck Spout	12
14-4XXL	Faucet Body (No Spout)	12

#### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 46 & 53



14-400L



14-400L-W-E2

### 4" Center Wall Mount Faucets with Wrist Blade Handles

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Vandal resistant wrist blade handles
- Solid chrome plated brass base

#### Faucets

Model	Spout Size	Case Qty
14-406L-W-E4	6" Swing Spout	-
14-410L-W-E4	10" Swing Spout	-
14-400L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
14-401L-W-E4	6" Wide Gooseneck Spout	-
14-4XXL-W	Faucet Body (No Spout)	12

#### Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit
21-313	Vandal Resistant Wrist Blade Handle Kit

## 8" Center Wall Mount Faucets

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

Faucets		
Model	Spout Size	Case Qty
14-806L	6" Swing Spout	6
14-808L	8" Swing Spout	6
14-810L	10" Swing Spout	6
14-812L	12" Swing Spout	6
14-814L	14" Swing Spout	6
14-816L	16" Swing Spout	6
14-818L	18" Jointed Spout	6
14-824L	24" Jointed Spout	6
14-801L	6" Wide Gooseneck Spout	6
14-802L	8-1/2" Wide Gooseneck Spout	6
14-8XXL	Faucet Body (No Spout)	6



1.8 GPM Aerator

Ceramic Cartridge Valves

Offset Flanges



14-801L



14-812L

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 46 & 53

## 8" Center Wall Mount Faucets with Wrist Blade Handles

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Vandal resistant wrist blade handles
- Mounting kit included
- Solid chrome plated brass base

Faucets		
Model	Spout Size	Case Qty
14-808L-W-E4	8" Swing Spout	-
14-812L-W-E4	12" Swing Spout	-
14-801L-W-E4	6" Wide Gooseneck Spout	-
14-802L-W-E4	8-1/2" Wide Gooseneck Spout	-
14-8XXL-W	Faucet Body (No Spout)	6



14-802L-W-E4

### Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 46 & 53



15-308L

### 4" Center Deck Mount Faucets

- ¼ Turn high-performance ceramic cartridge valves with integral check
- Durable full range swing spout with double O-ring construction
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Lever handles
- Solid chrome plated brass base

#### Faucets

Model	Spout Size	Case Qty
15-306L	6" Swing Spout	12
15-308L	8" Swing Spout	12
15-310L	10" Swing Spout	12
15-312L	12" Swing Spout	12
15-314L	14" Swing Spout	12
15-316L	16" Swing Spout	12
15-325L	3-1/2" Wide Gooseneck Spout (0.5 GPM)	12
15-301L	6" Wide Gooseneck Spout	12
15-302L	8-1/2" Wide Gooseneck Spout	12
15-350L	6" Swing Spout w/ Hose Adapter	-
15-3XXL	Faucet Body (No Spout)	12



15-301L

#### Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

### 4" Center Deck Mount Faucets with Wrist Blade Handles

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Vandal resistant wrist blade handles
- Solid chrome plated brass base

#### Faucets

Model	Spout Size	Case Qty.
15-308L-W-E4	8" Swing Spout	-
15-312L-W-E4	12" Swing Spout	-
15-325L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
15-301L-W-E4	6" Wide Gooseneck Spout	-
15-3XXL-W	Faucet Body (No Spout)	12



15-301L-W-E4

#### Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 46 & 53



15-510L



15-501L

## 8" Center Deck Mount Faucets

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Solid chrome plated brass base

### Faucets

Model	Spout Size	Case Qty
15-506L	6" Swing Spout	-
15-508L	8" Swing Spout	12
15-510L	10" Swing Spout	-
15-512L	12" Swing Spout	12
15-514L	14" Swing Spout	-
15-516L	16" Swing Spout	12
15-525L	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
15-501L	6" Wide Gooseneck Spout	-
15-502L	8-1/2" Wide Gooseneck Spout	12
15-5XXL	Faucet Body (No Spout)	12

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

## 8" Center Deck Mount Faucets with Wrist Blade Handles

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 8" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Vandal resistant wrist blade handles
- Solid chrome plated brass base



15-501L-W-E4

### Faucets

Model	Spout Size	Case Qty.
15-508L-W-E4	8" Swing Spout	-
15-512L-W-E4	12" Swing Spout	-
15-525L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)	-
15-501L-W-E4	6" Wide Gooseneck Spout	-
15-5XXL-W	Faucet Body (No Spout)	12

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 46 & 53

## 4" Center Raised Deck Mount Faucets

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base



15-410L



15-425L

### Faucets

Model	Spout Size
15-406L	6" Swing Spout
15-408L	8" Swing Spout
15-410L	10" Swing Spout
15-412L	12" Swing Spout
15-414L	14" Swing Spout
15-418L	18" Jointed Spout
15-425L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-401L	6" Wide Gooseneck Spout
15-402L	8-1/2" Wide Gooseneck Spout
15-4XXL	Faucet Body (No Spout)

### Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

## 4" Center Raised Deck Mount Faucets with Wrist Blade Handles

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 4" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Vandal resistant wrist blade handles
- Mounting kit included
- Solid chrome plated brass base



15-425L-W-E2

### Faucets

Model	Spout Size
15-408L-W-E4	8" Swing Spout
15-412L-W-E4	12" Swing Spout
15-425L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-401L-W-E4	6" Wide Gooseneck Spout
15-4XXL-W	Faucet Body (No Spout)

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 46 & 53



15-810L



15-801L

## 8" Center Raised Deck Mount Faucets

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

### Faucets

Model	Spout Size
15-806L	6" Swing Spout
15-808L	8" Swing Spout
15-810L	10" Swing Spout
15-812L	12" Swing Spout
15-814L	14" Swing Spout
15-818L	18" Swing Spout
15-825L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-801L	6" Wide Gooseneck Spout
15-802L	8-1/2" Wide Gooseneck Spout
15-8XXL	Faucet Body (No Spout)

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

## 8" Center Raised Deck Mount Faucets with Wrist Blade Handles

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- 1.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Vandal resistant wrist blade handles
- Mounting kit included
- Solid chrome plated brass base



15-801-W-E4

### Faucets

Model	Spout Size
15-808L-W-E4	8" Swing Spout
15-812L-W-E4	12" Swing Spout
15-825L-W-E2	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-801L-W-E4	6" Wide Gooseneck Spout
15-8XXL-W	Faucet Body (No Spout)

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-198L	1/2" x 3/8" Braided Supply Hoses
21-311	Wrist Blade Handle Kit

For spout and aerator options see pages 46 & 53

## Ultra Duty Service Sink Faucet with Cast Spout

- Heavy duty flanges with eccentric fittings for quick installations
- Includes wall bracket for spout support
- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT male inlets on 8" centers
- 6-1/2" heavy cast spout with pail hook and hose thread
- Mounting kit included
- Solid rough chrome brass base



### Faucets

Model	Spout Size
<b>16-127</b>	Service Sink Faucet with Lever Handles
<b>16-127-W</b>	Service Sink Faucet with Wrist Blade Handles

**16-127 Case Quantity: 6**

### Replacement Parts

Model	Description
<b>21-308L</b>	Cold 1/4 Turn Ceramic Cartridge Valve
<b>21-309L</b>	Hot 1/4 Turn Ceramic Cartridge Valve
<b>16-128</b>	Replacement Wall Bracket
<b>16-129</b>	Vacuum Breaker Repair Kit
<b>21-311</b>	Wrist Blade Handle Kit
<b>21-443L</b>	E-Z Install Flexible Water Line Kit



Pail Hook & Hose Threads



Vacuum Breaker



Integral Stops

## Floor Mop Sink

- MS-2424 Bowl Size: 21" x 21" x 9"
- MS-1818 Bowl Size: 15" x 15" x 9"
- 3-1/2" drain w/ 2" IPS outlet
- 18 gauge stainless steel
- Mounting hardware included



MS-2424

Model	Overall Size
<b>MS-2424</b>	24" x 24" x 13"
<b>MS-1818</b>	18" x 18" x 13"

### Replacement Parts

Model	Description
<b>23-145</b>	Replacement Drain

## Mop Hangers

- Stainless steel construction with spring action grips
- MH-24 size: 23"L x 4-1/2"H
- MH-5 size: 5"L x 4-1/2"H
- MH-5 includes 30" rubber hose with 3/4" garden hose inlet



MH-24



MH-5

Model	Description
<b>MH-24</b>	Mop Hanger with 3 Grips
<b>MH-5</b>	Mop Hanger with 1 Grip (Includes hose)

## 4" Center Deck Mount Laundry Tub Faucet

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed on 15-306L, garden hose adapter installed on 15-350L
- Durable full range swing spout with double O-ring construction
- Lever handles
- Solid chrome plated brass base



15-350L

Model	Spout Size
<b>15-306L</b>	6" Swing Spout
<b>15-350L</b>	6" Swing Spout with Garden Hose Adapter

## Adjustable Centers Wall Mount Faucet

- ¼ Turn high-performance ceramic cartridge valves with integral check
- 2-1/4" – 8-1/4" adjustable centers
- 1/2" NPT female inlets
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base

### Faucets

Model	Spout Size
15-612L	12" Swing Spout
15-625L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
15-601L	6" Wide Gooseneck Spout



15-601L

### Replacement Parts & Accessories

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 46 & 53



15-612L

## 8" Wall Mount Full Flow Faucet

- ¼ Turn high-performance ceramic cartridge valves
- 3/4" NPT female inlets on 8" centers
- Durable full range swing spout with double O-ring construction
- Cross handles
- Mounting kit included
- Solid chrome plated brass base

### Faucets

Model	Spout Size
18-812L	12" Full Flow Spout
18-814L	14" Full Flow Spout



18-812L

### Replacement Parts & Accessories

Model	Description
21-350L	Cold 1/4 Turn Ceramic Cartridge Valve
21-351L	Hot 1/4 Turn Ceramic Cartridge Valve
21-458L	Replacement 6-1/2" Full Flow Spout
21-460L	Replacement 12" Full Flow Spout
21-461L	Replacement 14" Full Flow Spout
21-463L	Replacement 18" Full Flow Spout
21-465L	Replacement 18" Jointed Full Flow Spout
21-467L	Replacement 24" Jointed Full Flow Spout



Cross Handle



Full Flow Outlet



3/4" Inlets

## 8" Wall Mount Pot Filler Faucet

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPT female inlets on 8" centers
- Full flow with cross handle shut-off at end of spout
- Durable full range swing spout with double O-ring construction
- Lever handles
- Mounting kit included
- Solid chrome plated brass base



Faucets	
Model	Spout Size
16-250L	6" Swing Spout
16-251L	12" Jointed Spout
16-252L	18" Jointed Spout
16-253L	24" Jointed Spout

Replacement Parts & Accessories	
Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-441L	12" Pot Filler Spout w/ Shut-Off Valve
21-442L	6" Pot Filler Spout w/ Shut-Off Valve
21-443L	E-Z Install Flexible Water Line Kit

## Single Hole Wall Mount Pot Filler Faucet

- Single hole, single temperature
- ¼" Turn high-performance ceramic cartridge valve with integral check
- ½" NPS male inlet
- Full flow with cross handle shut-off at end of spout
- Durable full range swing spout with double O-ring construction
- Lever handle
- Solid chrome plated brass base



Faucets	
Model	Spout Size
16-178L	6" Swing Spout
16-179L	12" Jointed Spout
16-181L	18" Jointed Spout
16-182L	24" Jointed Spout

Replacement Parts & Accessories	
Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-441L	12" Pot Filler Spout w/ Shut-Off Valve
21-442L	6" Pot Filler Spout w/ Shut-Off Valve

## Single Hole Deck Mount Pot Filler Faucet

- Single hole, single temperature
- ¼" Turn high-performance ceramic cartridge valve with integral check
- ½" NPS male inlet
- Full flow with cross handle shut-off at end of spout
- Durable full range swing spout with double O-ring construction
- Lever handle
- Solid chrome plated brass base



Faucets	
Model	Spout Size
16-160L	6" Swing Spout
16-161L	12" Jointed Spout
16-162L	18" Jointed Spout
16-163L	24" Jointed Spout

Replacement Parts & Accessories	
Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve
21-441L	12" Pot Filler Spout w/ Shut-Off Valve
21-442L	6" Pot Filler Spout w/ Shut-Off Valve

## Single Hole Wall Mount Faucet

- Single hole, single temperature
- ¼ Turn high-performance ceramic cartridge valve with integral check
- ½" NPS male inlets
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handle
- Solid chrome plated brass base



Faucets	
Model	Spout Size
<b>16-170L</b>	6" Swing Spout
<b>16-171L</b>	12" Swing Spout

Replacement Parts & Accessories	
Model	Description
<b>21-308L</b>	Cold 1/4 Turn Ceramic Cartridge Valve
<b>21-309L</b>	Hot 1/4 Turn Ceramic Cartridge Valve

For spout and aerator options see pages 46 & 53

## Single Hole Wall Mount Remote Spout

- Controlled by foot or knee valve
- ½" NPS male inlet, single hole
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Solid chrome plated brass base



Faucets	
Model	Spout Size
<b>16-140L</b>	3-1/2" Wide Gooseneck Spout (0.5 GPM)
<b>16-141L</b>	6" Swing Spout
<b>16-142L</b>	8" Swing Spout
<b>16-143L</b>	10" Swing Spout

For spout and aerator options see pages 46 & 53

## Single Hole Deck Mount Remote Spout

- Controlled by foot or knee valve
- ½" NPS male inlet
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Solid chrome plated brass base



Faucets	
Model	Spout Size
<b>16-130L</b>	3-1/2" Wide Gooseneck Spout (0.5 GPM)
<b>16-131L</b>	6" Swing Spout
<b>16-132L</b>	8" Swing Spout
<b>16-133L</b>	10" Swing Spout

For spout and aerator options see pages 46 & 53



# Lavatory Faucets

Used for restrooms, schools, hotels, medical offices, bars, restaurants and more. Water saving aerators and adjustable metering valves limit water consumption in high volume applications.

Shown above: 4" Deck Mount Faucet with Wrist Blade Handles 14-580L



## Faucet

Model	Description
14-510L	Single Hole Single Lever Lavatory Faucet

**NEW**

## Single Hole Single Lever Lavatory Faucet

- Ceramic cartridge valve with built-in temperature limit stop
- Single hole 3/8" NPS male inlet
- 1.5 GPM aerator installed
- Single lever handle
- Color coded index
- Solid chrome plated brass
- ADA compliant

### Replacement Parts

Model	Description
21-345L	Single Lever Ceramic Valve Repair Kit
21-346	Single Lever Handle
21-198L	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 53



ADA Compliant

## EZ-Install Water Line Kits

### MOST POPULAR

#### E-Z Install Flexible Water Line Kit

- (2) 3/8" stainless steel braided flexible supply hoses
- Includes 1/2" NPT close elbows w/ swivel compression fittings on faucet side & 3/8" compression fittings on water supply side
- 22"L water lines
- No soldering or thread sealant tape required



Model  
21-443L



### MOST POPULAR

#### E-Z Install Flexible Water Line Kit with Mounting Hardware

- (2) 3/8" stainless steel braided flexible supply hoses
- Includes 1/2" NPT close elbows w/ swivel compression fittings on faucet side & 3/8" compression fittings on water supply side
- (2) 1/2" NPS nipples, (2) washers & (2) lock nuts
- 30"L water lines
- No soldering or thread sealant tape required



Model  
21-445L

#### E-Z Install Straight Copper Water Line Kit

- (2) 3/8" Straight Copper water lines
- Includes 1/2" NPT close elbows w/ swivel compression fittings on faucet side
- 14"L water lines
- No soldering or thread sealant tape required on faucet side



Model  
21-440L

#### High Volume E-Z Install Flexible Water Line Kit

- (2) 1/2" stainless steel braided flexible supply hoses
- Includes 1/2" NPT close elbows w/ swivel compression fittings on faucet side & 5/8" OD compression fittings which are removable to convert to 1/2" NPS male fittings on water supply side
- 22"L water lines
- No soldering or thread sealant tape required on faucet side



Model  
21-444L

### EASY INSTALLATION

#### Straight Copper Water Line Installation Guide for Licensed Plumber

Install wall mount faucet on sink. Insert black washer inside brass fitting located at the end of long copper tube and attach to the cold side male water line fitting coming out of faucet and tighten properly. Connect copper tube to water source using compression fitting. Repeat procedure for hot side. After installation, turn water on and check for leaks.



#### Flexible Stainless Steel Water Line Installation Guide for Licensed Plumber

Install wall mount faucet on sink. Insert black washer inside brass fitting located at the end of each stainless steel hose and attach to the cold side male nipple coming out of faucet and tighten properly. Repeat procedure for hot side. Connect to water source using compression fitting or male NPS fitting and tighten properly. After installation, turn water on and check for leaks.



# Flexible Water Line & Faucet Mounting Kits



## Flexible Water Line Kit with Heavy Duty Wall Mounting Kit

- Includes (2) 3/8" stainless steel braided flexible supply hoses
- 1/2" Female NPT fittings on faucet side, 3/8" compression fittings on supply side
- Includes (2) 1/2" NPT male x 1/2" NPS female close elbows, (2) 1/2" NPS x 1-1/2" brass nipples, (2) lock nuts, (2) rosettes, (2) rubber gaskets
- 24"L water lines
- No soldering or thread sealant tape required

Model  
21-193L



## Heavy Duty Wall Mounting Kit

- For wall mount faucets & pre-rinse units
- Space saving design
- Includes (2) 1/2" NPT male x 1/2" NPS female close elbows, (2) 1/2" NPS x 1-1/2" brass nipples, (2) lock nuts, (2) rosettes, (2) rubber gaskets

Model  
21-192L



## 1/2" x 3/8" Braided Supply Hoses

- Includes (2) 3/8" stainless steel braided flexible supply hoses
- 1/2" female NPT fittings on faucet side, 3/8" compression fittings on supply side
- 24"L water lines
- No soldering or thread sealant tape required

Model  
21-198L



## Standard Wall Mounting Kit

- For wall mount faucets & pre-rinse units
- Includes (2) 1/2" NPT male x 1/2" NPS female brass elbows, (2) 1/2" NPS x 1-1/2" brass nipples, (2) lock nuts, (2) rosettes, (2) rubber gaskets

Model  
21-190L



## Space Saver 90° Elbow Kit

- Space saving design
- Solid brass
- Includes (2) 1/2" NPT female close elbows

Model  
21-191L



## Mounting Kit

- For wall mount faucets & pre-rinse units
- Includes: (2) 1/2" NPT x 1-1/2" brass nipples, (2) lock nuts, (2) rosettes, (2) rubber gaskets
- 1.5" long

Model  
21-194L



## Deck Mounting Kit

- Includes: (2) 1/2" NPS x 3-1/2" brass nipples, (2) lock nuts, (2) rosettes, (2) rubber gaskets
- 3.5" long

Model  
21-196L



## Faucet Shank Extension Kit

- For thicker deck installations where extra shank length is needed
- Includes (2) 1/2" NPS x 2" shank extensions, (4) washers, (2) spacers
- 2" nipple extension

Model  
21-199L



## Thread Sealant Tape

- 1/2" x 260" roll
- 100% pure PTFE
- 0.42 g/cm<sup>3</sup> density
- ULc and CSA listed

Model  
25-150

# Replacement Valves & Handles

## MOST POPULAR

### 1/4 Turn High-Performance Ceramic Cartridge Valves

- Fits all Royal Series faucets & pre-rinse units
- Integral check valve
- Fully assembled, easy to install
- Back flow preventer

Model	Description
21-307L	Diverter Valve
21-308L	Cold Valve
21-309L	Hot Valve



### 1/4 Turn High Performance Ceramic Cartridge Valves Less Handles

- Handles not included

Model	Description
21-333L	Cold Valve
21-334L	Hot Valve



### Compression Cartridge Valves

- Fits all Royal Series faucets
- Integral check valve
- Fully assembled, easy to install

Model	Description
21-330L	Cold Valve
21-331L	Hot Valve



### Cross Handle 1/4 Turn Ceramic Cartridge Valves (Full Flow Faucet Only)

- Fits 3/4" full flow faucet only (18-8 Series)
- Fully assembled, easy to install

Model	Description
21-350L	Cold Valve
21-351L	Hot Valve



### Lever Handle Kit

- Fits all Krowne faucets
- Contains (2) screws, (2) handles, hot & cold indicator
- Solid chrome plated brass

Model
21-306



### Antibacterial Lever Handle Kit

- Coated with an antibacterial agent that prevents bacterial and fungal growth
- Fits all Krowne faucets
- Contains (2) handles
- Hot & cold indicators and screws not included
- Solid chrome plated brass

Model
21-306-A



### Wrist Blade Handle Kit

- Fits all Krowne faucets
- 4" length
- Contains (2) screws, (2) handles, hot & cold indicator
- Solid chrome plated brass

Model
21-311



### Vandal Resistant Wrist Blade Handle Kit

- Fits all Krowne faucets
- 4" length
- Contains (2) screws, (2) handles, hot & cold indicator
- Solid chrome plated brass

Model
21-313

# Coupling Flanges & Adapters

## Standard Coupling Flanges


- Fits all Royal Series faucets
- Eccentric fittings
- 1/2" NPT female inlet
- 1/4" adjustment per flange
- Two rubber washers



Model  
**21-401L**

## Replacement Washer Set

- 12 pieces per set
- Fits all Royal Series coupling flanges

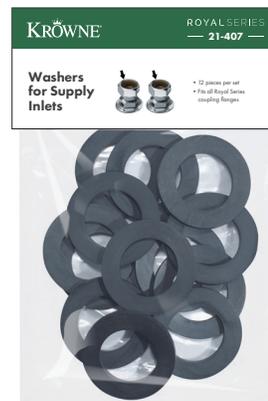

Model  
**21-407**

## Medium Adjustable Supply Inlets

- Fits Royal Series
- Adjustable centers
- 1" total range
- 1/2" NPT female inlet
- Two rubber washers



Model  
**21-402L**

## Large Adjustable Supply Inlets

- Fits Royal Series
- Adjustable centers
- 2" total range
- 1/2" NPT female inlet
- Two rubber washers



Model  
**21-403L**

## Quick Connect for All Krowne Silver Series

- Allows for mounting Royal Series faucet on 12-8XXL Silver Series supply inlets
- Quick & easy installation



Model  
**21-528L**

## Replacement Valves for Fisher\*

- Fits most Fisher\* models
- Includes check valve

Model	Spout Size
<b>21-320L</b>	Cold Stem Assembly
<b>21-321L</b>	Hot Stem Assembly



## Coupling Flanges with Built-in Shut-off Valves

- Eccentric fittings
- Fits all Royal Series coupling flanges
- 1/2" NPT female inlet
- Two rubber washers



Model  
**21-452L**

## Ultimate E-Z Install Faucet Adaptor

- Fits Royal Series faucets on existing Fisher\*, Chicago\*, Central Brass\* and 12-8XXL Krowne supply inlets 1/2" NPT female inlet, not required for T&S brass\*
- Cuts time and no need to change supply inlets



Model  
**21-534L**

\*This product is not manufactured or authorized by any other manufacturer. Registered Trade Name or Mark of the original manufacturer of the product which this part fits, is not owned, associated or to be confused with our company.

# Spouts

## Universal Swing Spouts

- Built for high volume
- Double O-ring construction
- Fits all Krowne faucets & interchangeable with most brands; includes adapter to fit T&S Brass\* faucets
- 1"-20 UNEF thread



Model	Spout Size	Flow Rate
21-420L	6" Swing Spout	1.8 GPM
21-421L	8" Swing Spout	1.8 GPM
21-422L	10" Swing Spout	1.8 GPM
21-423L	12" Swing Spout	1.8 GPM
21-424L	14" Swing Spout	1.8 GPM
21-425L	16" Swing Spout	1.8 GPM
21-426L	18" Jointed Spout	1.8 GPM
21-435L	24" Jointed Spout	1.8 GPM

## Gooseneck Spouts & Double Bend Swing Spouts

- Double O-ring construction
- Fits all Krowne faucets
- Interchangeable with most brands; includes adapter to fit T&S Brass\* faucets
- 1"-20 UNEF thread



Model	Spout Size	Height	Flow Rate
21-427L	3-1/2" Wide Gooseneck Spout	7-1/4"	0.5 GPM
21-428L	6" Wide Gooseneck Spout	8-1/2"	1.8 GPM
21-429L	8-1/2" Wide Gooseneck Spout	10"	1.8 GPM
21-430L	4-1/2" Wide Double Bend Spout	6"	0.5 GPM
21-431L	6" Wide Double Bend Spout	8-1/2"	1.8 GPM
21-432L	8-1/2" Wide Double Bend Spout	11"	1.8 GPM

## Universal Swing Spouts Less Aerators

- Double O-ring construction
- Fits all Krowne faucets & interchangeable with most brands; includes adapter to fit T&S Brass\* faucets
- 1"-20 UNEF thread
- For aerator options, see page 53



Model	Spout Size
21-420L-X	6" Swing Spout
21-421L-X	8" Swing Spout
21-422L-X	10" Swing Spout
21-423L-X	12" Swing Spout
21-424L-X	14" Swing Spout
21-425L-X	16" Swing Spout
21-427L-X	3-1/2" Wide Gooseneck Spout
21-428L-X	6" Wide Gooseneck Spout
21-429L-X	8-1/2" Wide Gooseneck Spout
21-430L-X	4-1/2" Wide Double Bend Spout
21-431L-X	6" Wide Double Bend Spout
21-432L-X	8-1/2" Wide Double Bend Spout

## 3/4" Full Flow Replacement Spouts

- Used on 18-8XXL faucets
- 1-1/4"-18 UNEF thread



Model	Spout Size
21-458L	6-1/2" Swing Full Flow Spout
21-460L	12" Swing Full Flow Spout
21-461L	14" Swing Full Flow Spout
21-463L	18" Swing Full Flow Spout
21-465L	18" Jointed Full Flow Spout
21-467L	24" Jointed Full Flow Spout

## Spout Extensions

- Adds flexibility to accommodate most swivel spout lengths
- Cannot be used on 3/4" full flow spout
- 1"-20 UNEF thread



Model	Spout Size
21-405L	6" Extension
21-404L	12" Extension
21-435L	24" Double Jointed Spout
21-469L	12" Full Flow Extension

## Replacement Spout with Shut-Off Valve

- Used on pot filler faucets
- 1"-20 UNEF thread

Model	Spout Size
21-441L	12" Swing
21-442L	6" Swing



## Rigid Gooseneck Spouts

- 3/8"-18 NPT male threading
- Comes with Teflon tape

\*Only compatible with Krowne Royal series faucets

Model	Spout Size	GPM
21-227L	3-3/4"W Spout	0.5
21-228L	5-3/4"W Spout	0.5
21-229L	8"W Spout	0.5



# Adapters & Vacuum Breakers

## Chemical Rigid Tee Assembly



- Fits most manufacturers
- Installs on pre-rinse bases
- 3/8" NPT close nipple
- 3/8" NPT female thread
- 3/8" NPT tee fitting on side
- Chrome plated brass

Model  
**21-545L**

## Chemical Swivel Tee Assembly



- Fits most manufacturers
- Installs on spout opening
- 3/8" NPT female tee fitting on side
- Spout fitting on top
- Chrome plated brass
- Adapter to fit T&S Brass\* included

Model  
**21-546L**

## Vacuum Breaker Assembly

- 6" centers
- Installs on backsplash
- 1/2" NPT male threads
- Adjustable flanges
- Polished chrome plated brass body



Model  
**21-455L**

## Vacuum Breaker

- Converts Royal Series faucet to utility spray or pot filler
- Fits onto standard size spout opening
- Hose attaches to outlet
- High water flow with minimal pressure loss
- Temperature 40°F -140°F
- Pressure 20-125 PSI



Model  
**21-450L**

## In-Line Vacuum Breaker

- Prevents back flow
- For hose thread faucets where pre-rinse or spray hoses are attached
- Prevents back flow of contaminated water into safe drinking water supply
- 3/8" NPS male inlet
- 3/8" NPS female outlet
- Connects to riser and faucet body



Model  
**21-109L**



## Spout on Pre-Rinse Body Adapter

- Rigid to swing adapter
- Allows conversion of faucets with 3/8" NPT female outlets to accept swing spouts or swivel gooseneck spouts

Model  
**21-110L**



## Pre-Rinse Hose to 1/2" NPT Male Adapter

- Converts pre-rinse hose to 1/2" Male fitting

Model  
**21-114L**



## Top of Riser (Rigid) to Swing Adapter

- Allows riser pipe to accommodate swing spout or swivel gooseneck spout
- 3/8" NPT female inlet

Model  
**21-115L**



## Swing to Riser Pipe Adapter for Pre-Rinse

- Allows conversion of faucets with swivel spouts to accept 3/8" NPT male riser pipes or rigid gooseneck spouts
- Wrench included
- Turns female to male thread

Model  
**21-118L**

## Spout Adapters

Model	Spout Size
<b>21-117L</b>	Spout Adapter for Chicago* Allows Krowne Spout to fit on Chicago* 00-47 Series Faucets
<b>21-125L</b>	Spout Adapter for Fisher* Allows Krowne Spout to fit on Fisher* Faucets
<b>21-524L</b>	Spout Adapter for Central Brass* Allows Krowne Spout to fit on Central Brass* 00-47 Series Faucets



## Pre-Rinse Hose to Top of Riser Adapter

Model	Spout Size
<b>21-112L</b>	Adapter for Fisher* Converts Pre-Rinse Hose to 1/4" Male fitting
<b>21-113L</b>	Adapter for Chicago* Converts Pre-Rinse Hose to 3/8" Male fitting



\*This product is not manufactured or authorized by any other manufacturer. Registered Trade Name or Mark of the original manufacturer of the product which this part fits, is not owned, associated or to be confused with our company.



# Lavatory Faucets

Used for restrooms, schools, hotels, medical offices, bars, restaurants and more. Water saving aerators and adjustable metering valves limit water consumption in high volume applications.

Shown above: 4" Deck Mount Faucet with Wrist Blade Handles 14-580L



## Faucet

Model	Description
14-510L	Single Hole Single Lever Lavatory Faucet

**NEW**

## Single Hole Single Lever Lavatory Faucet

- Ceramic cartridge valve with built-in temperature limit stop
- Single hole 3/8" NPS male inlet
- 1.5 GPM aerator installed
- Single lever handle
- Color coded index
- Solid chrome plated brass
- ADA compliant

### Replacement Parts

Model	Description
21-345L	Single Lever Ceramic Valve Repair Kit
21-346	Single Lever Handle
21-198L	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 53



ADA Compliant



**Faucet**  
**Model**      **Description**  
**14-550L**      Single Hole Single Lever Lavatory Faucet

### Single Hole Single Handle Lavatory Faucet

- Ceramic cartridge valve with metal stem
- Pre-installed 3/8" compression water lines
- 1.2 GPM aerator installed
- Single lever handle
- Chrome plated stainless steel
- ADA compliant

#### Replacement Parts

Model	Description
<b>21-344L</b>	Replacement Single Lever Valve
<b>21-195L</b>	13" Replacement Water Line Kit

For aerator options see page 53



**Faucet**  
**Model**      **Description**  
**14-570L**      4" Deck Mount Lavatory Faucet with Cast Spout

### MOST POPULAR

### 4" Deck Mount Lavatory Faucet with Cast Spout

- 1/4 Turn high-performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Lever handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

#### Replacement Parts

Model	Description
<b>21-308L</b>	Cold 1/4 Turn Ceramic Cartridge Valve
<b>21-309L</b>	Hot 1/4 Turn Ceramic Cartridge Valve
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 53



**Faucet**  
**Model**      **Description**  
**14-580L**      4" Deck Mount Lavatory Faucet with Wrist Blade Handles

### 4" Deck Mount Lavatory Faucet with Cast Spout and Wrist Blade Handles

- 1/4 Turn high-performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Vandal resistant wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

#### Replacement Parts

Model	Description
<b>21-333L</b>	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-334L</b>	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses
<b>21-313</b>	Vandal Resistant Wrist Blade Handle Kit

For aerator options see page 53





**Faucet**  
**Model**      **Description**  
**14-530L**      4" Deck Mount Metering Lavatory Faucet

### 4" Center Deck Mount Metering Lavatory Faucet

- Self-closing metering valves with adjustable timed flow (3-20 seconds)
- 1/2" NPS male inlets on 4" centers
- 2.2 GPM vandal resistant aerator installed
- Vandal resistant push button cap
- Solid chrome plated brass
- ADA compliant

#### Replacement Parts

Model	Description
<b>21-363L</b>	Metering Valve Repair Kit (Hot or Cold)
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 53



**Faucet**  
**Model**      **Description**  
**14-560L**      Single Hole Metering Lavatory Faucet

### Single Hole Deck Mount Metering Lavatory Faucet

- Single hole, single temperature
- Self-closing metering valves with adjustable timed flow (3-20 seconds)
- 1/2" NPS male inlet
- 2.2 GPM vandal resistant aerator installed
- Vandal resistant push button cap
- Solid chrome plated brass
- ADA compliant

#### Replacement Parts

Model	Description
<b>21-363L</b>	Metering Valve Repair Kit (Hot or Cold)

For aerator options see page 53



**Faucet**  
**Model**      **Description**  
**16-450L**      Single Hole Faucet with 5-5/8"W Rigid Gooseneck

### Single Hole Faucet with 5-3/4"W Rigid Gooseneck Spout

- 1/4 Turn high-performance ceramic cartridge valves w/ integral check
- 1-1/8" OD x 2-1/4" shank; fits 1-1/4" hole
- 20" water lines w/ 3/8" compression fittings
- 1.2 GPM aerator installed, 2.2 GPM aerator included
- Lever handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

#### Replacement Parts

Model	Description
<b>21-308L</b>	Cold 1/4 Turn Ceramic Cartridge Valve
<b>21-309L</b>	Hot 1/4 Turn Ceramic Cartridge Valve
<b>21-195L</b>	13" Replacement Water Line Kit
<b>21-311</b>	Wrist Blade Handle Kit
<b>21-227L</b>	3-3/4"W Rigid Gooseneck Spout
<b>21-228L</b>	5-3/4"W Rigid Gooseneck Spout
<b>21-229L</b>	8"W Rigid Gooseneck Spout

For aerator options see page 53





**NEW DESIGN**

**4" Center Deck Mount Lavatory Faucet with Cast Spout**

- Ceramic cartridge valve with built-in temperature limit stop
- ½" NPS male inlets on 4" centers
- 1.5 GPM aerator installed
- Single lever handle
- Includes optional plastic pop-up drain
- Color coded index
- Solid chrome plated brass
- ADA compliant
- Includes built-in water lines for fast and easy installation

**Faucet**

Model	Description
<b>14-521L</b>	4" Deck Mount Lavatory Faucet with Cast Spout, Includes Pop-Up Drain

**Replacement Parts**

Model	Description
<b>21-345L</b>	Single Lever Ceramic Valve Repair Kit
<b>21-346</b>	Single Lever Handle Repair Kit
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 53



ADA Compliant



**4" Center Deck Mount Lavatory Faucet with 3-¾" Wide Rigid Gooseneck Spout**

- ¼ Turn high-performance ceramic cartridge valves with integral check
- ½" NPS male inlets on 4" centers
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

**Faucet**

Model	Description
<b>14-546L</b>	4" Deck Mount Lavatory Faucet with 3-3/4"W Rigid Gooseneck

**Replacement Parts**

Model	Description
<b>21-333L</b>	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-334L</b>	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses
<b>21-311</b>	Wrist Blade Handle Kit
<b>21-227L</b>	3-3/4"W Rigid Gooseneck Spout
<b>21-228L</b>	5-3/4"W Rigid Gooseneck Spout
<b>21-229L</b>	8"W Rigid Gooseneck Spout

For spout and aerator options see pages 46 & 53



ADA Compliant





**Faucet**

Model	Description
<b>14-840L</b>	8" Deck Mount Lavatory Faucet with 5-3/4"W Rigid Gooseneck Spout

### 8" Deck Mount Lavatory Faucet with 5-3/4" Wide Rigid Gooseneck Spout

- 1/4 Turn high-performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 8" centers
- 1.2 GPM aerator installed, 2.2 GPM aerator included
- Wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

**Replacement Parts**

Model	Description
<b>21-333L</b>	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-334L</b>	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses
<b>21-311</b>	Wrist Blade Handle Kit

For aerator options see page 53



**Faucet**

Model	Description
<b>14-841L</b>	8" Deck Mount Lavatory Faucet with 8"W Rigid Gooseneck Spout

### 8" Deck Mount Lavatory Faucet with 8" Wide Rigid Gooseneck Spout

- 1/4 Turn high-performance ceramic cartridge valves with integral check
- 1/2" NPS male inlets on 8" centers
- Installed 1.2 and 2.2 GPM aerator included
- Wrist blade handles
- Color coded index
- Solid chrome plated brass
- ADA compliant

**Replacement Parts**

Model	Description
<b>21-333L</b>	Cold 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-334L</b>	Hot 1/4 Turn Ceramic Cartridge Valve Less Handle
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses
<b>21-311</b>	Wrist Blade Handle Kit

For aerator options see page 53



### Single Hole Wall Mount Self-Closing Basin Faucet

- Single hole, single temperature
- Self-closing twist valve
- 1/2" NPS male inlet
- 1.8 GPM aerator installed
- Cross handle with color coded index
- Solid chrome plated brass

Model	Description
<b>16-470L</b>	Single Hole Wall Mount Self-Closing Basin Faucet

# Lavatory Faucet Aerators/Outlets

- 55/64-27 female thread outlets
- 15/16" male thread outlets



Aerated Stream



Female



Male

## Aerators

### Female

Model	Flow Rate
<b>22-600L</b>	0.50 GPM Female Thread
<b>22-608L</b>	1.00 GPM Female Thread
<b>22-609L</b>	1.20 GPM Female Thread
<b>22-610L</b>	1.50 GPM Female Thread
<b>22-626L</b>	1.75 GPM Female Thread
<b>22-611L</b>	2.20 GPM Female Thread

### Male

Model	Flow Rate
<b>22-620L</b>	0.50 GPM Male Thread
<b>22-621L</b>	1.00 GPM Male Thread
<b>22-622L</b>	1.20 GPM Male Thread
<b>22-625L</b>	1.50 GPM Male Thread
<b>22-628L</b>	2.20 GPM Male Thread



Aerated Stream



Female



Male



Includes Install Key

## Aerators (Vandal Resistant)

### Female

Model	Flow Rate
<b>22-584L</b>	0.50 GPM Female Thread
<b>22-586L</b>	1.00 GPM Female Thread
<b>22-640L</b>	1.20 GPM Female Thread
<b>22-588L</b>	1.50 GPM Female Thread
<b>22-634L</b>	2.20 GPM Female Thread

### Male

Model	Flow Rate
<b>22-585L</b>	0.50 GPM Male Thread
<b>22-587L</b>	1.00 GPM Male Thread
<b>22-650L</b>	1.20 GPM Male Thread
<b>22-589L</b>	1.50 GPM Male Thread
<b>22-633L</b>	2.20 GPM Male Thread



Laminar Stream



Female



Male

## Laminar Flow Outlets

### Female

Model	Flow Rate
<b>22-592L</b>	0.50 GPM Female Thread
<b>22-594L</b>	1.50 GPM Female Thread

### Male

Model	Flow Rate
<b>22-591L</b>	0.50 GPM Male Thread
<b>22-593L</b>	1.50 GPM Male Thread



Laminar Stream



Female



Male



Includes Install Key

## Laminar Flow Outlets (Vandal Resistant)

### Female

Model	Flow Rate
<b>22-598L</b>	0.50 GPM Female Thread
<b>22-602L</b>	1.00 GPM Female Thread
<b>22-604L</b>	1.50 GPM Female Thread

### Male

Model	Flow Rate
<b>22-599L</b>	0.50 GPM Male Thread
<b>22-603L</b>	1.00 GPM Male Thread
<b>22-605L</b>	1.50 GPM Male Thread



Spray Stream



Female



Male

## Multi-Laminar Spray Outlets

### Female

Model	Flow Rate
<b>22-572L</b>	0.35 GPM Female Thread
<b>22-574L</b>	0.50 GPM Female Thread
<b>22-576L</b>	1.00 GPM Female Thread

### Male

Model	Flow Rate
<b>22-573L</b>	0.35 GPM Male Thread
<b>22-575L</b>	0.50 GPM Male Thread
<b>22-577L</b>	1.00 GPM Male Thread



Spray Stream



Female



Male



Includes Install Key

## Multi-Laminar Spray Outlets (Vandal Resistant)

### Female

Model	Flow Rate
<b>22-578L</b>	0.35 GPM Female Thread
<b>22-580L</b>	0.50 GPM Female Thread

### Male

Model	Flow Rate
<b>22-579L</b>	0.35 GPM Male Thread
<b>22-581L</b>	0.50 GPM Male Thread

## Garden Hose Adapters



Female



Male

### Female Garden Hose Adapter

Model	Description
<b>22-632L</b>	Female Garden Hose Adapter

### Male Garden Hose Adapter

Model	Description
<b>22-631L</b>	Male Garden Hose Adapter

# Electronic Sensor Faucets


These water conservers, reduce the spread of illness or infection, and prevent cross contamination. Our uniquely designed faucets are easy to install, maintain and include a 3 year warranty.

Shown below: Single Hole Deck Mount Faucet 16-654



FaucetFlex<sup>®</sup>  
BY KROWNE

WHEN FLEXIBILITY MEETS INNOVATION



[krowne.com/faucetflex](https://krowne.com/faucetflex)

## Diamond Series Electronic Sensor Faucets

DIAMOND<sup>™</sup>  
series



### 4" Center Wall Mount with Satin Finish

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Easy adjust shut-off delay, auto flush, auto time-out and range sensitivity
- Low battery indicator light
- 2.2 GPM aerator installed
- Includes 0.5 GPM aerator, control module, mechanical mixing valve & (3) supply hoses
- Replacement spouts available

#### Replacement Spouts

Model	Description
<b>21-433L</b>	4-1/2" Satin Finish Double Bend

#### Replacement Aerators

Model	Description
<b>22-671L</b>	1.0 GPM Honeycomb Aerator
<b>22-672L</b>	2.2 GPM Honeycomb Aerator

Model  
**16-670**



DIAMOND<sup>™</sup>  
series



### Single Hole Wall Mount with Satin Finish

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Easy adjust shut-off delay, auto flush, auto time-out and range sensitivity
- Low battery indicator light
- 2.2 GPM installed, 0.5 GPM included, control module, mechanical mixing valve & (3) supply hoses

Model  
**16-675**

### Single Hole Wall Mount

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 2.2 GPM aerator installed, 0.5 GPM included
- Includes control module, mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

Model	Description
<b>16-190</b>	4-1/2" Wide Gooseneck Spout
<b>16-191</b>	6" Wide Gooseneck Spout



### 4" Center Deck Mount with Cast Spout

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 2.2 GPM aerator installed, 0.5 GPM installed
- Includes control module, mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

Model  
**16-197**





ADA Compliant

### Single Hole Deck Mount

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 0.5 GPM installed
- Includes mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

**Model**  
**16-654**



ADA Compliant

### Single Hole Deck Mount with Deck Plate

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 0.5 GPM installed
- Includes mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

Model	Description
<b>16-654P</b>	Includes 4" Deck Plate
<b>16-654P8</b>	Includes 8" Deck Plate



ADA Compliant

### Single Hole Deck Mount with Cast Spout

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 2.2 GPM aerator installed, 0.5 GPM included
- Includes mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

**Model**  
**16-196**



ADA Compliant

### Single Hole Deck Mount with Cast Spout & Deck Plate

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 2.2 GPM aerator installed, 0.5 GPM included
- Includes mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

Model	Description
<b>16-196P</b>	Includes 4" Deck Plate
<b>16-196P8</b>	Includes 8" Deck Plate

## Built-in Control Module Electronic Sensor Faucets



### 4" Centerset Above Deck Mount Faucet **NEW**

- Infrared sensor operated
- Built-in battery powered control module (batteries not included)
- Uses (4) AA alkaline batteries
- Low battery indicator light
- 30 seconds auto shut-off
- 0.5 GPM aerator installed
- Solid chrome plated brass
- Includes mechanical mixing valve, (3) supply hoses, and 1/2" x 1/2" screen adaptor

**Model**  
**16-645**



### Single Hole Deck Mount Angled Faucet

- Infrared sensor operated
- Built-in battery powered control module (batteries not included)
- Uses (4) AAA alkaline batteries
- Low battery indicator light
- 30 seconds auto shut-off
- 2.2 GPM aerator installed, 0.5 GPM included
- Includes mechanical mixing valve, (3) supply hoses, and 1/2" x 1/2" screen adaptor
- Solid chrome plated brass

**Model**  
**16-656**



### Single Hole Wall Mount Straight Faucet

- Infrared sensor operated
- Built-in battery powered control module (batteries not included)
- Uses (4) AAA alkaline batteries
- Low battery indicator light
- 30 seconds auto shut-off
- 2.2 GPM aerator installed, 0.5 GPM included
- Includes mechanical mixing valve, (3) supply hoses, and 1/2" x 1/2" screen adaptor
- Solid chrome plated brass

**Model**  
**16-655**



**16-649**

**16-650**

### Single Hole Deck Mount with Rigid Gooseneck Spout

- Infrared sensor operated
- Battery powered control module, (4) AA batteries included, AC adapter optional
- Low battery indicator light
- 1.5 GPM installed, 0.5 GPM included
- Includes control module, mechanical mixing valve & (3) supply hoses
- Solid chrome plated brass

#### 4-1/2"W Rigid Gooseneck Spout

Model	Description
<b>16-649</b>	Faucet
<b>16-649P</b>	Faucet with 4" Deck Plate
<b>16-649P8</b>	Faucet with 8" Deck Plate

#### 6"W Rigid Gooseneck Spout

Model	Description
<b>16-650</b>	Faucet
<b>16-650P</b>	Faucet with 4" Deck Plate
<b>16-650P8</b>	Faucet with 8" Deck Plate

# Electronic Faucet Replacement Parts & Accessories



**Control Module**

Model  
**16-198**



**Mechanical Mixing Valve with Built-in Check Valve**

Model  
**16-402L**



**Thermostatic Mixing Valve with Built-in Check Valves**

- 1070 ASSE approved

Model  
**16-405L**



**AC Adapter**

- 120 volts
- 2 amps or less
- Eliminates the need for batteries
- 6" long

Model  
**16-199**



**Water Supply Hoses for Electronic Faucets**

- Feeds water from water supply to mixing valve
- 1/2" female NPS x 3/8" compression
- (2) 18" hoses included

Model  
**16-510**



**Spout Supply Hose for Wall Mount Electronic Faucets**

- Fits wall mount e-faucets
- Feeds water from mixing valve to faucet
- (1) 18"L water supply hose
- 3/8" female NPS x 1/2" female NPS

Model  
**16-512**



**Spout Supply Hose for Deck Mount Electronic Faucets**

- Fits deck mount e-faucets (except 16-654)
- Feeds water from mixing valve to faucet
- (1) 18"L water supply hose
- 1/4" female NPS x 1/2" female NPS

Model  
**16-511**



**Spout Supply Hose for 16-654 Faucet**

- Fits 16-654 faucet
- Feeds water from mixing valve to faucet
- (1) 18"L water supply hose
- 3/8" female NPS x 1/2" female NPT

Model  
**16-517**

**Sensors with Cable**



Model	Description	Fits Models
<b>16-505</b>	Flat Sensor	16-190, 16-191, 16-197, 16-670
<b>16-506</b>	Convex Sensor	16-196, 16-649, 16-650, 16-654

**Deck Plates**

- Fits all Krowne single hole deck mount electronic faucets



Model	Description
<b>16-189</b>	4" Deck Plate
<b>16-186</b>	8" Deck Plate

**Hydro Generator**

- Generates power by using the water flow
- No AC power required
- Eliminates the need for batteries



Model  
**16-501**

# Electronic Faucet Replacement Parts & Accessories



Includes 34 oz. reservoir

## Electronic Sensor Deck Mount Soap Dispenser NEW

- Automatic foaming soap dispenser
- Chrome finish
- 12V DC - 6V adapter included
- 1 second dispensing time
- 34 oz. reservoir
- Requires the use of AC power

Model  
**16-657**



## Deck Mount Soap Dispenser

- Fits in 1-1/8" Hole
- 13 oz. reservoir

Model  
**H-101**

## Daisy Chain for Electronic Faucets

- Connect multiple electronic faucets to one power source using our daisy chain parts and accessories



## Box Mount Transformer

- Box mounted power converter to power up to 8 electronic faucets
- For use with 16-513 Daisy Chain Extension Cable
- For use with 16-514 5 ft. Long Extension Cable

Model  
**16-516**



## AC Adapter for Daisy Chain

- Provides power for up to 8 electronic faucets
- For use with 16-513 Daisy Chain Extension Cable
- For use with 16-514 5' Long Extension Cable

Model  
**16-199**



## Daisy Chain Extension Cable

- For connecting up to 8 electronic sensor faucets to a single power supply
- For use with 16-514 5'L Extension Cable
- For use with 16-515 AC Adapter for Daisy Chain
- For use with 16-516 Box Mount Transformer

Model  
**16-513**



## 5 ft. Extension Cable

- 5' long wire provides additional length
- For use with 16-513 Daisy Chain Extension Cable
- For use with 16-515 and 16-199 AC Adapters
- For use with 16-516 Box Mount Transformer

Model  
**16-514**



SILVER  
SERIES

# Plumbing

Built for mid to high volume applications. Engineered to combine quality and value resulting in a healthy balance geared for most environments. Competitively priced and available in over 100 different configurations.

Shown above: Service Sink Faucet with Cast Spout 16-281

## 4" Center Wall Mount Faucet

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Chrome plated finish



10-406L

Model	Spout Size	Case Qty
10-406L	6" Swing	20
10-410L	10" Swing	20
10-400L	3-1/2" Wide Gooseneck (0.5 GPM)	20
10-400L-W	3-1/2" Wide Gooseneck (0.5 GPM) with Wrist Blade Handles	-

### Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 46 & 53

## 4" Center Wall Mount Faucet with Double Bend Spout

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 0.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Chrome plated finish



10-435L

Model	Spout Size	Case Qty
10-435L	4-1/2"W Double Bend Spout	20
10-435L-W	4-1/2"W Double Bend Spout with Wrist Blade Handles	-

### Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-443L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 46 & 53

## 8" Center Wall Mount Faucet

- ¼ Turn ceramic valves
- ½" NPT female inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Chrome plated finish

Model	Spout Size	Case Qty
12-806L	6" Swing	12
12-808L	8" Swing	12
12-810L	10" Swing	12
12-812L	12" Swing	12
12-814L	14" Swing	12
12-816L	16" Swing	12
12-818L	18" Jointed	12
12-824L	24" Jointed	12
12-801L	6" Wide Gooseneck	12
12-802L	8-1/2" Wide Gooseneck	12
12-8XXL	Faucet Body (No Spout)	12



### Replacement Parts

Model	Description
21-310L	1/4 Turn Ceramic Valve Kit
21-445L	E-Z Install Flexible Water Line Kit

For spout and aerator options see pages 46 & 53

## 4" Center Deck Mount Faucet

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Chrome plated finish



### Faucets

Model	Spout Size
11-406L	6" Swing Spout
11-412L	12" Swing Spout
11-400L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
11-401L	6" Gooseneck Spout
11-450L	Laundry Faucet w/ Hose Adapter

### Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

## 4" Center Deck Mount Faucet With Double Bend Spout

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Chrome plated finish



### Faucets

Model	Spout Size
11-435L	4-1/2" Wide Double Bend (0.5 GPM)
11-460L	6" Wide Double Bend

### Replacement Parts

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

## 4" Center Deck Mount Faucet with Wrist Blade Handles

- ¼ Turn ceramic valves
- ½" NPS male inlets on 4" centers
- 0.5 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Wrist blade handles
- Chrome plated finish



11-400L-W

### Faucet

Model	Spout Size
<b>11-400L-W</b>	3-1/2" Wide Gooseneck Spout (0.5 GPM)

### Replacement Parts

Model	Description
<b>21-300L</b>	1/4 Turn Ceramic Valve Kit
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses
<b>21-312</b>	Silver Series Wrist Blade Handle Kit

For aerator options see page 53

## 4" Center Deck Mount Single Lever Faucet

- Ceramic cartridge valve
- ½" NPS Inlets w/ 3/8" OD flexible copper tubing
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Single lever handle
- Color coded index
- Chrome plated finish

**Model**  
**12-510L**



### Replacement Parts

Model	Description
<b>21-340L</b>	Single Lever Ceramic Valve Repair Kit
<b>21-341</b>	Single Lever Ceramic Valve Handle
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses
<b>12-512</b>	Pop-Up Drain (fits 12-510L)

For aerator options see page 53

## 4" Center Deck Mount Single Lever Faucet with Pop-Up Drain

- Ceramic cartridge valve
- ½" NPS Inlets w/ 3/8" OD flexible copper tubing
- 0.5 GPM aerator installed, 1.5 GPM aerator included
- Single lever handle
- Color coded index
- Chrome plated finish

**Model**  
**12-525L**



Pop-Up Drain included

### Replacement Parts

Model	Description
<b>21-340L</b>	Single Lever Ceramic Valve Repair Kit
<b>21-341</b>	Single Lever Ceramic Valve Handle
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses

For aerator options see page 53



**Faucets**

Model	Description
16-350L	Kitchen Faucet with Sprayer
16-351L	Kitchen Faucet Only (No Sprayer)

**Kitchen Faucet with Sprayer**

- Ceramic cartridge valve with metal stem
- Pre-installed 3/8" compression water lines
- 1.8 GPM aerator installed
- Single lever handle
- Chrome plated brass

**Replacement Parts**

Model	Description
16-352L	Sprayer Only
21-344L	Replacement Single Lever Valve
21-195L	13" Replacement Water Line Kit

**8" Center Deck Mount Faucet**

- 1/4 Turn ceramic valves
- 1/2" NPS male inlets on 8" centers
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handles
- Chrome plated finish



**Faucets**

Model	Spout Size
13-806L	6" Swing Spout
13-808L	8" Swing Spout
13-810L	10" Swing Spout
13-812L	12" Swing Spout
13-814L	14" Swing Spout
13-816L	16" Swing Spout
13-818L	18" Jointed Spout
13-824L	24" Jointed Spout
13-801L	6" Wide Gooseneck Spout
13-802L	8-1/2" Wide Gooseneck Spout
13-8XXL	No Spout - Body Only

**Replacement Parts**

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit
21-198L	1/2" x 3/8" Braided Supply Hoses

For spout and aerator options see pages 46 & 53

**Single Hole Deck Mount Pantry Faucet**

- Single hole, single temperature
- 1/4 Turn ceramic valves
- 1/2" NPS male inlet
- 1.8 GPM aerator installed
- Durable full range swing spout with double O-ring construction
- Lever handle
- Chrome plated finish



**Faucets**

Model	Spout Size
16-108L	6" Swing Spout
16-109L	12" Swing Spout
16-115L	3-1/2" Wide Gooseneck Spout (0.5 GPM)
16-116L	6" Wide Gooseneck Spout

**Replacement Parts**

Model	Description
21-300L	1/4 Turn Ceramic Valve Kit

For spout and aerator options see pages 46 & 53

## Service Sink Faucet with Cast Spout

- Flanges with eccentric fittings for quick installations
- 6-1/2" heavy cast spout with pail hook and hose thread
- Includes wall bracket for spout support
- 1/4 turn ceramic valves
- 1/2" NPT male inlets on 8" centers
- Mounting kit included
- Solid rough chrome brass base
- Vacuum Breaker Spout



### Faucets

Model	Spout Size
16-281	Heavy Duty Service Sink Faucet with 6-1/2" Spout
16-290	Medium Duty Service Sink Faucet with 6-1/2" Spout

### Replacement Parts

Model	Description
21-308L	Cold 1/4 Turn Ceramic Cartridge Valve for 16-281
21-309L	Hot 1/4 Turn Ceramic Cartridge Valve for 16-281
21-310L	Hot & Cold 1/4 Turn Ceramic Cartridge Valves for 16-290
16-282	Replacement Wall Bracket for 16-281
16-283	Vacuum Breaker Repair Kit
21-311	Wrist Blade Handle Kit
21-443L	E-Z Install Flexible Water Line Kit



## Floor Mop Sink

- 3-1/2" drain with 2" IPS outlet
- 18 gauge stainless steel
- Wall bracket, drain & mounting hardware included

Model	Overall Size	Bowl Size
MS-2424	24" x 24" x 13"	21" x 21" x 9"
MS-1818	18" x 18" x 13"	15" x 15" x 9"

### Replacement Parts

Model	Description
23-145	Replacement Drain



## Mop Hangers

- Stainless steel construction with spring action grips
- MH-24 size: 23"L x 4-1/2"H
- MH-5 size: 5"L x 4-1/2"H
- MH-5 includes 30" rubber hose with 3/4" garden hose inlet

Model	Description
MH-24	Mop Hanger with 3 Grips
MH-5	Mop Hanger with 1 Grip (Includes hose)

# Replacement Valves & Handles



**NEW**

## Silver Series Single Hole Deck Mount Pantry Faucet Less Spout

- Silver Series single hole deck mount faucet
- Single hole, single temperature
- 1/4 turn ceramic valves
- 1/2" NPS male inlet
- Lever handle
- Chrome plated finish

Model  
**16-1XXL**



## Silver Series 1/4 Turn Ceramic Valve Repair Kit (10-4, 11-4, 13-8 Series)

- Fits all 10-4, 11-4, and 13-8 series faucets
- Includes (1) hot and (1) cold ceramic valve set with handles
- Fully assembled, easy to install

Model  
**21-300L**



## Silver Series 1/4 Turn Ceramic Valve Repair Kit (12-8 Series)

- Fits all 12-8 series faucets
- Includes (1) hot and (1) cold ceramic valve set with handles
- Fully assembled, easy to install

Model  
**21-310L**



## Silver Series Lever Handle Kit

- Fits all Krowne faucets
- Lever style
- Contains (2) screws, (2) handles, and hot & cold indicator
- Solid chrome plated brass

Model  
**21-305**



## Silver Series Wrist Blade Handle Kit

- Fits all Silver Series faucets
- 4" length
- Contains (2) screws, (2) handles, and hot & cold indicator
- Solid chrome plated brass

Model  
**21-312**



## Silver Series Compression Valve Repair Kit (Old Style 10-4, 11-4, 13-8 Series)

- Fits old style 10-4, 11-4, and 13-8 series faucets
- Includes (1) hot and (1) cold compression valve set with handles
- Fully assembled, easy to install

Model  
**21-325L**




## Silver Series Compression Valve Repair Kit (Old Style 12-8 Series)

- Fits old style 12-8 series
- Includes (1) hot and (1) cold compression valve set with handles
- Fully assembled, easy to install

Model  
**21-355L**

## Replacement Parts

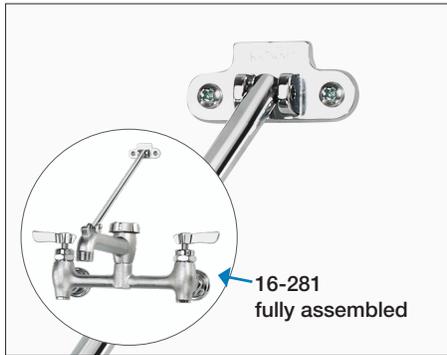

**NEW**

### Silver Series Replacement Wall Bracket for 16-281 Service Sink Faucet

- Replacement wall bracket for 16-281 service sink faucet
- Faucet not included

Model	Description
<b>16-282</b>	Wall Bracket for 16-281
<b>16-283</b>	Vacuum Breaker for 16-281 & 16-290



### Silver Series Coupling Flanges

- Fits 12-8 Silver Series 8" center wall mount faucet
- 1/2" NPT female inlet
- Two rubber washers

**Model**  
**21-400L**

### Replacement Washer Set

- 12 pcs. per set
- Fits Silver Series coupling flanges

**Model**  
**20-302**



## Spouts



### Swing Spouts

- Fits Krowne Silver Series Faucets

Model	Spout Size	Flow Rate
<b>19-220L</b>	6" Swing Spout	1.8 GPM
<b>19-221L</b>	8" Swing Spout	1.8 GPM
<b>19-222L</b>	10" Swing Spout	1.8 GPM
<b>19-223L</b>	12" Swing Spout	1.8 GPM
<b>19-224L</b>	14" Swing Spout	1.8 GPM
<b>19-225L</b>	16" Swing Spout	1.8 GPM



### Gooseneck & Jointed Spouts

- Fits Krowne Silver Series Faucets

Model	Spout Size	Height	Flow Rate
<b>19-226L</b>	18" Jointed Spout	-	1.8 GPM
<b>19-227L</b>	3-1/2"W Gooseneck	7-1/4"	0.5 GPM
<b>19-228L</b>	6"W Gooseneck	8-1/2"	1.8 GPM
<b>19-229L</b>	8-1/2"W Gooseneck	10"	1.8 GPM

# Drains

Twist, Lever and Rotary Waste Valve styles are available plus Standard kitchen and bar sink drains with optional overflows. Our durable materials resist harsh conditions in commercial settings. Most are universal for reliable easy install.



**NEW**

# RotoPro Ball Valve Waste Drains

Features apply to all RotoPro Ball Valve Waste Drains

- Premium stainless steel ball valve design engineered for long-lasting performance
- Elimination of traditional rubber gasket to prevent leaks and withstand harsh conditions and chemicals
- Smooth, ¼ turn action for ease-of-use
- Overall lower maintenance costs due to ball valve design
- Universal 2" NPS male threaded drain outlet and 1-1/2" female threaded drain outlet



Stainless Steel Ball Valve shown closed      Stainless Steel Ball Valve shown halfway open      Stainless Steel Ball Valve shown open



**DIAMOND**  
series



## RotoPro Stainless Steel 3-½" Ball Valve Waste Drain

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Stainless steel body
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain

**Model**  
**22-850**



**DIAMOND**  
series

## RotoPro Stainless Steel 3-½" Ball Valve Waste Drain, Short Handle

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Stainless steel body
- Shorter handle length
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain

**Model**  
**22-850-S**



**ROYAL**  
SERIES

## RotoPro Nickel Plated Cast Bronze 3-½" Ball Valve Waste Drain

- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet with cap
- Nickel plated cast bronze body
- Stainless steel ball valve
- Includes vandal resistant screw for strainer
- Approximately 2-3 times the drain rate of a conventional lever waste drain

**Model**  
**22-800**

### Replacement Parts for RotoPro Ball Valve Waste Drains

Model	Description
<b>22-508</b>	Repair Kit - Rubber & PVC Gaskets
<b>22-509</b>	Replacement Overflow Cap
<b>22-517</b>	Repair Kit - Ball Valve

Model	Description
<b>22-532</b>	Handle Replacement for 22-850
<b>22-533</b>	Short Handle Replacement for 22-850-S
<b>22-534</b>	Handle Replacement for 22-800

# Waste Drains

## 3-1/2" Twist Waste Drain

- Fits 3-1/2" sink opening
- 2" NPS male threaded / 1-1/2" female threaded drain outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model	Case Qty.
22-204	12



**MOST POPULAR**



## 3-1/2" Lever Waste Drain

- Fits 3-1/2" sink opening
- 2" NPS male threaded / 1-1/2" female threaded drain outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model	Case Qty.
22-404	12



## 3" Twist Waste Drain

- Fits 3" sink opening
- 2" NPS male threaded / 1-1/2" female threaded drain outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model	Case Qty.
22-201	12



## 3-1/2" Lever Waste Drain with Short 6" Handle

- Fits 3-1/2" sink opening
- 2" NPS male threaded / 1-1/2" female threaded drain outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model
22-404-S



## 3-1/2" Twist Waste Drain with Short 6" Handle

- Fits 3-1/2" sink opening
- 2" NPS male threaded / 1-1/2" female threaded drain outlet
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle

Model
22-204-S



## Installation Tool for Twist & Lever Waste Drains

**NEW**

- Fits RotoPro
- Heavy duty

Model	Description
22-539	RotoPro Waste Drain Service Tool
22-540	Waste Drain Installation Tool



1-1/2" Female  
2" Male

**Universal Drain Connection**  
on all Krowne Waste Drains

# Waste Drain Replacement Parts & Accessories

## Twist Waste Drain Kit

- Includes 3-1/2" Twist Waste Valve (22-204), Overflow Head (22-500) & Overflow Elbow (22-501)
- 2" NPS male threaded / 1-1/2" female threaded drain outlet
- Fits 3-1/2" sink opening
- 1-1/4" overflow outlet
- Stainless steel strainer, flange and handle




22-507  
fully assembled

**Model**  
**22-507**

## Optional Overflow Head and Elbow

- 2" cut-out in sink required for overflow head
- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available



Model	Description
22-500	Overflow Head
22-501	Overflow Elbow
22-504	Head & Overflow Kit

## Replacement Face Strainer

- Fits all manufacturers



Model	Description
22-516	Fits 3" Sink Opening
22-616	Fits 3-1/2" Sink Opening
22-870	Stainless Steel Strainer Basket for RotoPro Drains Only

## Replacement Face Flange

- Fits all manufacturers
- Stainless steel construction



Model	Description
22-515	Fits 3" Sink Opening
22-615	Fits 3-1/2" Sink Opening

## Replacement Stopper



- O-ring creates watertight seal
- Fits most brands

Model	Description
22-530	Complete Stopper
22-519	O-ring Only

## Replacement Overflow Cap

- Fits all twist and rotary waste drains
- Nickel plated brass



**Model**  
**22-505**

## Reducer

- Converts 2" NPS fitting on all waste drains to 1-1/2" NPS male
- Nickel plated brass
- Fits all twist and rotary waste drains



**Model**  
**22-503**

## Lever Handle Assembly



- Fits all lever waste valves

Model	Description
22-528	Lever Handle Assembly
22-528-S	Lever Short Handle Assembly

## Twist Handle Assembly



- Fits all twist waste valves

Model	Description
22-529	Twist Handle Assembly
22-529-S	Twist Short Handle Assembly

## Twist & Lever Drain Repair Kit

- Fits most brands
- Fits all waste drains
- Not for ball valve drains



**Model**  
**22-502**

## 3-1/2" Stainless Steel Drains



Model  
23-123

### Standard Kitchen Sink Drain

- For 3-1/2" sink opening
- 4-1/2" top diameter
- 1-1/2" NPS male
- Locknut and washer included
- Stainless steel with metal post
- Used on all kitchen sinks



### Fixed Metal Post Basket

- Fits 3-1/2" kitchen drains
- Fits Krowne drain models 23-123 and 23-130
- Does not plug drain

Model  
23-153



### Movable Metal Post Basket

- Fits 3-1/2" kitchen drains
- Fits Krowne drain models 23-123 and 23-130
- Plugs drain

Model  
23-138



Model  
23-130

### Long Shank Stainless Steel Sink Strainer

- Stainless steel construction
- Fits 3-1/2" - 4" sink openings
- 4-1/2" flange
- Deep basket for added capacity
- Brass nut on bottom



### Strainer Basket

- Fits 3-1/2" kitchen drains
- Does not stop water flow

Model  
23-159

## 1-1/2" Stainless Steel Drains



Model  
23-121

### 1-1/2" Full Flange Stainless Steel Drain

- For 1-1/2" sink opening
- 2-1/2" top diameter
- 1-1/2" NPT male
- Locknut and washer included
- Used on Krowne "HS" hand sinks



Model  
23-122

### 1-1/2" Cut Flange Stainless Steel Drain

- For 1-1/2" sink opening with small flange
- 2-1/2" top diameter
- 1-1/2" NPT male
- Locknut and washer included
- Fits all Krowne sinks 2017 and present
- Fits all manufacturers



Model  
23-152

### 1-1/2" Replacement Basket

- Fits 1-1/2" stainless steel drains
- Fits Krowne drain models 23-121 and 23-122
- Used for HS models

### 1" Plastic Drain

NEW

- Fits 1-3/8" opening
- 1" NPS male thread
- 2" flange size
- 1-1/2" long
- Locknut and washer included
- Prevents sweating



Model  
23-111-A

## Ice Bin Drains

Drain Kit for Ice Bins Without Cold Plates



- Includes plastic drain, washer & locknut with extended collar

Model  
23-118

1/2" x 6" Tailpiece for Ice Bins with Cold Plates



Model  
KR-CPN6

## Heavy Cast Drains



Model  
23-110

### 1/2" Nickel Plated Brass Drain

- Fits 15/16" opening
- 1/2" NPS male thread
- 1-1/8" flange size
- 1-1/2" long
- Locknut and washer included



Model  
23-111

### 1" Nickel Plated Brass Drain

- Fits 1-3/8" opening
- 1" NPS male thread
- 2" flange size
- 1-1/2" long
- Locknut and washer included



Model  
23-120

### 1-1/4" Slanted Top Drain (Krowne 1997 to 2016)

- For 1-1/4" sink and ice bin openings
- Tapered top
- 1" NPT male thread
- Locknut and washer included
- Uses 23-155 overflow

# Overflow Pipes

**MOST POPULAR**



## 1-1/2" Metal Overflow Pipe for Bar Sinks

- 1-1/2" overflow pipe
- Fits most manufacturers
- 8-1/2" overall height
- 7" pipe length, 3/4" diameter

**Model**  
**23-156**

Fits 1-1/2" Drains



23-121      23-122



## Universal Stainless Overflow Pipe for Bar Sinks

- Fits all 1", 1-1/4" and 1-1/2" drains
- Heavy duty rubber grommet
- 8-1/2" overall height
- 7" pipe length, 3/4" diameter

**Model**      **Case Qty.**  
**23-151**      **12**

Fits 1", 1-1/4" and 1-1/2" Drains



23-111      23-120      23-121



## Universal Plastic Overflow Pipe for Bar Sinks

- Fits all 1", 1-1/4" and 1-1/2" drains
- Heavy duty rubber grommet
- 8-1/2" overall height
- 7" pipe length, 3/4" diameter

**Model**      **Case Qty.**  
**23-150**      **12**

Fits 1", 1-1/4" and 1-1/2" Drains



23-111      23-120      23-121



## 1-1/4" Metal Overflow Pipe for Bar Sinks

- 1-1/4" overflow pipe
- Fits old style Krowne slanted top drains
- 8-1/2" overall height
- 7" pipe length, 3/4" diameter

**Model**  
**23-155**

Fits 1-1/4" Slanted Top Drains



23-120



## 1" Metal Overflow Pipe for Bar Sinks

- 1" overflow pipe
- Fits 1" drains
- 8-1/2" overall height
- 7" pipe length, 3/4" diameter

**Model**  
**23-154**

Fits 1" Drain



23-111

# Specialty Products

We offer a wide range of **foodservice plumbing** to help better serve the market's unique needs. Our large inventory of Wok Faucets, Pot Fillers, Utility Sprays and Equipment Casters are ready to ship same day.



# Grease Filters

All Krowne Grease Filters are UL listed (UL 1046 & ULC-S649) and are intended to be used with restaurant-type cooking equipment installed in accordance with ANSI/NFPA 96, "Ventilation Control and Fire Protection of Commercial Cooking Operations", the "International Mechanical Code", "International Fire Code", "ANSI/NFPA 1", "Fire Code", or the "Uniform Mechanical Code".


## Royal Series Grease Filters

- Rounded baffles are easier to clean, stronger, and allow for more efficient air flow
- Heavy duty gauge stainless steel
- All filters are 2" deep
- Dishwasher safe
- Built-in handles for easy install and removal
- Fully interchangeable with existing filters

Model	Construction	Size
<b>RS1616</b>	Stainless Steel	16"H x 16"W
<b>RS1620</b>	Stainless Steel	16"H x 20"W
<b>RS1625</b>	Stainless Steel	16"H x 25"W
<b>RS2020</b>	Stainless Steel	20"H x 20"W
<b>RS2025</b>	Stainless Steel	20"H x 25"W
<b>RS2520</b>	Stainless Steel	25"H x 20"W




- NOTE:**
- Must order in complete cases (multiples of six)
  - Cannot mix and match sizes

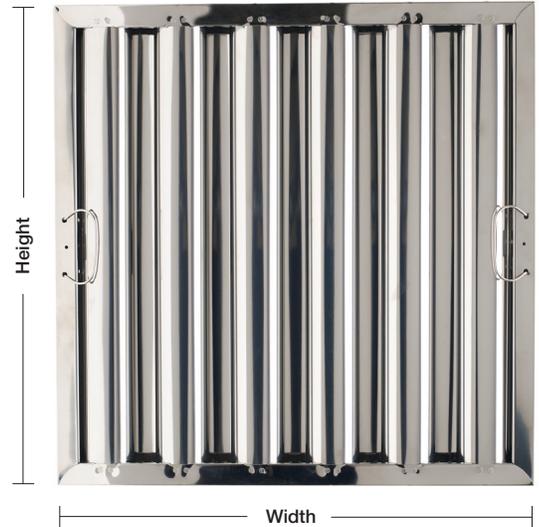

## Silver Series Grease Filters

- All filters are 2" deep
- Built-in handles for easy install and removal
- Fully interchangeable with existing filters

- NOTE:**
- Must order in complete cases (multiples of six)
  - Cannot mix and match sizes

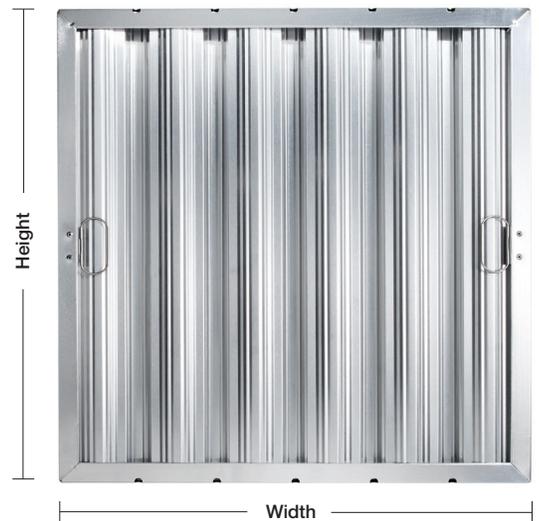

Model	Construction	Size
<b>A1616</b>	Aluminum	16"H x 16"W
<b>A1620</b>	Aluminum	16"H x 20"W
<b>A1625</b>	Aluminum	16"H x 25"W
<b>A2016</b>	Aluminum	20"H x 16"W
<b>A2020</b>	Aluminum	20"H x 20"W
<b>A2025</b>	Aluminum	20"H x 25"W
<b>A2520</b>	Aluminum	25"H x 20"W

Model	Construction	Size
<b>G1616</b>	Galvanized Steel	16"H x 16"W
<b>G1620</b>	Galvanized Steel	16"H x 20"W
<b>G1625</b>	Galvanized Steel	16"H x 25"W
<b>G2016</b>	Galvanized Steel	20"H x 16"W
<b>G2020</b>	Galvanized Steel	20"H x 20"W
<b>G2025</b>	Galvanized Steel	20"H x 25"W
<b>G2520</b>	Galvanized Steel	25"H x 20"W

Model	Construction	Size
<b>S1616</b>	Stainless Steel	16"H x 16"W
<b>S1620</b>	Stainless Steel	16"H x 20"W
<b>S1625</b>	Stainless Steel	16"H x 25"W
<b>S2016</b>	Stainless Steel	20"H x 16"W
<b>S2020</b>	Stainless Steel	20"H x 20"W
<b>S2025</b>	Stainless Steel	20"H x 25"W
<b>S2520</b>	Stainless Steel	25"H x 20"W

# HydroSift™ Water Filters

by Krowne

Our foodservice bacteriostatic water filters diminishes limescale, reduces chlorine/chloramine, eliminates bad tastes and odor resulting in clean safe water which is ready to serve to your customers.



## Triple Filter Assembly Kit

- Includes triple filter assembly with mounting bracket, (2) cartridge filters, (1) sediment cartridge filter, (3) male to male nipple fittings, male to female ball valve, reducing bushing, female tee fitting, pressure gauge and filter wrench
- 3/4" NPT water in and out connections
- 3.0 GPM max flow rate
- 20,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° - 160°F operating temperature

Model  
**KR-HS3-KIT**



## Twin Filter Assembly Kit

- Includes twin filter assembly with mounting bracket, (1) cartridge filter, (1) sediment cartridge filter, (2) male to male nipple fittings, male to female ball valve, reducing bushing, female tee fitting, pressure gauge and filter wrench
- 3/4" NPT water in and out connections
- 3.0 GPM max flow rate
- 15,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° - 160°F operating temperature

Model  
**KR-HS2-KIT**



## Single Filter Assembly Kit

- Includes single filter assembly with mounting bracket, (1) cartridge filter, (1) male to male nipple fitting, male to female ball valve, reducing bushing, female tee fitting, pressure gauge and filter wrench
- 3/4" NPT water in and out connections
- 3.0 GPM max flow rate
- 10,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° - 160°F operating temperature

Model  
**KR-HS1-KIT**

## Single Assembly with Filter Cartridge

- Includes single filter assembly with bracket, (1) cartridge filter
- 3/4" NPT water in and out connections
- 3.0 GPM max flow rate
- 10,000 gallon capacity
- 20-100 PSI non-shock working pressure (1.38-6.89 bar)
- 35° - 160°F operating temperature



Model  
**KR-HSA**

## Filter Cartridge

- Bacteriostatic filter
- Diminishes limescale, reduces chlorine/chloramine, eliminates bad taste & odor
- For use in Single, Twin and Triple Filter Assemblies



Model  
**KR-FC**

## Sediment Filter Cartridge

- Reduces sediment and silt
- For use in Twin and Triple Filter Assemblies



Model  
**KR-SF**

### REPLACEMENT PARTS

Ref.	Model	Description
A	23-200	3/4" PVC Ball Valve, NPT Male-Female
B	23-201	3/4" NPT Female Tee Fitting
C	23-202	3/4" x 1/4" Reducing Bushing
D	23-203	Pressure Gauge
E	23-204	3/4" x 3/4" Male to Male Nipple Fitting
F	23-205	Wrench for Water Filter



KROWNE

# Pet

COLLECTION

Tail-Wagging Perfection

Our pet-friendly fixture line enhances convenience for groomers and pet owners. With plenty of configurable options, they're durable and easy to use.



## Pet Grooming Faucets NEW

- ¼ turn ceramic cartridge valves with integral check
- Built-in vacuum breaker
- 9' tangle-resistant coiled hose
- Lightweight anti-fatigue aluminum angled spray handle
- 5.08 GPM @ 125 PSI
- Includes wall-hook
- Temperature range 40°F - 180°F
- Solid chrome plated brass body



**4" Center Wall Mount Pet Grooming Utility Faucet**

- 1/2" NPT male inlets

**Model**  
**21-244L**



**8" Center Wall Mount Pet Grooming Utility Faucet**

- 1/2" NPT female inlets

**Model**  
**21-248L**



**8" Center Raised Deck Mount Pet Grooming Utility Faucet**

- 1/2" NPT female inlets

**Model**  
**21-258L**



### Pet Grooming Hose Kits

- Includes Angled Spray Valve, Coiled Hose Adaptor, Wall Hook, Vacuum Breaker
- Built-in vacuum breaker
- 9' tangle-resistant coiled hose
- Lightweight anti-fatigue aluminum spray handle
- ½" NPT wall-hook
- 5.08 GPM
- Temperature range 40°F - 180°F

Model	Description
<b>21-2XXL</b>	Angled Spray Valve (21-210), Coiled Hose (21-211), Adaptors (21-212, 21-213, 21-214), Wall Hook (21-144), Vacuum Breaker
<b>21-215</b>	Angled Spray Valve (21-210), Coiled Hose (21-211)
<b>21-216</b>	Angled Spray Valve (21-210), Coiled Hose (21-211), Garden Hose Adaptor (21-212)
<b>21-217</b>	Angled Spray Valve (21-210), Coiled Hose (21-211), 3/8" NPT Female Adaptor (21-213)
<b>21-218</b>	Angled Spray Valve (21-210), Coiled Hose (21-211), 1/2" NPT Female Adaptor (21-214)

## Pet Replacement Parts & Accessories



### Angled Spray Valve

- Includes grip and ring
- 5.08 GPM @ 125 PSI

**Model**  
**21-210**



### Coiled Hose

- Tangle-resistant
- For non-potable water applications
- Hose Length 9'

**Model**  
**21-211**



### Pet Grooming Adapters

Model	Description
<b>21-212</b>	3/4" Male x Garden Hose Adapter
<b>21-213</b>	3/4" Male x 3/8" NPT Female Adapter
<b>21-214</b>	3/4" Male x 1/2" NPT Female Adapter

## Wok Faucets

### Heavy Duty 3/8" Male Inlet Wok Range Faucet with 13-3/4" Spout

- 3/8" NPT male inlet
- Automatically turns on when spout is swung over wok

Faucet Model	Case Qty.
<b>16-220L</b>	<b>20</b>



#### Replacement Parts

Model	Description
<b>21-640L</b>	O-ring Repair Kit
<b>21-643L</b>	Replacement Aerator

### 3/8" Wok Range Faucet

- 3/8" NPT male inlet
- Automatically turns on when spout is swung over wok

Faucets Model	Spout Size	Case Qty.
<b>13-222L</b>	12" Swing	<b>20</b>
<b>13-223L</b>	14" Swing	<b>20</b>
<b>13-225L</b>	17" Swing	<b>20</b>



#### Replacement Parts

Model	Description
<b>21-561L</b>	Repair Kit
<b>21-565L</b>	Replacement Aerator

## Wall Mount Extended Wok Range Faucets

- Heavy Duty
- 10" Swing Spout
- 8-1/4" extension from wall
- 1/2" NPT male inlet
- 1/4 turn ceramic cartridge valve

Faucet Model	Spout Size
<b>12-170L</b>	10" Swing
<b>12-171L</b>	12" Swing

#### Replacement Parts

Model	Description
<b>21-600L</b>	Silver Series Valve Repair Kit with Handle
<b>22-611L</b>	Replacement Aerator



### REPLACEMENT PARTS & ACCESSORIES



### O-ring Repair Kit

- Fits Royal Series Wok Faucets

**Model**  
**21-640L**



### Wok Faucet Repair Kit

- Fits Silver Series Wok Faucets
- Includes green T, spring, 2 O-rings, and brass plunger

**Model**  
**21-561L**



### Valve for Extended Wok Range Faucets

- Fits Silver Series Wok Faucets

**Model**  
**21-600L**



21-565L



21-543L

### Wok Faucet Aerators

Model	Fits
<b>21-565L</b>	13-Series Wok Faucets
<b>22-611L</b>	Silver Series 12-170L, 12-171L
<b>21-643L</b>	Royal Series 16-220L

# Utility Sprays

## 8" Center Wall Mount Utility Spray

- 1/2" NPT female inlets on 8" adjustable centers
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included
- Female base
- 1" 20 UNEF threading



**Model**  
**19-108L**

## Single Wall Mount Utility Spray

- 1/2" NPT female inlet
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included
- Female base
- 1" 20 UNEF threading



**Model**  
**19-101L**

## Deck Mount Utility Spray

- 1-1/8" OD x 2-1/2" shank
- Fits in 1-1/4" hole
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included
- Female base
- 1" 20 UNEF threading



**Model**  
**19-201L**

## 4" Center Deck Mount Utility Spray

- 1/2" NPT female inlets on 4" adjustable centers
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included
- Female base
- 1" 20 UNEF threading



**Model**  
**19-204L**

## 8" Center Deck Mount Utility Spray

- 1/2" NPT male inlets on 8" adjustable centers
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included
- Female base
- 1" 20 UNEF threading



**Model**  
**19-208L**

## Single Deck Mount Utility Spray

- 1/2" NPT male inlets
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valve
- Mounting kit included
- Female base
- 1" 20 UNEF threading



**Model**  
**19-203L**

### REPLACEMENT PARTS & ACCESSORIES

#### Angled Pre-Rinse Spray Head

- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available



**Model**  
**21-131L**

#### Replacement Hose with Grip

- Stainless steel flexible hose



Model	Description
<b>21-135L</b>	72" Length
<b>21-136L</b>	96" Length

#### Wall Hook

- Rubber coated hook
- Mounts to wall
- 1/2" wide



**Model**  
**21-144**

## Specialty Utility Spray

### Utility Spray with Add-On Faucet

- 8" center wall mount
- Add-on faucet with 12" spout
- 96" L hose
- Built-in check valves
- Wall mounting kit included
- 1/4 turn ceramic cartridge valves

Model  
19-112L



#### UTILITY SPRAY REPLACEMENT PARTS

### Angled Pre-Rinse Spray Head

Model  
21-131L



### 96" Hose with Grip

Model  
21-136L



## Hose Reels NEW

- Provides water quickly and conveniently to all kitchen areas
- Used for a variety of applications such as filling buckets without lifting them from the floor, rinsing down sinks, worktables and floors during cleanup, as well as filling steam tables
- Equipped with mounting bracket so that it can be mounted on the floor, wall, or ceiling
- Positive latching operation ensures hose will hold at desired length
- Heavy duty specially designed retrieval springs allow for easy hose recoil
- Includes high flow spray valve with high impact resistant bumper
- 3/8" NPT Female Inlet
- Max operating pressure: 250 PSI
- Max Temperature 180°F



Enclosed Stainless Steel Hose Reel with 30' Hose

Model  
24-600



**MOST POPULAR**

Open Stainless Steel Hose Reel with 35' Hose

Model  
24-602



Open Powder Coated Hose Reel with 35' Hose

Model  
24-603

#### HOSE REEL REPLACEMENT PARTS

### Angled Spray Head

- Fits all Krowne hose reels
- Includes 1/4" female thread adapter (assembled)



Model  
21-126



### Replacement Hoses

Model	Description
24-604	35' Hose for 24-602 and 24-603
24-605	30' Hose for 24-600

## Pot Fillers

### 8" Center Wall Mount Pot Filler

- 1/2" NPT female inlets on 8" adjustable centers
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included



**Model**  
**20-108L**

### MOST POPULAR

### Single Wall Mount Pot Filler

- 1/2" NPT female inlet
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included



**Model**  
**20-101L**

### Deck Mount Pot Filler

- 1-1/8" OD x 2-1/2" shank
- Fits in 1-1/4" Hole
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included



**Model**  
**20-201L**

### 4" Center Deck Mount Pot Filler

- 1/2" NPT male inlets on 4" adjustable centers
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included



**Model**  
**20-204L**

### 8" Center Deck Mount Pot Filler

- 1/2" NPT female inlets on 8" adjustable centers
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included



**Model**  
**20-208L**

### Single Deck Mount Pot Filler

- 1/2" NPT male inlet
- 72" long stainless steel flexible hose
- Plastic coated wall hook with chrome plated base
- Vacuum breaker
- Built-in check valves
- Mounting kit included



**Model**  
**20-203L**

### REPLACEMENT PARTS & ACCESSORIES

#### Pot Filler Spray Head

- Interchangeable with most brands
- Reinforced spray head
- Full repair kits available



**Model**  
**21-132L**

#### 72" Hose with Grip

- 72"L stainless steel flexible hose



**Model**  
**21-135L**

#### Wall Hook

- Rubber coated hook
- Mounts to wall



**Model**  
**21-144**

# Test Strips

## Chlorine Test Strips

- Sanitizer test strips for bleach-based solutions
- 100 strips per bottle
- Color-coded chart
- Test range: 0-200 ppm



Model	Description
<b>S25-123</b>	1-Pack Loose
<b>P25-123</b>	2-Pack in Header

## QAC Test Strips

- Sanitizer test strips for QAC-based solutions
- 100 strips per bottle
- Color-coded chart
- Test range: 0-500 ppm



Model	Description
<b>S25-124</b>	1-Pack Loose
<b>P25-124</b>	1-Pack in Header

## pH Test Strips

- Test acidity (pH) level in sushi rice, salsa and salad dressing
- 50 strips per bottle
- Color-coded chart
- Test range: 3.0-6.0 pH units



Model	Description
<b>S25-126</b>	1-Pack Loose
<b>P25-126</b>	1-Pack in Header

## High Range QAC Test Strips

- Used to test solutions that kill pathogenic organisms
- 50 strips per bottle
- Color-coded chart
- Test range: 0-1500 ppm



Model	Description
<b>S25-127</b>	1-Pack Loose
<b>P25-127</b>	1-Pack in Header

# Wobble Wedges®



## 75-Pack Hard Wobble Wedges®

- Fix anything that wobbles
- Can be stacked
- Great for carpet
- Hard clear plastic wedges

<b>Model</b>	<b>29-160</b>
--------------	---------------



## 30-Pack Soft Wobble Wedges®

- Fix anything that wobbles
- Can be stacked
- Can be trimmed
- Great for hard surfaces
- Soft black plastic wedges

<b>Model</b>	<b>29-158</b>
--------------	---------------


# Cooking Accessories



## Chrome Oven Knobs

- Easy installation
- Built for durability

Model	Description
<b>25-200S</b>	1 Piece
<b>25-200</b>	Pack of 6



## Black Oven Knobs

- Easy installation
- Built for durability

Model	Description
<b>25-201S</b>	1 Piece

## Petrol-Gel Food Grade Grease

- Tasteless, odorless
- Non-toxic
- Rated from 15°F to 210°F
- 4 oz. tube

Model	Description
<b>S25-140</b>	4 oz. Loose Tube
<b>P25-140</b>	1 Pack in Header



# Foodservice Accessories



## Exhaust Hood Vaporproof Light Fixture

- Meets code 96 & NEC 410
- Designed for commercial cooking hood
- Base 5-1/2"D, 3-1/2"H
- Height with globe 9-1/2"H
- Maximum 100W bulb

Model	Description
<b>25-103</b>	Shatterproof Plastic Coated Glass Globe with Slanted Base (Replaces FMP® #253-1184)
<b>25-112</b>	Shatterproof Plastic Coated Globe with Wire Guard & Slanted Base (Replaces FMP® #253-1185)
<b>25-128</b>	Slanted Base for Exhaust Hood Vaporproof Light Fixture



## Refrigeration Light Fixture

- Die cast aluminum base
- Surface mount
- Maximum 100W bulb

Model	Description
<b>25-113</b>	Shatterproof Plastic Coated Glass Globe with Wire Guard & Straight Base (Replaces FMP® #253-1230)
<b>25-118</b>	Shatterproof Plastic Coated Glass Globe with Straight Base (Replaces FMP® #253-1229)
<b>25-120</b>	Tempered Glass Globe with Wire Guard & Straight Base (Replaces FMP® #253-1231)
<b>25-125</b>	Tempered Glass Globe with Straight Base (Replaces FMP® #253-1228)
<b>25-129</b>	Straight Base for Refrigeration Light Fixture



## Replacement Globe

- Maximum 100W bulb
- Rated to 392° F (200°C) for glass globes
- 9 pieces per case

Model	Description
<b>25-100</b>	Shatterproof Plastic Coated Globe 3-1/4"D x 6-3/4"H
<b>25-101</b>	Plastic Globe 3-1/4"D x 6-3/4"H
<b>25-102</b>	Tempered Glass Globe 3-1/4"D x 6-3/4"H



## Wire Guard for Light Fixtures

- Fits standard 3-1/4" diameter x 6-3/4" high globe
- Zinc plated
- Maximum 100W bulb
- Rated to 392°F (200°C)
- Replaces FMP® #253-1232

**Model**  
**25-104**



**30-317**



**30-318**



**P30-318**

## Stainless Steel Snap-In Shelf Support

- Tab on top
- 7/8" wide

Model	Description
<b>30-317</b>	Zinc Plated, 1 piece (Replaces FMP® #135-1240)
<b>30-318</b>	Stainless Steel, 1 piece (Replaces FMP® #135-1241)
<b>P30-318</b>	Stainless Steel (pack of 12 pieces)



## Coffee Urn Faucets

- Premium brass faucet body and bonnet with chrome finish
- Includes spring, stem and seat cup
- Three color-coded handle options available

Model	Description
<b>19-301</b>	Black for Coffee
<b>19-302</b>	Orange for Decaff
<b>19-303</b>	Red for Hot Water

# Foodservice Accessories

## 3-Compartment Bottle Wells for Ice Bins

- Overall Flange size 16"L x 6-3/4"W
- Fits in any ice bin that is at least 14-1/4" front to back
- Built-in rail for sliding cover
- Raised floor to keep bottles dry



Model	Description
<b>30-550</b>	1 Bottle Well
<b>30-502</b>	2-Pack

## Super-Level® Self-Leveling Glide

- Automatically adjusts tables
- 1-1/8" base diameters
- 1/4" - 20 thread
- 25 to 140 lbs. load capacity per set of 4



Model	Description
<b>29-162</b>	(1) Glide
<b>29-162P</b>	Set of 4 Glides

## Bullet Foot

- Plastic bullet foot for 1-5/8" diameter legs
- Fits all Krowne Ice Bins and Underbar Equipment
- Fits most kitchen sinks and worktables



Model	Description
<b>29-108</b>	Plastic Bullet Foot
<b>29-101</b>	Stainless Steel Bullet Foot

## Food Grade Grease



- Great for use on food contact equipment such as choppers, slicers, toasters, and conveyor chains
- Protects against oxidation and wear
- 10 oz.

Model	Case Qty.
<b>30-200</b>	<b>6</b>

## Food Grade Oil



- Great for use on mixers, conveyors, rollers, slides, paste, and sauce fillers
- Odorless, tasteless, non-toxic, safe on plastic
- 12 oz.

Model	Case Qty.
<b>30-201</b>	<b>6</b>

## Food Grade Silicone



- Great for use on refrigerator doors, drawer slides, and food racks
- High viscosity, safe on plastic, ultra pure, no chlorine
- 9.25 oz.

Model	Case Qty.
<b>30-202</b>	<b>6</b>

# Fryer Accessories



**30-325**  
Shown on fryer

## Stainless Steel Fryer Splash Guards

- Fits most fryers
- Stainless steel - 20-1/2" x 18"
- Used for preventing the travel of hot oil

Model	Description
<b>30-324</b>	Guard for 1/2" thick fryer walls
<b>30-325</b>	Guard for 1" thick fryer walls



## Fryer Cleaning Brush

- For temperatures up to 750°F
- Durable brass bristles
- Angled head for easy cleaning
- No need for oil to cool completely when cleaning

Model
<b>30-330</b>



## Fryer Clean Out Rod

- For cleaning clogged fryer drains
- 25" Long
- Stainless steel
- Can be used on any fryer type

Model
<b>30-335</b>

# Ice & Water Service Station Accessories



**WS-2**

## Drop-In Water/Ice Station

- 27" x 20" x 12" overall
- Push-back glass filler included (8" high from deck to spout tip)
- 15-1/2" x 10-1/2" x 10" deep bin with 1-1/4" drain (23-120)
- 1/2" IPS male water inlet
- Heavy duty stainless steel wire grid

Model	Description
<b>WS-2</b>	Drop-In Water/Ice Station with 8" Glass Filler




**WS-1**

## Drop-In Water Station

- 12-1/2" x 12-1/2" overall
- Adjustable flow with continuous on position
- Push-back glass filler included (8" high from deck to spout tip)
- 1/2" IPS male water inlet
- 1/2" NPS nickel plated brass drain
- Heavy duty stainless steel wire grid

Model	Description
<b>WS-1</b>	Drop-In Water Station with 8" Glass Filler



## Deck Mount Electronic Sensor Pitcher Filler

- Infrared sensor operated
- Easy adjust shut-off delay, auto flush, auto time-out, and range sensitivity
- Low battery LED indicator light
- 12"H from deck to spout tip
- 2.2 GPM installed, 0.5 GPM included
- Fits in 7/8" single hole
- 1/4" NPS male inlet
- Includes: pitcher filler, control module and supply line
- 4 AA batteries, not installed

Model
<b>16-648</b>

## Deck Mount Pitcher Fillers & Glass Fillers



**16-135L**

- Adjustable flow with continuous on position
- Push-back water activation
- Designated height is from deck to spout tip
- 1/2" NPS male inlet
- Fits in 7/8" hole

Model	Height From Deck to Spout Tip
<b>16-135L</b>	8"H Glass Filler
<b>16-137L</b>	10"H Pitcher Filler
<b>16-138L</b>	12"H Pitcher Filler
<b>16-139L</b>	14"H Pitcher Filler

**16-136L** - Repair Kit for Glass/Pitcher Fillers



Replacement Valve with Handle available (21-332L)

## Steam Table Faucet

- Fits in 3/4" hole deck mount
- 4-1/4" spout
- 1/2" NPS male inlet
- Ceramic cartridge valve

Model
<b>16-152L</b>



## In-line Pressure Regulator

- Fits all glass rinsers
- Lowers water pressure to prevent damage to valve
- Set at 15 - 20 PSI
- Supplied with 2 barbs that will accommodate 3/8" or 1/2" I.D. hoses

Model
<b>16-165</b>

# Drop-In Ice Bins

## Large Drop-In Ice Bin with Sliding Cover

- Sliding cover opens front-to-back
- 27"W x 20"D x 12"H overall (15" overall depth with cold plate)
- Cutout: 25-1/4" x 18-1/4"
- 13-1/2" from left side to center drain
- Sliding cover included (SC2712)
- Fully insulated
- 10" deep liner

Model	Description
<b>D2712</b>	Large Drop-In Ice Bin
<b>D2712-7</b>	Large Drop-In Ice Bin with 7-Circuit Cold Plate
<b>D2712-10</b>	Large Drop-In Ice Bin with 10-Circuit Cold Plate
<b>D2712DP</b>	Large Drop-In Ice Bin Deep Style (15" deep liner)



D2712



**NEW**

Alternate Sliding Cover available

## Medium Drop-In Ice Bin with Sliding Cover

- 20"W x 15"D x 12"H overall
- Cutout: 18-1/4" x 13-1/4"
- 10" from left side to center drain
- Sliding cover included (SC278)
- Fully insulated
- 10" deep liner

Model	Description
<b>D278</b>	Medium Drop-In Ice Bin
<b>D278-7</b>	Medium Drop-In Ice Bin w/ 7-Circuit Cold Plate



D278

# Dipperwells



16-153L

## Front Mount Dipper Well

- 304 stainless steel
- Includes 16-151L dipper well faucet with shut-off valve
- Single welded, removable divider/overflow that splits bowl
- Mounting bracket for faucet
- G1 drain thread

Model	Description
<b>16-153L</b>	Replacement Overflow Drain Tube available ( <b>16-153L-DT</b> )

## Dipper Well Faucets

- 1/2" NPSM male inlet
- Chrome plated brass faucet
- Fits in 7/8" hole

Model	Description	GPM
<b>16-550L</b>	Premium 1/4 Turn Ceramic Handle with Flow Restrictor	0.4
<b>21-307L</b>	Replacement valve	NA
<b>16-151L</b>	Compression Style with Flow Restrictor	1.33
<b>16-158</b>	Old Style Replacement Valve	NA



16-550

21-307L

16-151L

16-158

**NEW**

**NEW**

**NEW**

## Drop-In Dipper Well & Faucet

- Dipper well fits 6-1/2" hole
- Faucet fits in 7/8" hole
- 1-1/2" drain
- Stainless steel inner and outer can
- Chrome plated brass 1.33 GPM faucet
- 1/2" NPS Male inlet

Model	Description
<b>16-149</b>	Dipper Well & Faucet
<b>16-150</b>	Dipper Well Only



Replacement Valve available (**16-158**)

## Jet Rinser **NEW**

- Stainless steel perforated grid
- 4-1/4" disc diameter
- Integrated pressure regulator (21 PSI)
- Removable snap in/out rinser plate for cleaning
- 360° swivel rinser plate
- Simple installation with basic plumbing connection

Model	Description
<b>16-440</b>	Jet Rinser



### Replacement Parts

Model	Description
<b>16-441</b>	Rinser Plate + Rubber Sleeve
<b>16-442</b>	Cartridge Valve
<b>16-443</b>	Mounting Kit

## Triple Spray Pitcher Rinser **NEW**

- Stainless steel rinser plate
- 6" disc diameter
- Removable rinser plate for cleaning
- Simple installation with basic plumbing connection

Model	Description
<b>16-446</b>	Triple Spray Pitcher Rinser



### Replacement Parts

Model	Description
<b>16-159</b>	Replacement Cartridge
<b>16-144-B</b>	Bushing Slider



# Hand Sinks

Designed for unique applications. Most models come with a quarter turn ceramic faucet, drain and wall bracket. Sizes include widths of 16", 12" and 9". Optional side splashes, soap and towel dispensers, electronic faucets, and manual faucets are available. Ready to satisfy local health codes.

# Standard Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



## Standard Hand Sink

- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-2L</b>	17-1/4"W x 15-1/4"D x 13"H	13



## Standard Hand Sink with Side Support Brackets

- Side support brackets on each side
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-10</b>	15-3/4"W x 15-1/4"D x 19-1/4"H	16



## Standard Hand Sink with Royal Series Faucet

- Royal Series faucet with 1/4 turn ceramic cartridge valves (14-400L)
- 5" deep drawn bowl
- 1-1/2" drain
- 21-308L (cold) and 21-309L (hot) replacement valves

Model	Overall Size	Wgt.
<b>HS-22</b>	17-1/4"W x 15-1/4"D x 13"H	16



## Standard Hand Sink with Wrist Blades Handles

- 5" deep drawn bowl
- Faucet w/ 1/4 turn ceramic valves, 0.5 GPM (10-435L-W)
- Wrist blade handles
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-43</b>	17-1/4"W x 15-1/4"D x 13"H	14



## Standard Hand Sink with Deck Mount Faucet

- 5-3/4" deep drawn bowl
- 11-435L deck mount faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-18</b>	14-1/16"W x 16-1/2"D x 13-1/2"H	13




## Standard Hand Sink with Overflow Drain & P-Trap

- Overflow & p-trap
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size
<b>HS-4</b>	17-1/4"W x 15-1/4"D x 13"H

### Replacement Parts & Accessories



4" Center Faucet with 4-1/2" Double Bend Spout

**10-435L**



1/4 Turn Ceramic Valves

**21-300L**



1-1/2" Drain (Locknut and Washer Included)

**23-121**



E-Z Install Flexible Water Line Kit

**21-443L**



Chrome Plated P-Trap

**H-100**



Wrist Blade Handles

**21-312**

# Standard Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



## Standard Hand Sink with Side Splashes

- 7-3/4"H side splashes on both sides
- 6" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" Drain

Model	Overall Size	Wgt.
<b>HS-26L</b>	16"W x 15"D x 14"H	15
<b>HS-26-LF</b>	16"W x 15"D x 14"H	15



## Standard Hand Sink with Side Splashes & P-Trap

- 7-3/4"H side splashes on both sides
- P-trap included
- 6" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain
- Weight: 15 lbs.

Model	Overall Size
<b>HS-5</b>	15-3/4"W x 15-1/4"D x 13"H



## Standard Hand Sink with One Side Splash

- 7-3/4"H side splash on one side
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-2-LS</b>	16"W x 15"D x 14"H	14
<b>HS-2-RS</b>	16"W x 15"D x 14"H	14

HS-2-LS shown



## Standard Hand Sink with Hands Free Faucet Wand

- Faucet with push back activation
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain



Model	Overall Size	Wgt.
<b>HS-34</b>	17-1/4"W x 15-1/4"D x 13"H	14

### Replacement Parts & Accessories



4" Center Faucet with 4-1/2" Double Bend Spout

**10-435L**



1/4 Turn Ceramic Valves

**21-300L**



1-1/2" Drain (Locknut and Washer Included)

**23-121**



E-Z Install Flexible Water Line Kit

**21-443L**



Spout-mount Eyewash

**16-232L**



## Standard Hand Sink Eyewash Station

- Eye wash included (16-232L)
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-36</b>	17-1/4"W x 15-1/4"D x 13"H	15

# Standard Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



## Standard Hand Sink with 4" Center Electronic Faucet

- Electronic sensor faucet, 2.2 GPM (16-670)
- 15-3/4"W x 15-1/4"D x 13-3/8"H overall
- 6" deep drawn bowl
- 1-1/2" drain

Model	Description	Wgt.
<b>HS-67</b>	No Side Splashes	18
<b>HS-68</b>	With Side Splashes	21



## Standard Hand Sink with Single Hole Electronic Faucet

- Electronic sensor faucet, 2.2 GPM (16-675)
- 15-3/4"W x 15-1/4"D x 13-3/8"H
- 6" deep drawn bowl
- 1-1/2" drain

Model	Description	Wgt.
<b>HS-69</b>	No Side Splashes	16
<b>HS-70</b>	With Side Splashes	19



## Standard Hand Sink with Single Hole Electronic Faucet

- 16-190 electronic sensor faucet (2.2 GPM)
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-11</b>	15-3/4"Wx15-1/4"Dx13-3/8"H	14
<b>HS-12</b>	15-3/4"Wx15-1/4"Dx13-3/8"H	14



## Standard Hand Sink with Overflow Drain & P-Trap

- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- Overflow & p-trap
- 5" deep drawn bowl
- 1-1/2" drain
- Weight 15 lbs.

Model	Overall Size
<b>HS-4</b>	17-3/4"W x 15-1/4"D x 13"H



## Standard Hand Sink with Single Hole Electronic Faucet, Overflow & P-Trap, and Soap & Towel Dispenser

- Electronic sensor faucet, 2.2 GPM (16-190)
- Overflow & p-trap
- Soap & towel dispenser
- 6" deep drawn bowl
- 1-1/2" drain
- Weight 30 lbs.

Model	Overall Size
<b>HS-13</b>	16-3/16"Wx15-1/4"Dx27-5/8"H

### Replacement Parts & Accessories



Chrome Plated P-Trap  
**H-100**



3-1/2" Drain with Strainer  
**23-123**



1-1/2" Drain (Locknut and Washer Included)  
**23-121**



AC Adapter  
**16-199**

# Standard Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



## Standard Hand Sink with Overflow & P-Trap and Soap & Towel Dispenser

- Overflow & p-trap
- Soap & towel dispenser
- 16-3/16"Wx15-1/4x27-5/8"H overall hand sink size
- 6" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Description	Wgt.
<b>HS-7</b>	No Side Splashes	35
<b>HS-33</b>	With Side Splashes	38



## Standard Hand Sink with Overflow & P-Trap, Soap & Towel Dispenser, and Side Supports

- Side supports on each side
- Overflow & p-trap
- Soap & towel dispenser
- 6" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain
- Weight 35 lbs.

Model	Overall Hand Sink Size
<b>HS-58</b>	16-3/16"Wx15-1/4"Dx27-5/8"H



## Standard Hand Sink with Overflow & P-Trap, Soap & Towel Dispenser, and Stainless Steel Skirt

- Stainless steel skirt
- Overflow & p-trap
- Soap & towel dispenser
- 6" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain
- Weight 35 lbs.

Model	Overall Hand Sink Size
<b>HS-8</b>	16-3/16"Wx15-1/4"Dx29-1/2"H



## Standard Hand Sink with Soap & Towel Dispenser

- Soap & towel dispenser
- 6" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain
- Weight 35 lbs.

Model	Overall Hand Sink Size
<b>HS-56</b>	16-3/16"Wx15-1/4"Dx27-5/8"H

### Replacement Parts & Accessories



4" Center Faucet with 4-1/2" Double Bend Spout  
**10-435L**



1/4 Turn Ceramic Valves  
**21-300L**



1-1/2" Drain (Locknut and Washer Included)  
**23-121**



Chrome Plated P-Trap  
**H-100**



E-Z Install Flexible Water Line Kit  
**21-443L**

# Standard Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



HS-14

## Standard Hand Sink with Foot Pedal Valve

- 15-3/4"Wx15-1/4"Dx41-1/4"H overall size, 6" deep drawn bowl
- Foot pedal faucet with built-in flow control on hot and cold valves
- Deck mount soap dispenser (only included on model HS-14)
- Single hole remote faucet, 1.8 GPM (16-140L)
- 1-1/2" drain

Model	Description	Wgt.
HS-14	No Side Splashes	35
HS-40	Includes Side Splashes	38



HS-39

## Standard Hand Sink with Foot Pedal Valve and Soap & Towel Dispenser

- 16-3/16"Wx15-1/4"Dx55-1/2"H overall size
- 6" deep drawn bowl
- Foot pedal faucet with built-in flow control on hot and cold valves
- HS-39 has deck mount soap dispenser
- HS-42 has wall mount soap dispenser
- Single hole remote faucet, 1.8 GPM (16-140L)
- 1-1/2" drain
- Non-locking

Model	Description	Wgt.
HS-39	No Side Splashes	50
HS-42	Includes Side Splashes	53



## Standard Hand Sink with Knee Pedal Valve

- 15-3/4"Wx15-1/4"Dx19-1/4"H overall size
- 6" deep drawn bowl
- Knee pedal faucet with built-in flow control on hot and cold valves
- Single hole remote faucet, 1.8 GPM (16-140L)
- 1-1/2" drain

Model	Description	Wgt.
HS-15	No Side Splashes	26
HS-41	Includes Side Splashes	29



## Standard Hand Sink with Knee Pedal Valve and Soap & Towel Dispenser

- 6" deep drawn bowl
- Knee pedal faucet with built-in flow control on hot and cold valves
- Soap & towel dispenser
- Single hole remote faucet, 1.8 GPM (16-140L)
- 1-1/2" drain

Model	Overall Hand Sink Size	Wgt.
HS-16	16-3/16"Wx15-1/4"Dx33-1/2"H	36

### Replacement Parts & Accessories



Single Hole Wall Mount Spout

16-140L



1-1/2" Drain (Locknut and Washer Included)

23-121



Foot Pedal Valve

16-407L



Knee Pedal Valve

16-406L



Flexible waterline installation kit for foot pedal valves

21-447L

# Standard Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



## Standard Hand Sink with 4" Center Faucet Holes, Less Faucet

- 4" center faucet holes, faucet not included
- 5" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-2-LF</b>	17-1/4"W x 15-1/4"D x 13"H	11



## Standard Hand Sink with Single Faucet Hole, Less Faucet

- Single faucet hole, faucet not included
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-11-LF</b>	15-3/4"W x 15-1/4"D x 13-3/8"H	11



## Standard Hand Sink with 8" Center Faucet Holes, Less Faucet

- 8" center faucet holes, faucet not included
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-20-LF</b>	15-3/4"W x 15-1/4"D x 13"H	11



## Standard Hand Sink with 4" Center Deck Faucet Holes, Less Faucet

- 4" center deck faucet holes, faucet not included
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-18-LF</b>	14-1/16"W x 16-5/8"D x 13-5/8"H	11



## Standard Hand Sink with 4" Center Faucet Holes & Side Splashes, Less Faucet

- 4" center faucet holes, faucet not included
- 7-3/4"H side splashes
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-26-LF</b>	17-1/4"W x 15"D x 14"H	11

### Popular Faucet Upgrades



4" Center Wall Mount Electronic Sensor Faucet  
**16-670**



Single Hole Wall Mount Electronic Sensor Faucet  
**16-675**



4" Center Wall Mount with 4-1/2"W Double Bend Spout  
**DX-400**



4" Center Deck Mount with 4-1/2"W Double Bend Spout  
**DX-325**



8" Center Wall Mount with 6"W Double Bend Spout  
**DX-801**

### Replacement Parts & Accessories



Chrome P-Trap  
**H-100**



4" Center Faucet with 4-1/2"W Double Bend Spout  
**10-435L**



1/4 Turn Ceramic Valves  
**21-300L**



1-1/2" Drain (Locknut and Washer Included)  
**23-121**



E-Z Install Flexible Water Line Kit  
**21-443L**

# 12"W Space Saver Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



HS-31

## Space Saver Hand Sink with Soap & Towel Dispenser, Overflow & P-Trap

- HS-31 size: 12"W x 14-1/4"D x 28"H
- HS-32 size: 12"W x 14-1/4"D x 28"H
- HS-37 size: 12"W x 14-1/4"D x 30-1/2"H
- Overflow & p-trap
- Soap & towel dispenser
- 9"W x 9"L x 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Includes
<b>HS-31</b>	Soap & Towel, Overflow, P-Trap
<b>HS-32</b>	Soap & Towel, Overflow, P-Trap, Side Splashes
<b>HS-37</b>	Soap & Towel, Overflow, P-Trap, Stainless Steel Skirt



## Space Saver Hand Sink

- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-9L</b>	12"W x 14-1/4"D x 13"H	12



## Space Saver Hand Sink with Royal Series Faucet

- Royal Series faucet with 1/4 turn ceramic cartridge valves, 0.5 GPM (14-4XXL base & 21-430L spout)
- 5" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-21</b>	12"W x 14-1/4"D x 13"H	15



## Space Saver Hand Sink with Side Splashes

- 7-3/4"H side splashes on both sides
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-30L</b>	12"W x 14-1/4"D x 13"H	15



HS-9-LS

## Space Saver Hand Sink with One Side Splash

- 7-3/4"H side splash on one side
- 12"W x 14-1/4"D x 13H,"L, 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Description	Wgt.
<b>HS-9-LS</b>	Side Splash on Left Side	14
<b>HS-9-RS</b>	Side Splash on Right Side	14

### Replacement Parts & Accessories



4" Center Faucet with 4-1/2" Double Bend Spout  
**10-435L**



1/4 Turn Ceramic Valves  
**21-300L**



1-1/2" Drain (Locknut and Washer Included)  
**23-121**



Chrome Plated P-Trap  
**H-100**



E-Z Install Flexible Water Line Kit  
**21-443L**

# 12"W Space Saver Hand Sinks

All Krowne Hand Sinks include Faucet, Drain & Wall Bracket (unless specified)



## Space Saver Hand Sink with 4" Center Electronic Faucet

- Electronic sensor faucet, 1.0 GPM (16-670)
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-64</b>	12-1/2"W x 17-1/4"D x 13-3/8"H	17



## Space Saver Hand Sink with 4" Center Electronic Faucet & Side Splashes

- Electronic sensor faucet, 1.0 GPM (16-670)
- 7-3/4"H side splashes on both sides
- 5" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-65</b>	12-1/2"W x 17-1/4"D x 13-3/8"H	17



## Space Saver Hand Sink with 4" Center Holes, Less Faucet

- 4" center faucet holes, faucet not included
- 5" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-9-LF</b>	12"W x 14-1/4"D x 13"	11



## Space Saver Hand Sink with 4" Center Holes & Side Splashes, Less Faucet

- 4" center faucet holes, faucet not included
- 7-3/4"H side splashes
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-30-LF</b>	12"W x 14-1/4"D x 13"H	13



## Space Saver Hand Sink with Single Hole, Less Faucet

- Single faucet hole, faucet not included
- 6" deep drawn bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-9S-LF</b>	12"W x 17"D x 14"H	11



## Space Saver Hand Sink with Eyewash Station

- Spout-mount eyewash (16-232L)
- 5" deep drawn bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-35</b>	12"W x 14-1/4"D x 13"H	15

### Replacement Parts & Accessories



4" Center Electronic Sensor Faucet  
**16-670**



Single Hole Wall Mount Electronic Sensor Faucet  
**16-675**



4" Center Faucet with 4-1/2"W Double Bend Spout  
**DX-400**



4" Center Faucet with 4-1/2" Double Bend Spout  
**10-435L**



1/4 Turn Ceramic Valves  
**21-300L**



1-1/2" Drain (Locknut and Washer Included)  
**23-121**



E-Z Install Flexible Water Line Kit  
**21-443L**

## 9" Wide MiniMax Hand Sinks

All ADA Compliant Hand Sinks include a faucet, wall bracket & two side supports.



### 9"W MiniMax Hand Sink

- 6" fabricated bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-1</b>	9"W x 12"D x 14"H	14



### 9"W MiniMax Hand Sink with Side Splashes

- 6" fabricated bowl
- Faucet with 1/4 turn ceramic valves, 0.5 GPM (10-435L)
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-19</b>	9"W x 12"D x 14"H	17



### 9"W MiniMax Hand Sink with Electronic Sensor Faucet

- Electronic sensor faucet, 2.2 GPM (16-670)
- 6" fabricated bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-61</b>	9"W x 12"D x 14"H	17



### 9"W MiniMax Hand Sink with Electronic Faucet & Side Splashes

- Electronic sensor faucet, 2.2 GPM (16-670)
- 7-3/4" H side splashes on both sides
- 6" fabricated bowl
- 1-1/2" drain

Model	Overall Size	Wgt.
<b>HS-62</b>	9"W x 12"D x 14"H	17

## ADA Compliant Hand Sinks

All ADA Compliant Hand Sinks include a faucet, wall bracket & two side supports.



### 4" Center Deck Mount With Wrist Blades

- 4" center deck mount faucet with 6" double bend spout, 1.8 GPM
- Deck mount soap dispenser
- 1-1/2" drain
- Weight 24 lbs.

Model	Overall Size	Bowl
<b>HS-50</b>	20"W x 24"D x 16"H	5" Deep



### Single Hole Hands Free Electronic Faucet

- Electronic faucet with 6" gooseneck spout, 1.5 GPM (16-650)
- Deck mount soap dispenser
- 1-1/2" drain
- Weight 24 lbs.

Model	Overall Size	Bowl
<b>HS-51</b>	20"W x 24"D x 16"H	5" Deep



### 8" Center Deck Mount With Wrist Blades

- 8" center deck mount faucet with 6" double bend spout, 1.8 GPM
- 1-1/2" drain
- Weight 26 lbs.

Model	Overall Size	Bowl
<b>HS-53</b>	20"W x 24"D x 16"H	5" Deep

# Hand Sink Parts & Accessories

## Mini Tank Water Heater, 2.5 Gallons

- Point-of-use heating eliminates long hot water pipe runs
- Used for hand washing
- Compact design fits virtually anywhere
- Easy and ready to install
- Hot or cold water feed
- Adjustable temperature control 50°-140°F
- T&P relief valve included
- Enameled glass lined tank for extended life
- Floor or wall mountable
- Wall bracket included
- Field replaceable element
- ETL tested to UL 174 and NSF 372
- Plugs into standard outlet, cord included
- Single weld design
- Tank status indicator light  
Green: ready mode, Red: heating mode



**NEW**

**Model HS-MTH25**



**H-121**

### Automatic Wall Mount Soap Dispensers

- Touch-free sensor
- Mounting screws included
- Safety lock with key
- Refillable soap container with site window
- Uses (4) C batteries (not included)

Model	Description
<b>H-121</b>	For Liquid Soap or Sanitizer
<b>H-122</b>	For Foam Soap



### Manual Wall Mount Soap/Sanitizer Dispenser

- Manual pump action
- For liquid soap or sanitizer
- Mounting screws included
- Safety lock with key
- Refillable soap container with site window

**Model H-145**



**H-162**

**H-165**

**H-160**

### Soap Dispenser Mounting

- For automatic wall mount dispensers (H-121 and H-122)

Model	Description	Details
<b>H-162</b>	Soap Dispenser Countertop Stand	Can be used with Soap Dispenser Tray
<b>H-165</b>	Soap Dispenser Floor Stand	Can be used with Soap Dispenser Tray
<b>H-160</b>	Soap Dispenser Drip Tray	Adhesive backing



### Soap & Towel Dispenser

- 7-1/2" x 11-3/4" tri-fold paper towels
- Mounts on wall above hand sink for easy access

Model	Description
<b>H-111</b>	16"W Soap & Towel Dispenser
<b>H-115</b>	12"W Soap & Towel Dispenser



**H-116**



**H-101**

### Soap Dispensers

Model	Description
<b>H-116</b>	Wall Mount Soap Dispenser, 30 oz.
<b>H-101</b>	Deck Mount Soap Dispenser, 13 oz. (Fits 1-1/8" opening)



### Towel Dispenser

- Wall mount
- 11"W x 15"H x 4"D
- Uses 7-1/2" x 11-3/4" tri-fold paper towels paper towels

**Model H-105**

# Hand Sink Parts & Accessories



## Single Pedal Valves

- Built-in flow control on hot and cold valves
- Self closing valve
- Repair kit available
- Built-in check valves
- Adjust temperature by using flow control valves
- Mounting screws not included
- Repair kit for (1) hot or cold valve available (Model 21-302L)

Model	Description
<b>16-407L</b>	Single Pedal Foot Valve
<b>16-406L</b>	Single Pedal Knee Valve



## Double Pedal Valves

- Self closing valve
- Repair kit available
- Color-coded knee pedals
- 4-1/2" hole centers
- Mounting screws not included
- Repair kit for (1) hot or cold valve available (Model 21-302L)

Model	Description
<b>16-120L</b>	Double Pedal Foot Valve
<b>16-121L</b>	Double Pedal Knee Valve

## Field Installed Side Splashes

- Fits all Krowne hand sinks
- Easy to install in the field
- Does not require screws
- Pre-applied industrial strength double-sided tape
- Silicone sealant included



Model	Splash Location
<b>SG-L2</b>	Left Side
<b>SG-R2</b>	Right Side
<b>SG-LR2</b>	Left & Right Side

## Factory Installed Side Splashes

- Fits all Krowne hand sinks
- Spot welded to side of hand sink
- Sealed with silicone to meet local health code requirements



Model	Splash Location
<b>FG-L2</b>	Left Side
<b>FG-R2</b>	Right Side
<b>FG-LR2</b>	Left & Right Side

## Stainless Steel Skirts



- Factory installed
- Sink not included

Model	Fits Hand Sink Size
<b>H-108-2</b>	17-1/4"W
<b>H-108-9</b>	12"W
<b>H-108-1</b>	9"W



## Spout-Mount Eyewash

- Fits all spouts
- Hand sink & faucet not included

<b>Model</b>	<b>16-232L</b>
--------------	----------------



## Side Support Brackets

- For added strength

<b>Model</b>	<b>H-110</b>
--------------	--------------



## Wall Bracket

Model	Fits Hand Sinks
<b>WB-1712</b>	9"W MiniMax



## Hands-Free Spout Valve

- Spring loaded for automatic closure
- Dual position for continuous flow
- Simple screw-on installation

<b>Model</b>	<b>21-451</b>
--------------	---------------



## Replacement Wall Mount Faucet

- 4" center wall mount
- 1/4 turn ceramic valves
- 4-1/2" Double Bend Spout

<b>Model</b>	<b>10-435L</b>
--------------	----------------



## Handle Repair Kits



Model	Description
<b>21-300L</b>	Faucet Repair Kit
<b>21-311</b>	Wrist Handle Kit



## Chrome Plated P-Trap

- 1-1/2" IPS

<b>Model</b>	<b>H-100</b>
--------------	--------------

## Overflow Assembly

- Includes hose, clamps & overflow inlet

<b>Model</b>	<b>23-157</b>
--------------	---------------



## 1-1/2" Drain

- Fits 1-1/2" sink opening
- 1-1/2" NPS male

<b>Model</b>	<b>23-121</b>	Locknut & washer included
--------------	---------------	---------------------------



## E-Z Install Hoses

Model	Description
<b>21-443L</b>	E-Z Install Flexible Water Line Kit
<b>21-447L</b>	Water Install Lines For Foot Pedal Valve
<b>21-198L</b>	1/2" x 3/8" Braided Supply Hoses



Deck mount  
**21-198L**

# One Compartment Drop-In Sinks

All Krowne Drop-In Hand Sinks include Faucet & Drain (unless specified)



## 15" x 15" Overall Drop-In Sink

- 15" x 15" overall
- 12"W x 10"D x 5-3/16" deep bowl
- Cutout: 14-3/8" x 14-3/8"
- 11-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" drain
- Cannot add side splashes

Model	Weight
<b>HS-1515</b>	8 lbs.



## 13" x 17-1/2" Overall Drop-In Sink

- 13" x 17-1/2" overall
- 11"W x 13-1/2"D x 6-3/8" deep bowl
- Cutout: 11-1/2" x 16"
- 11-435L faucet with 1/4 turn ceramic valves (0.5 GPM)
- 1-1/2" drain

Model	Weight
<b>HS-1317</b>	8 lbs.



## 20-1/4" x 17" Overall Drop-In Sink

- 20-1/4" x 17" overall
- 17-3/4"W x 12-3/4"D x 7-1/2" deep bowl
- Cutout: 18-1/4" x 15-1/2"
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 1-1/2" drain

Model	Weight
<b>HS-2017</b>	8 lbs.



HS-1419

## 12" x 18" Overall Drop-In Sinks

- HS-1419 bowl: 10"W x 14"D x 10" deep
- HS-1425 bowl: 10"W x 14"D x 5" deep
- Cutout: 10-1/2" x 16-3/4"
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 3-1/2" Drain

Model	Description
<b>HS-1419</b>	10" Deep Bowl
<b>HS-1425</b>	5" Deep Bowl



HS-1220

## 12" x 18" Overall Drop-In Sinks with Side Splashes

- HS-1220 bowl: 10"W x 14"D x 10" deep
- HS-1225 bowl: 10"W x 14"D x 5" deep
- Cutout: 10-1/2" x 16-3/4"
- 5-1/2"H splashes
- 11-460L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 3-1/2" drain

Model	Description
<b>HS-1220</b>	10" Deep Bowl w/ Side Splashes
<b>HS-1225</b>	5" Deep Bowl w/ Side Splashes

### REPLACEMENT PARTS & ACCESSORIES



Model **11-460L**  
4" Center Faucet with 6" Double Bend Spout



Model **11-435L**  
4" Center Faucet with 4-1/2" Double Bend Spout



Model **21-300L**  
1/4 Turn Ceramic Valves



Model **23-121**  
1-1/2" Drain (Locknut and Washer Included)



Model **23-123**  
3-1/2" Drain (Locknut and Washer Included)



Model **21-198L**  
1/2" x 3/8" Braided Supply Hoses

## Multiple Compartment Drop-In Sinks

All Krowne Drop-In Hand Sinks include Faucet & Drain (unless specified)



### Two Compartment 26" x 18" Overall Drop-In Sink

- (2) 10"W x 14"D x 10" deep bowls
- Cutout: 22-1/4" x 16-3/4"
- Faucet with 8" spout & 1/4 turn ceramic valves,
- 1.8 GPM (faucet only included on model HS-2619)
- 3-1/2" drains

Model	Description	Weight
<b>HS-2619</b>	Includes Faucet	30
<b>HS-2619-LF</b>	Less Faucet	30



### Three Compartment 36" x 18" Overall Drop-In Sink

- (3) 10"W x 14"D x 10" deep bowls
- Cutout: 34-1/4" x 16-3/4"
- 11-412L faucet with 1/4 turn ceramic valves,
- 1.8 GPM (faucet only included on model HS-3819)
- 3-1/2" drains

Model	Description	Weight
<b>HS-3819</b>	Includes Faucet	45
<b>HS-3819-LF</b>	Less Faucet	45

## Specialty Sinks on Legs

Specialty Sinks include Faucet & Drain (unless specified)



### Dump Sink

- 10"W x 14"D x 7" deep bowl
- 10-406L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 1-1/2" drain
- Weight: 40 lbs.

Model	Width	Depth	Wgt.
<b>18-1C</b>	12"	18-1/2"	33



### Convenience Store Sinks

- 19" front to back x 36" working height
- 3-1/2" basket drains
- 10-410L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 10"W x 14"D x 10"H bowl

Model	Width	Drainboard	Wgt.
<b>CS-1836</b>	36"	-	69
<b>CS-1860</b>	60"	(2) 12" ea.	85
<b>CS-1872</b>	72"	(2) 18" ea.	95



### Sinks with Soap & Towel Dispensers

- 10"W x 14"D x 6" deep bowl
- Built-in soap & towel dispenser
- 10-406L faucet with 1/4 turn ceramic valves (1.8 GPM)
- 1-1/2" drain

Model	Width	Depth	Wgt.
<b>18-12DST</b>	12"	23-1/2"	50
<b>18-18ST</b>	18"	18-1/2"	46



# Basin Sinks

Perfect for managing behind-the-scenes tasks without tying up more frequently-used sinks, making our stainless steel basin sinks a must-have for any busy space.

Shown above: Two Compartment Basin Sink BS-1818-2

# Commercial Sinks

- 33" working height
- Rolled edge around bowl(s)
- 18 gauge stainless steel sink
- 304 stainless steel legs
- All commercial sinks are NSF/ANSI-2 approved



## Three Compartment Basin Sink, (3) **NEW** 18" x 18" x 12" Bowls, Left & Right Drainboard

- Commercial sink, 3 compartment with left & right drainboard
- 18" x 18" x 12" bowls, 18" drainboards
- Overall 24" x 90.20" X 43.50"H

**Model**  
**CS-1818-3-LR-LF**

## One Compartment **NEW** Basin Sink, 18" x 18" x 12" Bowl, 18" Left Drainboard

- Commercial sink, single compartment with left drainboard
- 18" x 18" x 12" bowl, 18" drainboard
- Overall 24"x39. 10"x43.50"H



**Model**  
**CS-1818-L-LF**

## One Compartment **NEW** Basin Sink, 18" x 18" x 12" Bowl, 18" Left & Right Drainboard

- Commercial sink, single compartment with left & right drainboard
- 18" x 18" x 12" bowl, 18" drainboards
- Overall 24" x 54. 10" x 43.50"H



**Model**  
**CS-1818-LR-LF**

## One Compartment **NEW** Basin Sink, 18" x 18" x 12" Bowl, Right Drainboard

- Commercial sink, single compartment with right drainboard
- 18" x 18" x 12" bowl, 18" drainboard
- Overall 24" x 39. 10" x 43.50"H



**Model**  
**CS-1818-R-LF**



**NEW**

## One Compartment Basin Sink, 24" x 24" x 12" Bowl, Left & Right Drainboard

- Commercial sink, single compartment with left & right drainboard
- 24" x 24" x 12" bowl, 24" drainboards
- Overall 0" x 72" x 43.50"H

**Model**  
**CS-2424-LR-LF**



**NEW**

## Two Compartment Basin Sink, (2) 24" x 24" x 12" Bowl, Left & Right Drainboard

- Commercial sink, 2 compartment with left & right drainboard,
- 24" x 24" x 12" bowls, 24" drainboards
- Overall 0" x 96.10" x 43.50"H

**Model**  
**CS-2424-2-LR-LF**

# Basin Sinks

- BS-1818 series bowl size: 18" x 18" x 13" deep
- BS-2421 series bowl size: 24" x 21" x 13" deep
- 33" working height
- 3-1/2" drain included in each bowl
- Rolled edge around bowl(s)
- 18 gauge stainless steel sink
- 304 stainless steel legs with plastic bullet feet
- 8" center splash mount faucet with 1/4 turn ceramic valves, 1.8 GPM (spout size varies depending on model)



**One Compartment Basin Sink, 18" x 18" Bowl**

- 21"W x 21-1/2"D x 41"H overall
- 8" center faucet with 8" spout (12-808L)
- Includes Model 21-149L mounting kit for wall mount faucets & pre-rinse units

**Model**  
**BS-1818**



**Two Compartment Basin Sink, (2) 18" x 18" Bowls**

- 39"W x 21-1/2"D x 41"H overall
- 8" center faucet with 12" spout (12-812L)
- Includes Model 21-149L mounting kit for wall mount faucets & pre-rinse units

**Model**  
**BS-1818-2**



**Three Compartment Basin Sink, (3) 18" x 18" Bowls**

- 57"W x 21-1/2"D x 41"H overall
- 8" center faucet with 14" spout (12-814L)
- Includes Model 21-149L mounting kit for wall mount faucets & pre-rinse units

**Model**  
**BS-1818-3**



**One Compartment Basin Sink, 24" x 21" Bowl**

- 27"W x 24-1/2"D x 41"H overall
- 8" center faucet with 8" spout (12-808L)
- Includes Model 21-149L mounting kit for wall mount faucets & pre-rinse units

**Model**  
**BS-2421**



**Two Compartment Basin Sink, (2) 24"x 21" Bowls**

- 51"W x 24-1/2"D x 41"H overall
- 8" center faucet with 12" spout (12-812L)
- Includes Model 21-149L mounting kit for wall mount faucets & pre-rinse units

**Model**  
**BS-2421-2**

## BASIN SINK REPLACEMENT PARTS & ACCESSORIES



Model	Description
<b>12-808L</b>	8" Center Faucet with 8" Spout
<b>12-812L</b>	8" Center Faucet with 12" Spout
<b>12-814L</b>	8" Center Faucet with 14" Spout



**Model**  
**23-123**  
3-1/2" Drain (Locknut and Washer Included)



**Model**  
**21-310L**  
1/4 Turn Ceramic Valves



**Model**  
**21-194L**  
Mounting Kit for Wall Mount Faucets & Pre-Rinse Units

## Drop-In Counter Top Installed Hand Sink

- Bowl: 10"W x 14"D x 5" deep
- Counter top installed
- Front access towel dispenser
- Deck mounted soap dispenser
- Faucet included
- Two models available: one with 4"H backsplash and one with 8"H backsplash
- NSF-2 approved



Model	Backsplash	Bowl
HS-74	4"H	5" Deep

## Sink Strainers



### Dish Table Sink Strainer

- Pre-rinse drain basket
- 18 gauge stainless steel
- Fits 20" x 20" bowl
- 4" deep

Model  
30-150



### 10" x 14" Stainless Steel Sink Strainer

- 5" deep stainless steel
- Fits all 10" x 14" sink bowls
- Used on bar sinks, dump sinks, speed units and blender stations

Model  
30-152

NEW



### 10" x 12" Stainless Steel Sink Strainer

- 5" deep stainless steel
- Fits all 10" x 12" sink bowls
- Used on bar sinks, dump sinks, speed units and blender stations

Model  
30-153



### Universal Plastic Sink Strainer

- 6" deep durable clear plastic
- Fits all 10" x 14" or 10" x 12" sink bowls (with the exception of 14" speed units)
- Used on bar sinks, dump sinks, speed units and blender stations

Model  
30-160

## Floor Strainers



### 8-1/2" Plastic Kitchen Floor Drain Strainer

- Fits in kitchen floor drain
- 8-1/2" x 8-1/2" x 3" overall
- Drains from bottom and sides
- Prevents drain blockage
- Easy to remove and clean

Model  
30-148



### 11-3/4" Plastic Floor Drain Strainer

- Fits into standard floor drain
- 8" x 8" bowl
- 11-3/4" x 11-3/4" overall
- Also fits bar sink bowls
- Easy to remove and clean

Model  
30-141



### 6-1/2" Plastic Floor Drain Strainer

- Fits into floor drain
- 6-1/2" x 6-1/2" x 3" overall
- Prevents drain blockage
- Easy to remove and clean

Model  
30-145



### 8-1/2" Plastic Floor Drain Strainer

- Fits in kitchen floor drain
- 8-1/2" x 8-1/2" x 2" overall
- Prevents drain blockage
- Easy to remove and clean

Model  
30-147

# Movable Gas Connectors



Used with caster-mounted commercial kitchen equipment. Connectors can be matched with a variety of appliances such as ovens, fryers, ranges, grills and more. Pair it with a Quick Disconnect to easily and safely disconnect during routine maintenance or cleaning. Lifetime warranty included.

Natural Gas/Liquid propane only



## PVC Protective Coating

With antimicrobial agent for easy cleaning.

## Radial Wrap

Heavy duty stainless steel radial wrap prevents hose from stretching.

## Corrugated Tubing

Stainless steel corrugated tubing built to be flexible for ease of installation.

## Welded Construction

360° heavy duty welds on both ends increases durability.

## Rotational Ends

360° rotational ends provide versatility and ease during installation.

## Gas Connector Parts & Accessories



### One-Handed Quick Disconnect

w/ 10-Point 360° Locking System

Quickly and easily disconnect hose to move equipment for cleaning and maintenance.



### SwivelKing™

Durable stainless steel construction with dual 360° rotation significantly reduces stress and extends life of hose.



### Restraining Kit

Comes pre-cut 12" shorter than overall length of hose to prevent hose from being pulled too far. Easily disconnects for cleaning and maintenance.



### Caster Positioning Chocks

Creates a home position for movable kitchen equipment. Stainless steel construction eliminates cracking commonly seen with plastic caster positioning sets.



### Full Port Ball Valve

Required by code to allow for manual gas shutoff within 5 ft. of appliance.



### Black Malleable Street 90° Elbows

Allows for versatility in tight conditions during installation.

## Complete Kit

**Includes:**

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows

**Case Quantities**

Select Complete Kits are available in case quantities of 6.



Model	I.D.	Length	BTU/hr*	Case Qty.
M5024K	1/2"	24"	87K	-
M5036K	1/2"	36"	77K	6
M5048K	1/2"	48"	68K	-
M5060K	1/2"	60"	60K	6
M5072K	1/2"	72"	55K	-
M7524K	3/4"	24"	232K	6
M7536K	3/4"	36"	218K	6
M7548K	3/4"	48"	180K	6
M7560K	3/4"	60"	158K	6
M7572K	3/4"	72"	139K	6
M10024K	1"	24"	414K	-
M10036K	1"	36"	379K	6
M10048K	1"	48"	334K	6
M10060K	1"	60"	294K	6
M10072K	1"	72"	279K	-
M12524K	1-1/4"	24"	699K	-
M12536K	1-1/4"	36"	615K	-
M12548K	1-1/4"	48"	541K	-
M12560K	1-1/4"	60"	476K	-
M12572K	1-1/4"	72"	419K	-

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

## Complete Kit with One SwivelKing™

**Includes:**

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows
- SwivelKing™



Model	I.D.	Length	BTU/hr*
M5024K9	1/2"	24"	87K
M5036K9	1/2"	36"	77K
M5048K9	1/2"	48"	68K
M5060K9	1/2"	60"	60K
M5072K9	1/2"	72"	55K
M7524K9	3/4"	24"	232K
M7536K9	3/4"	36"	218K
M7548K9	3/4"	48"	180K
M7560K9	3/4"	60"	158K
M7572K9	3/4"	72"	139K
M10024K9	1"	24"	414K
M10036K9	1"	36"	379K
M10048K9	1"	48"	334K
M10060K9	1"	60"	294K
M10072K9	1"	72"	279K
M12524K9	1-1/4"	24"	699K
M12536K9	1-1/4"	36"	615K
M12548K9	1-1/4"	48"	541K
M12560K9	1-1/4"	60"	476K
M12572K9	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

## Complete Kit with Two SwivelKings™

**Includes:**

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows
- (2) SwivelKings™



Model	I.D.	Length	BTU/hr*
M5024K10	1/2"	24"	87K
M5036K10	1/2"	36"	77K
M5048K10	1/2"	48"	68K
M5060K10	1/2"	60"	60K
M5072K10	1/2"	72"	55K
M7524K10	3/4"	24"	232K
M7536K10	3/4"	36"	218K
M7548K10	3/4"	48"	180K
M7560K10	3/4"	60"	158K
M7572K10	3/4"	72"	139K
M10024K10	1"	24"	414K
M10036K10	1"	36"	379K
M10048K10	1"	48"	334K
M10060K10	1"	60"	294K
M10072K10	1"	72"	279K
M12524K10	1-1/4"	24"	699K
M12536K10	1-1/4"	36"	615K
M12548K10	1-1/4"	48"	541K
M12560K10	1-1/4"	60"	476K
M12572K10	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft<sup>3</sup> Natural Gas at 0.5" wc pressure drop)

## Complete Kit with Two SwivelKings™ & Caster Positioning Chocks

**Includes:**

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows
- (2) SwivelKings™
- Caster Positioning Chocks



Model	I.D.	Length	BTU/hr*
M5024K12	1/2"	24"	87K
M5036K12	1/2"	36"	77K
M5048K12	1/2"	48"	68K
M5060K12	1/2"	60"	60K
M5072K12	1/2"	72"	55K
M7524K12	3/4"	24"	232K
M7536K12	3/4"	36"	218K
M7548K12	3/4"	48"	180K
M7560K12	3/4"	60"	158K
M7572K12	3/4"	72"	139K
M10024K12	1"	24"	414K
M10036K12	1"	36"	379K
M10048K12	1"	48"	334K
M10060K12	1"	60"	294K
M10072K12	1"	72"	279K
M12524K12	1-1/4"	24"	699K
M12536K12	1-1/4"	36"	615K
M12548K12	1-1/4"	48"	541K
M12560K12	1-1/4"	60"	476K
M12572K12	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft<sup>3</sup> Natural Gas at 0.5" wc pressure drop)

## Gas Connector with Quick Disconnect & Restraining Cable Kit

**Includes:**

- Gas Connector
- Quick Disconnect
- Restraining Cable Kit



Model	I.D.	Length	BTU/hr*
M5024K2	1/2"	24"	87K
M5036K2	1/2"	36"	77K
M5048K2	1/2"	48"	68K
M5060K2	1/2"	60"	60K
M5072K2	1/2"	72"	55K
M7524K2	3/4"	24"	232K
M7536K2	3/4"	36"	218K
M7548K2	3/4"	48"	180K
M7560K2	3/4"	60"	158K
M7572K2	3/4"	72"	139K
M10024K2	1"	24"	414K
M10036K2	1"	36"	379K
M10048K2	1"	48"	334K
M10060K2	1"	60"	294K
M10072K2	1"	72"	279K
M12524K2	1-1/4"	24"	699K
M12536K2	1-1/4"	36"	615K
M12548K2	1-1/4"	48"	541K
M12560K2	1-1/4"	60"	476K
M12572K2	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

## Gas Connector with Quick Disconnect

**Includes:**

- Gas Connector
- Quick Disconnect



Model	I.D.	Length	BTU/hr*
M5024K5	1/2"	24"	87K
M5036K5	1/2"	36"	77K
M5048K5	1/2"	48"	68K
M5060K5	1/2"	60"	60K
M5072K5	1/2"	72"	55K
M7524K5	3/4"	24"	232K
M7536K5	3/4"	36"	218K
M7548K5	3/4"	48"	180K
M7560K5	3/4"	60"	158K
M7572K5	3/4"	72"	139K
M10024K5	1"	24"	414K
M10036K5	1"	36"	379K
M10048K5	1"	48"	334K
M10060K5	1"	60"	294K
M10072K5	1"	72"	279K
M12524K5	1-1/4"	24"	699K
M12536K5	1-1/4"	36"	615K
M12548K5	1-1/4"	48"	541K
M12560K5	1-1/4"	60"	476K
M12572K5	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

## Complete Kit For Canada

**Includes:**

- Gas Connector
- Quick Disconnect
- Shut-off Valve
- Restraining Cable Kit
- (2) 90° Elbows with Nipples

Case Quantity: 6



Model	I.D.	Length	BTU/hr*
C5024K	1/2"	24"	87K
C5036K	1/2"	36"	77K
C5048K	1/2"	48"	68K
C5060K	1/2"	60"	60K
C5072K	1/2"	72"	55K
C7524K	3/4"	24"	232K
C7536K	3/4"	36"	218K
C7548K	3/4"	48"	180K
C7560K	3/4"	60"	158K
C7572K	3/4"	72"	139K
C10024K	1"	24"	414K
C10036K	1"	36"	379K
C10048K	1"	48"	334K
C10060K	1"	60"	294K
C10072K	1"	72"	279K
C12524K	1-1/4"	24"	699K
C12536K	1-1/4"	36"	615K
C12548K	1-1/4"	48"	541K
C12560K	1-1/4"	60"	476K
C12572K	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

## Gas Connector Hose Only

**Includes:**

- Gas Connector



Model	I.D.	Length	BTU/hr*
M5024	1/2"	24"	87K
M5036	1/2"	36"	77K
M5048	1/2"	48"	68K
M5060	1/2"	60"	60K
M5072	1/2"	72"	55K
M7524	3/4"	24"	232K
M7536	3/4"	36"	218K
M7548	3/4"	48"	180K
M7560	3/4"	60"	158K
M7572	3/4"	72"	139K
M10024	1"	24"	414K
M10036	1"	36"	379K
M10048	1"	48"	334K
M10060	1"	60"	294K
M10072	1"	72"	279K
M12524	1-1/4"	24"	699K
M12536	1-1/4"	36"	615K
M12548	1-1/4"	48"	541K
M12560	1-1/4"	60"	476K
M12572	1-1/4"	72"	419K

\*Minimum Flow Capacity  
(0.64 Sp. Gr., 1000 BTU/ft3 Natural Gas at 0.5" wc pressure drop)

# Gas Connector Parts & Accessories



## SwivelKing™ Connector

- Allows gas hose to swivel in tight areas
- Reduces stress on the hose from bending
- Full gas flow with no restriction
- 360° full rotation
- Female NPT x Male NPT

Model	Fits
<b>SW50</b>	Fits 1/2" Gas Connectors
<b>SW75</b>	Fits 3/4" Gas Connectors
<b>SW100</b>	Fits 1" Gas Connectors
<b>SW125</b>	Fits 1-1/4" Gas Connectors



SwivelKing installed on a gas connector.



QD75

## Quick Disconnect

- Allow for easy disconnect to move equipment for maintenance and cleaning

Model	Size
<b>QD50</b>	Fits 1/2" Connectors
<b>QD75</b>	Fits 3/4" Connectors
<b>QD100</b>	Fits 1" Connectors
<b>QD125</b>	Fits 1-1/4" Connectors



R36

## Restraining Cable Kit

- Restraining cable is 12" shorter than hose length to prevent over extension
- Mounting hardware included

Model	Size
<b>R24</b>	Used with 24" Connectors
<b>R36</b>	Used with 36" Connectors
<b>R48</b>	Used with 48" Connectors
<b>R60</b>	Used with 60" Connectors
<b>R72</b>	Used with 72" Connectors



G75

## Full Port Ball Valve

- Required by code to allow manual gas shutoff within 5 ft. of appliance

Model	Size
<b>G50</b>	1/2" Female NPT Ball Valve
<b>G75</b>	3/4" Female NPT Ball Valve
<b>G100</b>	1" Female NPT Ball Valve
<b>G125</b>	1-1/4" Female NPT Ball Valve



E75

## Black Malleable Street 90° Elbows

Model	Size
<b>E50</b>	1/2" Female x Male NPT
<b>E75</b>	3/4" Female x Male NPT
<b>E100</b>	1" Female x Male NPT
<b>E125</b>	1-1/4" Female x Male NPT



C75

## Black Malleable 90° Elbows with Nipples

Model	Size
<b>C50</b>	(2) 1/2" Elbows, (2) 1/2" Nipples
<b>C75</b>	(2) 3/4" Elbows, (2) 3/4" Nipples
<b>C100</b>	(2) 1" Elbows, (2) 1" Nipples
<b>C125</b>	(2) 1-1/4" Elbows, (2) 1-1/4" Nipples



RB7550

## Black Malleable Reducing Bushing

- Converts gas equipment w/ 3/4" inlet to use 1/2" gas connector for higher BTU flow
- 3/4" Male x 1/2" Female NPT

Model	Size
<b>RB7550</b>	3/4" x 1/2" Bushing

# Gas Connector Parts & Accessories

## Rear Caster Positioning Chocks



- Creates a home position for all movable kitchen equipment
- Ensures kitchen equipment is returned back to the proper location in relation to fire suppression and ventilation systems after removal for cleaning and maintenance
- Can be used with all caster-mounted equipment
- Fits all caster sizes
- Includes (2) rear chocks and mounting hardware
- Meets NFPA Codes 17A (5.64) & 96 (12.1.3) related to fire suppression systems
- Case quantity: 12 per



Rear Caster Chock creates a home position for caster-mounted kitchen equipment.

Model	Description	Case Qty.
<b>28-200</b>	Rear Caster Positioning Chocks	<b>12</b>

## Front Caster Positioning Chocks



- Requires our 28-200 Rear Caster Chocks, cannot be used independently
- Creates a home position for all movable kitchen equipment
- Ensures kitchen equipment is returned back to the proper location in relation to fire suppression and ventilation systems after removal for cleaning and maintenance
- Can be used with all caster-mounted equipment
- Fits all caster sizes
- Includes (2) front chocks and mounting hardware

**NEW**



Designed to work with our 28-200 Rear Caster Chocks.

Model	Description
<b>28-201</b>	Front Caster Positioning Chocks

## Gas Appliance Regulators

- Used on foodservice kitchen equipment
- High strength aluminum casting
- RL50 & RL75 are set @ 10.0" W.C. with 5.0-12.0 spring installed
- RG50 & RG75 are set @ 3.5" W.C. with 3.0-6.0 spring installed
- Flow does not adjust
- To be used closest to the equipment

Model	Size
<b>RL50</b>	1/2" NPT for Liquid Propane
<b>RL75</b>	3/4" NPT for Liquid Propane
<b>RG50</b>	1/2" NPT for Natural Gas
<b>RG75</b>	3/4" NPT for Natural Gas




RG75

## Counter Top Gas Connector Display

- 3/4" Stationary gas connector with shut-off valve
- 3/4" Movable gas connector with SwivelKing
- 3/4" Movable gas connector with quick disconnect
- Comes fully assembled



DISP-TTGASCONNECT

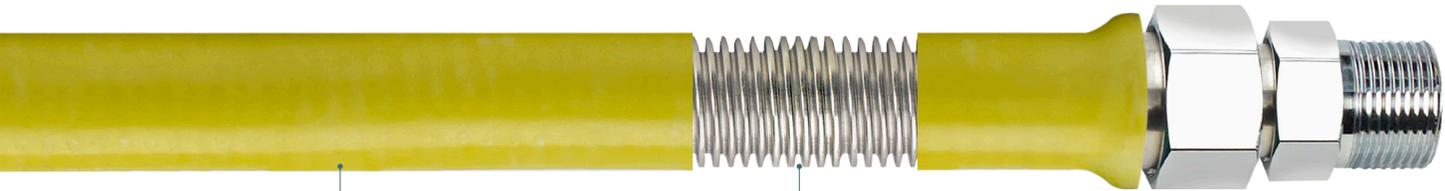

### Antimicrobial Yellow Coating

PVC protective coating is applied for added strength and durability.

### Stainless Steel Construction

304 stainless steel tubing provides flexibility and versatility during installation.

### Durable Stainless Steel Fittings

Swivel fittings and corrosion-resistant and extend connector longevity.

## Stationary Gas Connectors & Kits

- Use for stationary commercial gas cooking equipment
- Stainless steel with PVC antimicrobial coating
- 36"L connector 256K BTU/hr\*, 48"L connector 225K BTU/hr\*
- Flare fittings: 1 male 1 female

Model	Length	Hose I.D.	Gas Connector	Ball Valve	90° Elbows	Reducer**
<b>S5036</b>	36"	3/4"	✓	-	-	✓
<b>S5036B</b>	36"	3/4"	✓	-	-	✓
<b>S5036K</b>	36"	3/4"	✓	✓	✓	✓
<b>S5048</b>	48"	3/4"	✓	-	-	✓
<b>S5048B</b>	48"	3/4"	✓	-	-	✓
<b>S5048K</b>	48"	3/4"	✓	✓	✓	✓
<b>S7536</b>	36"	3/4"	✓	-	-	-
<b>S7536B</b>	36"	3/4"	✓	-	-	-
<b>S7536K</b>	36"	3/4"	✓	✓	✓	-
<b>S7548</b>	48"	3/4"	✓	-	-	-
<b>S7548B</b>	48"	3/4"	✓	-	-	-
<b>S7548K</b>	48"	3/4"	✓	✓	✓	-

S7536 and S7548 are packed in poly bags. All other models packed in color boxes.  
 \*Flow Rating (0.64 Sp. Gr. at 0.5" wc pressure drop \*\*Includes 1/2" Reducer



S7548

### Stationary Gas Connector Reducer



Model	Description
<b>GHR-7550</b>	3/4" to 1/2" NPT Reducer for Stationary Gas Connectors

# Stationary Gas Connectors

Durable stainless steel tubing with swivel end fittings allow for easy install in commercial fixed gas appliances. Antimicrobial and UV resistant protective coating ensure a safe long lasting operation. Available in multiple lengths, interior diameters and kit configurations.

# Casters

Fit for a wide variety of restaurant equipment such as ranges, ovens, worktables and fryers. All four braking casters are guaranteed to stay put or easily roll out for cleaning. From plate casters to threaded stem casters, we've got the model you need.



<https://krowne.com/crossover>






### Adjustable 6" - 7" Height Universal Plate Caster with Front Brake \*\*

- Fits most manufacturers
- 6" to 7" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case
- Plate casters take 1/4" 20 1/2" long self tapping screws

#### Fits hole patterns:

1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



**Model**  
**28-114S**




### Heavy Duty Adjustable 6" - 7" Height Universal Plate Caster with Front Brake \*\*

- Fits most manufacturers
- 6" to 7" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Heavy duty weight capacity 500 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 3 per case

#### Fits hole patterns:

1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



**Model**  
**28-135S**




### Adjustable 6" - 7" Height 2-3/8" x 3-5/8" Plate Caster with Front Brake \*\*

#### Fits Dean\* Fryers

- 6" to 7" height adjustment
- 2-3/8" x 3-5/8" plate
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

#### Fits hole pattern:

1-3/4" x 3"



**Model**  
**28-160S**




### Adjustable 8-1/2" - 10-1/2" Height Plate Caster for Fryers \*\*

#### Fits Pitco\* Fryers

- 8-1/2" to 10-1/2" height adjustment
- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

#### Fits hole patterns:

1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



**Model**  
**28-117S**



### Adjustable 6" - 7" Height 1/2"-13 Threaded Stem Caster with Front Brake

#### Fits True\*

- 6" to 7" height adjustment
- 1/2"-13 x 1" threaded stem
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 200 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

**Model**  
**28-156S**



### Adjustable 6" - 7" Height 3/4"-10 Threaded Stem Caster with Front Brake

#### Fits Garland\* & Southbend\* Ranges & Ovens

- 6" to 7" height adjustment
- 3/4"-10 x 1" threaded stem
- 3" grease resistant wheels
- Total lock front brake prevents swivel and locks wheel in place
- Weight capacity 200 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

**Model**  
**28-158S**



### 1-5/8" Stem Worktable Caster Used on Standard 1-5/8" Diameter Legs

- Fits standard 1-5/8" tubing
- Used on worktables
- Grease resistant wheels with side brakes
- Weight capacity per caster - 28-125S: 220 lbs, 28-129S: 250 lbs.
- Raises height of equipment 1" higher than wheel size
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 28-125S case quantity: 6 per case
- 28-129S case quantity: 4 per case

Model	Height	Wheel Size
<b>28-125S</b>	4" Overall	3" Wheels
<b>28-129S</b>	6" Overall	5" Wheels



### 1-1/2" Stem Worktable Caster Used on 1-1/2" Diameter Legs

- Fits 1-1/2" tubing
- Used on worktables
- Grease resistant wheels with side brakes
- Weight capacity 220 lbs. per caster
- Raises height of equipment 1" higher than wheel size
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 28-118S case quantity: 6 per case
- 28-124S case quantity: 4 per case

Model	Height	Wheel Size
<b>28-118S</b>	4" Overall	3" Wheels
<b>28-124S</b>	6" Overall	5" Wheels


\*This product is not manufactured or authorized by any other manufacturer. Registered Trade Name or Mark of the original manufacturer of the product which this part fits, is not owned, associated or to be confused with our company.



### 2" Overall Ultra Low Profile Universal Plate Caster, 3-1/2" x 3-1/2"

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- 1" wheels with front brakes
- Raises height of equipment 2"
- Weight capacity 200 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 12 per case

Fits hole patterns:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"




**Model**  
**28-109S**



### 3" Overall Low Profile Plate Caster, 3-1/2" x 3-1/2"

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- 2" wheels with side brakes
- Raises height of equipment 3"
- Weight capacity 200 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 10 per case

Fits hole patterns:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



**Model**  
**28-110S**




### Universal Plate Casters, 3-1/2" x 3-1/2"

Fits Pitco\* Fryers & Most Other Manufacturers

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- Grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity 250 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole patterns:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



Model	Height	Wheel Size
<b>28-111S</b>	6" Overall	5" Wheels
<b>28-115S</b>	5" Overall	4" Wheels
<b>28-116S</b>	4" Overall	3" Wheels




### Universal Plate Caster, 4" x 4"

3" or 5" Wheel

- 4" x 4" universal plate
- Grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity per caster  
28-101S: 220 lbs.  
28-107S: 250 lbs.
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole patterns:  
1-3/4" x 3" or  
3" x 3"




Model	Height	Wheel Size
<b>28-101S</b>	4" Overall	3" Wheels
<b>28-107S</b>	6" Overall	5" Wheels



### 6" Overall Heavy Duty Universal Plate Caster, 3-1/2" x 3-1/2" with Front Brake

- Fits most manufacturers
- 3-1/2" x 3-1/2" universal plate
- 5" grease resistant wheels with front brakes
- Raises height of equipment 6"
- Heavy duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case

Fits hole patterns:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"




Model  
**28-260S**



### 6" Overall Heavy Duty Universal Plate Caster, 4" x 4"

- 4" x 4" universal plate
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case

Fits hole patterns:  
1-3/4" x 3" or  
3" x 3"




Model  
**28-120S**



### 6" Overall Plate Caster, 2-3/8" x 3-5/8"

- 2-3/8" x 3-5/8" plate
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 250 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Fits hole pattern:  
1-3/4" x 2-3/4"



Model  
**28-113S**



### 6" Overall Universal Wire Shelving Caster

- Fits standard 1" diameter wire shelving posts
- (2) Allen screws fasten caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case



Model  
**28-151S**



### 6" Overall 1" Square Post Wire Shelving Caster

Fits Amco\* Shelving

- Fits 1" square posts
- (2) Allen screws fasten caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case



Model  
28-172S



### 6" Overall 1-1/4" Square Post Shelving Caster

Fits Cambro\* Camshelving

- Fits 1-1/4" square posts
- (2) Allen screws fasten caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 6 per case



Model  
28-174S



### Heavy Duty Adjustable Height Stem Caster for Single Deck Convection Oven

Fits Vulcan\*, Hobart\* and Wolf\*

- 4" grease resistant wheels
- Raises height of equipment 5" - 6-1/4"
- Total lock front brake prevents swivel and locks wheel in place
- Heavy duty weight capacity 350 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Model  
28-136S




### 4" Overall M14 x 2.0 Metric Threaded Stem Caster

Fits Atosa\* Refrigeration

- M14 stem caster, 1" long
- 3" grease resistant wheels with side brakes
- Raises height of equipment 4"
- Fits imported refrigeration
- Weight capacity 220 lbs. per caster
- Temperature range of 4°F to 176°F
- Refrigeration units with 3 or more doors require 2 sets
- 4 pieces per set
- Case quantity: 4 per case

Model  
28-164S



## 2" Overall Ultra Low Profile 4" x 5" Plate Caster

### Fits True\* Refrigeration


- 1" grease resistant wheels with front brakes
- Raises height of equipment 2"
- Weight capacity 200 lbs. per caster
- Refrigeration units with 3 or more doors require 2 sets
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Mounting bolts included
- Case quantity: 10 per case

Fits hole pattern:

2-7/8" x 4"



**Model**  
**28-168S**



## 3" Overall Low Profile 4" x 5" Plate Caster

### Fits True\* Refrigeration


- 2" grease resistant wheels with side brakes
- Raises height of equipment 3"
- Weight capacity 200 lbs. per caster
- Refrigeration units with 3 or more doors require 2 sets
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Mounting bolts included
- Case quantity: 8 per case

Fits hole pattern:

2-7/8" x 4"



**Model**  
**28-169S**



## 4" Overall 4" x 5" Plate Caster

### Fits True\* Refrigeration

- 3" grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Mounting bolts included
- 28-170S case quantity: 4 per case

Fits hole pattern:

2-7/8" x 4"



Model	Wheel Size
<b>28-170S</b>	3" Wheels (set of 4)
<b>28-193S</b>	3" Wheels (set of 6)



## 5" Overall 4" x 5" Plate Caster

### Fits True\* Refrigeration

- 4" grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Mounting bolts included
- 28-171S case quantity: 4 per case

Fits hole pattern:

2-7/8" x 4"



Model	Wheel Size
<b>28-171S</b>	4" Wheels (set of 4)
<b>28-194S</b>	4" Wheels (set of 6)



### 6" Overall 5/8" and 3/4" Threaded Stem Caster For Ranges and Ovens

- 1" long threaded stem caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 4°F to 176°F
- 4 pieces per set
- Case quantity: 4 per case

Model	Wheel Size
<b>28-145S</b>	5" Wheel, 5/8" - 11 Thread
<b>28-146S</b>	5" Wheel, 3/4" - 10 Thread



### 6" Overall Heavy Duty Threaded Stem Caster For Griddles, Ranges and Ovens

- Threaded Stem
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 28-147S case quantity: 3 per case
- 28-185S case quantity: 4 per case

Model	Wheel Size
<b>28-147S</b>	3/4" - 10 Thread, Fits Garland & Southbend Range Ovens
<b>28-185S</b>	5/8" - 11 Thread, 5" Fits Jade



### 1/2" - 13 Threaded Stem Caster Threaded for Refrigeration

- 1" long threaded stem
- Grease resistant wheels with side brakes
- Raises height of equipment 1" higher than wheel size
- Temperature range: 4°F to 176°F
- 4 pieces per set
- 28-139S case quantity: 12 per case
- 28-140S case quantity: 6 per case
- 28-144S case quantity: 4 per case
- 28-141S case quantity: 4 per case


Model	Height	Wheel Size	Weight Capacity
<b>28-139S</b>	3" Overall	2" Wheel	200 lbs. per caster
<b>28-140S</b>	4" Overall	3" Wheel	220 lbs. per caster
<b>28-144S</b>	5" Overall	4" Wheel	220 lbs. per caster
<b>28-141S</b>	6" Overall	5" Wheel	220 lbs. per caster



### 6" Overall Heavy Duty Large Triangle Plate Caster Fits Blodgett\* Convection Ovens

- 5-3/8" x 5-3/8" x 7-1/2" triangle plate caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case

Fits hole pattern:  
4-1/8" x 4-1/8" x 5-3/4"




Model  
**28-161S**



## 6" Overall Heavy Duty Convection Oven Triangle Plate Caster

Fits Garland \*

- 6" x 6" x 7-1/2" triangle plate caster
- 5" grease resistant wheels with side brakes
- Raises height of equipment 6"
- Heavy duty weight capacity 500 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 3 per case




Model  
**28-166S**



## 7-1/4" Overall Extra Heavy Duty Large Plate Caster

Fits Vulcan\* & Hobart\* Double Stack Convection Ovens

- 4-1/2" x 4-1/8" plate
- 6" grease resistant wheels
- (2) wheels with side brakes, (2) wheels without brakes
- Raises height of equipment 7-1/4"
- Extra heavy duty weight capacity 750 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- 2 with brakes 2 without brakes
- Case quantity: 2 per case




Model  
**28-180S**



## 6" Overall Sheet Pan Rack Stem Caster for Aluminum Racks

- 5" grease resistant locking wheels with side brakes
- Raises height of equipment 6"
- Weight capacity 220 lbs. per caster
- Temperature range of 14°F to 212°F
- 4 pieces per set
- Case quantity: 4 per case

Model  
**28-130S**



**Need assistance with choosing the correct caster?  
We got you covered!**


**1** Visit [krowne.com/crossover](http://krowne.com/crossover)  
Enter your equipment's model number to pull up the correct caster.

**2** We offer actual size print-outs of our caster plates on [krowne.com](http://krowne.com)  
Simply print and hold it up to your equipment to confirm the match!

## Economy Casters

### 6" Overall 4" x 4" Universal Plate Caster

- Fits most manufacturers
- Universal 4" x 4" plate
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case quantity: 4 per case




Fits hole patterns:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



Model  
30-107S

### 6" Overall 3-1/2" x 3-1/2" Universal Plate Caster

- Universal 3-1/2" x 3-1/2" plate
- Fits most manufacturers
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Side brakes on all (4) casters
- Case quantity: 4 per case




Fits hole patterns:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"



Model  
30-111S

### 6" Overall 2-3/8" x 3-5/8" Plate Caster

- 2-3/8" x 3-5/8" plate
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case quantity: 4 per case
- Side brakes on all 4 casters



Fits hole pattern  
1-3/4" x 3"



Model  
30-113S

### 6" Overall Universal Wire Shelving Caster

- Fits standard 1" diameter wire shelving posts
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Side brakes on all (4) casters
- Case quantity: 4 per case



Model  
30-151S

### 6" Overall 1-5/8" Stem Worktable Caster Used on Standard 1-5/8" Diameter Legs

- Fits standard 1-5/8" tubing
- Used on worktables
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Side brakes on all (4) casters
- Case quantity: 4 per case



Model  
30-129S

### 6" Overall 1-1/2" Stem Worktable Caster Used on Standard 1-1/2" Diameter Legs

- Fits 1-1/2" tubing
- Used on worktables
- 5" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Side brakes on all (4) casters
- Case quantity: 6 per case




Model  
30-125S

### Adjustable 8-1/2" - 10-1/2" Height Plate Caster for Fryers

Fits Pitco\* Fryers

- 3-1/2" x 3-1/2" plate
- 3" grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set
- Side brakes on all (4) casters
- Case quantity: 4 per case

Fits hole pattern:  
1-3/4" x 2-3/4" or  
2-3/4" x 2-3/4"




Model  
30-117S

### 6" Overall Heavy Duty Large Triangle Plate Caster

Fits Blodgett\* Convection Ovens

- 5-3/8" x 5-3/8" x 7-1/2" triangle plate caster
- 5" Grease resistant wheels
- Heavy duty weight capacity 500 lbs per caster
- 4 pieces per set (2 with brake, 2 without)
- Case quantity: 3 per case



Model  
30-161S

### 6" Overall 3/4" Threaded Stem Caster For Ranges and Ovens

- 1" long threaded stem
- 5" grease resistant wheels, 3/4" - 10 Thread
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case quantity: 4 per case



Model  
30-146S

### 6" Overall Low Profile 1/2" - 13 Threaded Stem Caster Threaded for Refrigeration

- 1" long threaded stem
- 5" Grease resistant wheels
- Weight capacity 200 lbs per caster
- 4 pieces per set (2 w/brake, 2 without)
- Case quantity: 4 per case



Model  
30-141S

10-400L.....	61	14-510L.....	48	15-425L-W-E2.....	35	16-150.....	86
10-400L-W.....	61	14-521L.....	51	15-501L.....	34	16-151L.....	86
10-406L.....	61	14-530L.....	50	15-501L-W-E4.....	34	16-152L.....	85
10-410L.....	61	14-546L.....	51	15-502L.....	34	16-153L.....	86
10-435L.....	61	14-550L.....	49	15-506L.....	34	16-158.....	86
10-435L-W.....	61	14-560L.....	50	15-508L.....	34	16-159.....	86
11-400L.....	62	14-570L.....	49	15-508L-W-E4.....	34	16-160L.....	39
11-400L-W.....	63	14-580L.....	49	15-510L.....	34	16-161L.....	39
11-401L.....	62	14-801L.....	32	15-512L.....	34	16-162L.....	39
11-406L.....	62	14-801L-W-E4.....	32	15-512L-W-E4.....	34	16-163L.....	39
11-412L.....	62	14-802L.....	32	15-514L.....	34	16-165.....	85
11-435L.....	62	14-802L-W-E4.....	32	15-516L.....	34	16-170L.....	40
11-450L.....	62	14-806L.....	32	15-525L.....	34	16-171L.....	40
11-460L.....	62	14-808L.....	32	15-525L-W-E2.....	34	16-178L.....	39
12-8XXL.....	61	14-808L-W-E4.....	32	15-601L.....	38	16-179L.....	39
12-170L.....	78	14-810L.....	32	15-612L.....	38	16-181L.....	39
12-171L.....	78	14-812L.....	32	15-625L.....	38	16-182L.....	39
12-510L.....	63	14-812L-W-E4.....	32	15-801L.....	36	16-186.....	58
12-512.....	63	14-814L.....	32	15-801L-W-E4.....	36	16-189.....	58
12-525L.....	63	14-816L.....	32	15-802L.....	36	16-190.....	55
12-801L.....	61	14-818L.....	32	15-806L.....	36	16-191.....	55
12-802L.....	61	14-824L.....	32	15-808L.....	36	16-196.....	56
12-806L.....	61	14-840L.....	52	15-808L-W-E4.....	36	16-196P.....	56
12-808L.....	61	14-841L.....	52	15-810L.....	36	16-196P8.....	56
12-810L.....	61	15-3XXL.....	33	15-812L.....	36	16-197.....	55
12-812L.....	61	15-3XXL-W.....	33	15-812L-W-E4.....	36	16-198.....	58
12-814L.....	61	15-4XXL.....	35	15-814L.....	36	16-199.....	58, 59
12-816L.....	61	15-4XXL-W.....	35	15-818L.....	36	16-200L.....	41
12-818L.....	61	15-5XXL.....	34	15-825L.....	36	16-201L.....	41
12-824L.....	61	15-5XXL-W.....	34	15-825L-W-E2.....	36	16-202L.....	41
13-8XXL.....	64	15-8XXL.....	36	16-1XXL.....	66	16-203L.....	41
13-222L.....	78	15-8XXL-W.....	36	16-2XXL.....	41	16-220L.....	78
13-223L.....	78	15-301L.....	33	16-33XL.....	41	16-232L.....	98
13-225L.....	78	15-301L-W-E4.....	33	16-108L.....	64	16-250L.....	39
13-801L.....	64	15-302L.....	33	16-109L.....	64	16-251L.....	39
13-802L.....	64	15-306L.....	33, 37	16-115L.....	64	16-252L.....	39
13-806L.....	64	15-308L.....	33	16-116L.....	64	16-253L.....	39
13-808L.....	64	15-308L-W-E4.....	33	16-120L.....	98	16-281.....	65
13-810L.....	64	15-310L.....	33	16-121L.....	98	16-282.....	65, 67
13-812L.....	64	15-312L.....	33	16-127.....	37	16-283.....	65, 67
13-814L.....	64	15-312L-W-E4.....	33	16-127-W.....	37	16-290.....	67
13-816L.....	64	15-314L.....	33	16-128.....	37	16-301L.....	41
13-818L.....	64	15-316L.....	33	16-129.....	37	16-302L.....	41
13-824L.....	64	15-325L.....	33	16-130L.....	40	16-306L.....	41
14-4XXL.....	31	15-325L-W-E2.....	33	16-131L.....	40	16-312L.....	41
14-4XXL-W.....	31	15-350L.....	33, 37	16-132L.....	40	16-330L.....	41
14-8XXL.....	32	15-401L.....	35	16-133L.....	40	16-331L.....	41
14-8XXL-W.....	32	15-401L-W-E4.....	35	16-135L.....	85	16-332L.....	41
14-400L.....	31	15-402L.....	35	16-136L.....	85	16-333L.....	41
14-400L-W-E2.....	31	15-406L.....	35	16-137L.....	85	16-350L.....	64
14-401L.....	31	15-408L.....	35	16-138L.....	85	16-351L.....	64
14-401L-W-E4.....	31	15-408L-W-E4.....	35	16-139L.....	85	16-352L.....	64
14-402L.....	31	15-410L.....	35	16-140L.....	40	16-402L.....	58
14-406L.....	31	15-412L.....	35	16-141L.....	40	16-405L.....	58
14-406L-W-E4.....	31	15-412L-W-E4.....	35	16-142L.....	40	16-406L.....	98
14-408L.....	31	15-414L.....	35	16-143L.....	40	16-407L.....	98
14-410L.....	31	15-418L.....	35	16-144-B.....	86	16-407L-KIT.....	40
14-410L-W-E4.....	31	15-425L.....	35	16-149.....	86	16-440.....	86

16-441.....	86	19-101L.....	79	21-118L.....	47	21-213.....	78
16-442.....	86	19-108L.....	79	21-125L.....	47	21-214.....	78
16-443.....	86	19-112L.....	80	21-126.....	80	21-215.....	77
16-446.....	86	19-201L.....	79	21-127L.....	29	21-216.....	77
16-450L.....	50	19-203L.....	79	21-129L.....	28, 29	21-217.....	77
16-470L.....	52	19-204L.....	79	21-130L.....	29	21-218.....	77
16-501.....	58	19-208L.....	79	21-131L.....	29	21-227L.....	46
16-505.....	58	19-220L.....	67	21-132L.....	29	21-228L.....	46
16-506.....	58	19-221L.....	67	21-133L.....	28, 29	21-229L.....	46
16-510.....	58	19-222L.....	67	21-134L.....	29	21-244L.....	77
16-511.....	58	19-223L.....	67	21-135L.....	29	21-248L.....	77
16-512.....	58	19-224L.....	67	21-136L.....	29	21-258L.....	77
16-513.....	59	19-225L.....	67	21-137.....	28	21-300L.....	66
16-514.....	59	19-226L.....	67	21-138L.....	29	21-302L.....	28, 29
16-516.....	59	19-227L.....	67	21-139L.....	29	21-305.....	66
16-517.....	58	19-228L.....	67	21-140L.....	29	21-306.....	44
16-550L.....	86	19-229L.....	67	21-141L.....	29	21-306-A.....	44
16-645.....	57	19-301.....	83	21-142.....	29	21-307L.....	86
16-648.....	85	19-302.....	83	21-143.....	29	21-308L.....	23
16-649.....	57	19-303.....	83	21-144.....	79	21-309L.....	23
16-649P.....	57	19-400B.....	9	21-145.....	29	21-310L.....	66
16-649P8.....	57	19-400C.....	9	21-148.....	29	21-311.....	44, 65
16-650.....	57	19-400G.....	9	21-149L.....	29	21-312.....	66
16-650P.....	57	19-400S.....	9	21-150L.....	29	21-313.....	31, 44
16-650P8.....	57	19-401B.....	9	21-160-3L.....	26	21-320L.....	45
16-654.....	56	19-401C.....	9	21-160-8L.....	26, 27	21-321L.....	45
16-654P.....	56	19-401G.....	9	21-160-24L.....	28	21-325L.....	66
16-654P8.....	56	19-401S.....	9	21-160L.....	28	21-330L.....	44
16-655.....	57	19-410B.....	11	21-161L.....	28	21-331L.....	44
16-656.....	57	19-410C.....	11	21-162.....	28	21-333L.....	44, 49
16-657.....	59	19-410G.....	11	21-163.....	27	21-334L.....	44, 49
16-670.....	19, 55	19-410S.....	11	21-164L.....	28	21-340L.....	63
16-675.....	19, 55	19-420B.....	11	21-165.....	28	21-341.....	63
17-108WL.....	22	19-420C.....	11	21-166L.....	28	21-343L.....	9
17-109WL.....	22	19-420G.....	11	21-168.....	28	21-344L.....	49
17-109X.....	22	19-420S.....	11	21-170.....	28	21-345L.....	41, 48
17-124WL.....	25	19-430B.....	10	21-171.....	28	21-346.....	41, 48, 51
17-202WL.....	23	19-430C.....	10	21-179L.....	26, 28	21-350L.....	44
17-204WL.....	24	19-430G.....	10	21-181L.....	25, 29	21-351L.....	44
17-206WL.....	23	19-430S.....	10	21-184L.....	29	21-355L.....	66
17-208WL.....	24	20-101L.....	81	21-185L.....	29	21-363L.....	50
17-310.....	9, 25	20-108L.....	77, 81	21-189L.....	29	21-400L.....	67
17-312WL.....	25	20-201L.....	81	21-190L.....	43	21-401L.....	45
17-XXXL.....	28	20-203L.....	81	21-191L.....	43	21-402L.....	45
18-1C.....	100	20-204L.....	81	21-192L.....	43	21-403L.....	45
18-12DST.....	100	20-208L.....	81	21-193L.....	43	21-404L.....	46
18-18ST.....	100	20-302.....	67	21-194L.....	43	21-405L.....	46
18-406L.....	27	21-1XXL.....	41	21-195L.....	23, 41	21-407.....	45
18-408L.....	27	21-2XXL.....	77	21-196L.....	43	21-420L.....	46
18-506L.....	27	21-101L.....	28	21-198L.....	43	21-420L-X.....	46
18-508L.....	27	21-108L.....	28	21-199L.....	43	21-421L.....	46
18-606L.....	27	21-109L.....	47	21-201L.....	28	21-421L-X.....	46
18-608L.....	27	21-110L.....	47	21-202L.....	28	21-422L.....	46
18-706L.....	27	21-112L.....	47	21-204L.....	28	21-422L-X.....	46
18-708L.....	27	21-113L.....	47	21-208L.....	28	21-423L.....	46
18-725L.....	20, 26	21-114L.....	47	21-210.....	78	21-423L-X.....	46
18-812L.....	38	21-115L.....	47	21-211.....	78	21-424L.....	46
18-814L.....	38	21-117L.....	47	21-212.....	78	21-424L-X.....	46

21-425L.....	46	22-507.....	71	22-633L.....	53	25-201S.....	82
21-425L-X.....	46	22-508.....	69	22-634L.....	53	28-101S.....	116
21-426L.....	46	22-509.....	69	22-640L.....	53	28-107S.....	116
21-427L.....	46	22-515.....	71	22-650L.....	53	28-109S.....	116
21-427L-X.....	46	22-516.....	66, 67, 70, 71	22-671L.....	19, 55	28-110S.....	116
21-428L.....	46	22-517.....	69	22-672L.....	19, 55	28-111S.....	116
21-428L-X.....	46	22-519.....	71	22-800.....	69	28-113S.....	117
21-429L.....	46	22-528.....	71	22-850.....	19, 69	28-114S.....	114
21-429L-X.....	46	22-528-S.....	71	22-850-S.....	19, 69	28-115S.....	116
21-430L.....	46	22-529.....	71	22-851.....	19, 69	28-116S.....	116
21-430L-X.....	46	22-529-S.....	71	22-870.....	71	28-117S.....	114
21-431L.....	46	22-530.....	71	23-110.....	72	28-118S.....	115
21-431L-X.....	46	22-532.....	69	23-111.....	72	28-120S.....	117
21-432L.....	46	22-533.....	69	23-111-A.....	72	28-124S.....	115
21-432L-X.....	46	22-534.....	69	23-118.....	72	28-125S.....	115
21-433L.....	19, 55	22-539.....	70	23-120.....	72	28-129S.....	115
21-435L.....	46	22-540.....	70	23-121.....	72	28-130S.....	121
21-440L.....	42	22-572L.....	53	23-122.....	72	28-135S.....	114
21-441L.....	46	22-573L.....	53	23-123.....	72	28-136S.....	118
21-442L.....	46	22-574L.....	53	23-130.....	72	28-139S.....	120
21-443L.....	42	22-575L.....	53	23-138.....	72	28-140S.....	120
21-444L.....	42	22-576L.....	53	23-145.....	37, 65	28-141S.....	120
21-445L.....	18, 42	22-577L.....	53	23-150.....	73	28-144S.....	120
21-447L.....	40	22-578L.....	53	23-151.....	73	28-145S.....	120
21-450L.....	47	22-579L.....	53	23-152.....	72	28-146S.....	120
21-451.....	98	22-580L.....	53	23-153.....	72	28-147S.....	120
21-452L.....	45	22-581L.....	53	23-154.....	73	28-151S.....	117
21-455L.....	47	22-584L.....	53	23-155.....	73	28-156S.....	115
21-458L.....	38, 46	22-585L.....	53	23-156.....	73	28-158S.....	115
21-460L.....	38, 46	22-586L.....	53	23-157.....	98	28-160S.....	114
21-461L.....	38, 46	22-587L.....	53	23-159.....	72	28-161S.....	120
21-463L.....	38, 46	22-588L.....	53	23-200.....	76	28-164S.....	118
21-465L.....	38, 46	22-589L.....	53	23-201.....	76	28-166S.....	121
21-467L.....	38, 46	22-591L.....	53	23-202.....	76	28-168S.....	119
21-469L.....	46	22-592L.....	53	23-203.....	76	28-169S.....	119
21-524L.....	47	22-593L.....	53	23-204.....	76	28-170S.....	119
21-528L.....	45	22-594L.....	53	23-205.....	76	28-171S.....	119
21-534L.....	45	22-598L.....	53	24-600.....	80	28-172S.....	118
21-545L.....	26, 47	22-599L.....	53	24-602.....	80	28-174S.....	118
21-546L.....	47	22-600L.....	53	24-603.....	80	28-180S.....	121
21-547L.....	29	22-602L.....	53	24-604.....	80	28-185S.....	120
21-561L.....	78	22-603L.....	53	24-605.....	80	28-193S.....	119
21-565L.....	78	22-604L.....	53	24-700.....	80	28-194S.....	119
21-600L.....	78	22-605L.....	53	25-100.....	83	28-200.....	111
21-640L.....	78, 79	22-608L.....	53	25-101.....	83	28-201.....	111
21-643L.....	78	22-609L.....	53	25-102.....	83	28-260S.....	117
21-670.....	26	22-610L.....	53	25-103.....	83	29-101.....	84
22-201.....	70	22-611L.....	53, 78	25-104.....	83	29-108.....	84
22-204.....	70	22-615.....	71	25-112.....	83	29-158.....	82
22-204-S.....	70	22-616.....	67, 70, 71	25-113.....	83	29-160.....	82
22-404.....	70	22-620L.....	53	25-118.....	83	29-162.....	84
22-404-S.....	70	22-621L.....	53	25-120.....	83	29-162P.....	84
22-500.....	71	22-622L.....	53	25-125.....	83	30-107S.....	122
22-501.....	71	22-625L.....	53	25-128.....	83	30-111S.....	122
22-502.....	71	22-626L.....	53	25-129.....	83	30-113S.....	122
22-503.....	71	22-628L.....	53	25-150.....	43	30-117S.....	122
22-504.....	71	22-631L.....	53	25-200.....	82	30-125S.....	122
22-505.....	71	22-632L.....	53	25-200S.....	82	30-129S.....	122

**Index**

30-141.....	104	CS-1818-3-LR-LF.....	102	DX-410.....	17	H-110.....	98
30-141S.....	122	CS-1818-L-LF.....	102	DX-420.....	18	H-111.....	97
30-145.....	104	CS-1818-LR-LF.....	102	DX-421.....	18	H-115.....	97
30-146S.....	122	CS-1818-R-LF.....	102	DX-422.....	18	H-116.....	97
30-147.....	104	CS-1836.....	100	DX-423.....	18	H-121.....	97
30-148.....	104	CS-1860.....	100	DX-424.....	18	H-122.....	97
30-150.....	104	CS-1872.....	100	DX-425.....	18	H-145.....	97
30-151S.....	122	CS-2424-2-LR-LF.....	102	DX-426.....	18	H-160.....	97
30-152.....	104	CS-2424-LR-LF.....	102	DX-430.....	18	H-162.....	97
30-153.....	104	D278.....	86	DX-431.....	18	H-165.....	97
30-160.....	104	D278-7.....	86	DX-432.....	18	HS-1.....	96
30-161S.....	122	D2712.....	86	DX-601.....	17	HS-2L.....	88, 90, 94
30-200.....	84	D2712-7.....	86	DX-602.....	17	HS-2-LF.....	93
30-201.....	84	D2712-10.....	86	DX-625.....	17	HS-2-LS.....	89, 94
30-202.....	84	D2712DP.....	86	DX-708.....	18	HS-2-RS.....	89
30-317.....	83	DX-1XX.....	16	DX-709.....	18	HS-4.....	88
30-318.....	83	DX-3XX.....	17	DX-801.....	17	HS-5.....	89
30-324.....	84	DX-4XX.....	17	DX-802.....	17	HS-7.....	91
30-325.....	84	DX-6XX.....	17	DX-806.....	17	HS-8.....	91
30-330.....	84	DX-8XX.....	17	DX-808.....	17	HS-9L.....	5
30-335.....	84	DX-9XX.....	17	DX-810.....	17	HS-9-LF.....	95
30-502.....	84	DX-100.....	18	DX-812.....	17	HS-9-LS.....	94
30-550.....	84	DX-108.....	15	DX-814.....	17	HS-9-RS.....	94
A1616.....	75	DX-109.....	15	DX-816.....	17	HS-9S-LF.....	95
A1620.....	75	DX-109-X.....	15	DX-818.....	17	HS-10.....	88
A1625.....	75	DX-129.....	16	DX-901.....	17	HS-11.....	90
A2016.....	75	DX-133.....	16	DX-902.....	17	HS-11-LF.....	93
A2020.....	75	DX-137.....	16	DX-906.....	17	HS-12.....	90
A2025.....	75	DX-138.....	16	DX-908.....	17	HS-13.....	90
A2520.....	75	DX-139.....	16	DX-910.....	17	HS-14.....	92
BS-1818.....	103	DX-140.....	16	DX-912.....	17	HS-15.....	92
BS-1818-2.....	103	DX-141.....	16	DX-914.....	17	HS-16.....	
BS-1818-3.....	103	DX-149.....	16	DX-916.....	17	HS-18.....	88
BS-2421.....	103	DX-160.....	16	DX-918.....	17	HS-18-LF.....	93
BS-2421-2.....	103	DX-160-24.....	16	E50.....	110	HS-19.....	96
C50.....	110	DX-161.....	16	E75.....	110	HS-20-LF.....	93
C75.....	110	DX-162.....	16	E100.....	110	HS-21.....	94
C100.....	110	DX-165.....	16	E125.....	110	HS-22.....	88
C125.....	110	DX-166.....	16	FG-L2.....	98	HS-26L.....	89
C5024K.....	109	DX-171.....	16	FG-LR2.....	98	HS-26-LF.....	89
C5036K.....	109	DX-179.....	16	FG-R2.....	98	HS-30L.....	94
C5048K.....	109	DX-201.....	16	G50.....	110	HS-30-LF.....	95
C5060K.....	109	DX-202.....	15	G75.....	110	HS-31.....	94
C5072K.....	109	DX-208.....	16	G100.....	110	HS-32.....	94
C7524K.....	109	DX-301.....	17	G125.....	110	HS-33.....	91
C7536K.....	109	DX-302.....	17	G1616.....	75	HS-34.....	89
C7548K.....	109	DX-306.....	17	G1620.....	75	HS-35.....	95
C7560K.....	109	DX-308.....	17	G1625.....	75	HS-36.....	89
C7572K.....	109	DX-310.....	17	G2016.....	75	HS-37.....	94
C10024K.....	109	DX-312.....	17	G2020.....	75	HS-39.....	92
C10036K.....	109	DX-314.....	17	G2025.....	75	HS-40.....	92
C10048K.....	109	DX-316.....	17	G2520.....	75	HS-41.....	92
C10060K.....	109	DX-322.....	16	GHR-7550.....	112	HS-42.....	92
C10072K.....	109	DX-325.....	17	H-100.....	98	HS-43.....	88
C12524K.....	109	DX-400.....	17	H-101.....	59, 97	HS-50.....	96
C12536K.....	109	DX-401.....	17	H-105.....	97	HS-51.....	96
C12548K.....	109	DX-402.....	17	H-108-1.....	98	HS-53.....	96
C12560K.....	109	DX-406.....	17	H-108-2.....	98	HS-56.....	91
C12572K.....	109	DX-408.....	17	H-108-9.....	98	HS-58.....	91

HS-61 .....	96	M5072K5 .....	108	M10060 .....	109	QD50 .....	110
HS-62 .....	96	M5072K9 .....	106	M10060K .....	106	QD75 .....	110
HS-64 .....	95	M5072K10 .....	107	M10060K2 .....	108	QD100 .....	110
HS-65 .....	95	M5072K12 .....	107	M10060K5 .....	108	QD125 .....	110
HS-67 .....	90	M7524 .....	109	M10060K9 .....	106	R24 .....	110
HS-68 .....	90	M7524K .....	106	M10060K10 .....	107	R36 .....	110
HS-69 .....	90	M7524K2 .....	108	M10060K12 .....	107	R48 .....	110
HS-70 .....	90	M7524K5 .....	108	M10072 .....	109	R60 .....	110
HS-74 .....	104	M7524K9 .....	106	M10072K .....	106	R72 .....	110
HS-1220 .....	99	M7524K10 .....	107	M10072K2 .....	108	RB7550 .....	110
HS-1225 .....	99	M7524K12 .....	107	M10072K5 .....	108	RG50 .....	111
HS-1317 .....	99	M7536 .....	109	M10072K9 .....	106	RG75 .....	111
HS-1419 .....	99	M7536K .....	106	M10072K10 .....	107	RL50 .....	111
HS-1425 .....	99	M7536K2 .....	108	M10072K12 .....	107	RL75 .....	111
HS-1515 .....	99	M7536K5 .....	108	M12524 .....	109	RS1616 .....	75
HS-2017 .....	99	M7536K9 .....	106	M12524K .....	106	RS1620 .....	75
HS-2619 .....	100	M7536K10 .....	107	M12524K2 .....	108	RS1625 .....	75
HS-2619-LF .....	100	M7536K12 .....	107	M12524K5 .....	108	RS2020 .....	75
HS-3819 .....	100	M7548 .....	109	M12524K9 .....	106	RS2025 .....	75
HS-3819-LF .....	100	M7548K .....	106	M12524K10 .....	107	RS2520 .....	75
HS-MTH25 .....	97	M7548K2 .....	108	M12524K12 .....	107	S-5 .....	89
KR-CPN6 .....	72	M7548K5 .....	108	M12536 .....	109	S25-123 .....	82
KR-FC .....	76	M7548K9 .....	106	M12536K .....	106	S25-124 .....	82
KR-HS1-KIT .....	76	M7548K10 .....	107	M12536K2 .....	108	S25-126 .....	82
KR-HS2-KIT .....	76	M7548K12 .....	107	M12536K5 .....	108	S25-127 .....	82
KR-HS3-KIT .....	76	M7560 .....	109	M12536K9 .....	106	S25-140 .....	82
KR-HSA .....	76	M7560K .....	106	M12536K10 .....	107	S1616 .....	75
KR-SF .....	76	M7560K2 .....	108	M12536K12 .....	107	S1620 .....	75
M5024 .....	109	M7560K5 .....	108	M12548 .....	109	S1625 .....	75
M5024K .....	106	M7560K9 .....	106	M12548K .....	106	S2016 .....	75
M5024K2 .....	108	M7560K10 .....	107	M12548K2 .....	108	S2020 .....	75
M5024K5 .....	108	M7560K12 .....	107	M12548K5 .....	108	S2025 .....	75
M5024K9 .....	106	M7572 .....	109	M12548K9 .....	106	S2520 .....	75
M5024K10 .....	107	M7572K .....	106	M12548K10 .....	107	S5036 .....	112
M5024K12 .....	107	M7572K2 .....	108	M12548K12 .....	107	S5036B .....	112
M5036 .....	109	M7572K5 .....	108	M12560 .....	109	S5036K .....	112
M5036K .....	106	M7572K9 .....	106	M12560K .....	106	S5048 .....	112
M5036K2 .....	108	M7572K10 .....	107	M12560K2 .....	108	S5048B .....	112
M5036K5 .....	108	M7572K12 .....	107	M12560K5 .....	108	S5048K .....	112
M5036K9 .....	106	M10024 .....	109	M12560K9 .....	106	S7536 .....	112
M5036K10 .....	107	M10024K .....	106	M12560K10 .....	107	S7536B .....	112
M5036K12 .....	107	M10024K2 .....	108	M12560K12 .....	107	S7536K .....	112
M5048 .....	109	M10024K5 .....	108	M12572 .....	109	S7548 .....	112
M5048K .....	106	M10024K9 .....	106	M12572K .....	106	S7548B .....	112
M5048K2 .....	108	M10024K10 .....	107	M12572K2 .....	108	S7548K .....	112
M5048K5 .....	108	M10024K12 .....	107	M12572K5 .....	108	SC278 .....	86
M5048K9 .....	106	M10036 .....	109	M12572K9 .....	106	SC2712 .....	86
M5048K10 .....	107	M10036K .....	106	M12572K10 .....	107	SG-L2 .....	98
M5048K12 .....	107	M10036K5 .....	108	M12572K12 .....	107	SG-LR2 .....	98
M5060 .....	109	M10036K9 .....	106	MH-5 .....	37, 65	SG-R2 .....	98
M5060K .....	106	M10036K10 .....	107	MH-24 .....	37, 65	SW50 .....	110
M5060K2 .....	108	M10036K12 .....	107	MS-1818 .....	37, 65	SW75 .....	110
M5060K5 .....	108	M10048 .....	109	MS-2424 .....	37, 65	SW100 .....	110
M5060K9 .....	106	M10048K .....	106	P25-123 .....	82	SW125 .....	110
M5060K10 .....	107	M10048K2 .....	108	P25-124 .....	82	WB-1712 .....	98
M5060K12 .....	107	M10048K5 .....	108	P25-126 .....	82	WB-1715 .....	98
M5072 .....	109	M10048K9 .....	106	P25-127 .....	82	WS-1 .....	85
M5072K .....	106	M10048K10 .....	107	P25-140 .....	82	WS-2 .....	85
M5072K2 .....	108	M10048K12 .....	107	P30-318 .....	83		

**1. PRICES** All previous prices are currently withdrawn.

**2. ACCEPTANCE**

If the terms and conditions herein (the "Terms and Conditions") differ in any way from the terms and conditions of Buyer's order, or if these Terms and Conditions are construed as an acceptance or confirmation acting as an acceptance, then the Seller's acceptance is EXPRESSLY CONDITIONED ON BUYER'S ACCEPTANCE OF AND AGREEMENT TO ANY TERMS AND CONDITIONS SET FORTH HEREIN, THAT ARE DIFFERENT FROM OR ADDITIONAL TO THOSE IN BUYER'S ORDER. In addition, this writing shall constitute notice of objection to any terms and conditions in Buyer's order that differ from, or are in addition to, the Terms and Conditions herein. If the Terms and Conditions herein are construed as an offer, acceptance of such offer is EXPRESSLY LIMITED TO THE TERMS AND CONDITIONS SET FORTH HEREIN. In any event, Buyer's acceptance of goods from Seller shall constitute Buyer's acceptance of and agreement to the Terms and Conditions. These Terms and Conditions shall not be supplemented or modified except as agreed to in writing and signed by Seller.

**3. EXPRESS WARRANTIES, CONDITIONS, & EXCLUSIONS**

**A. Warranty**

Subject to the conditions and exclusions set forth below, Seller warrants to Buyer (i) that Seller holds and will pass marketable title to the goods sold hereunder; (ii) that the goods sold hereunder will be free from defects in materials and workmanship (subject to tolerances and variances permitted by the trade hereunder) for the applicable warranty period set forth in Seller's standard warranty and limitation of liability (the "Standard Warranty"), provided, however, that the glasswasher shall have a one (1) year labor warranty and refrigeration parts shall have a one (1) year labor and parts warranty.

**B. Conditions and Exclusions**

The express warranty set forth above (the "Warranty") is subject to the following conditions and exclusions: (i) Buyer shall not assign its rights under the Warranty and any attempt by Buyer to assign such rights shall render the Warranty, but not any disclaimers or limitations, void, and the goods shall be sold AS IS; (ii) all goods shall be carefully installed by persons who are trained and certified professionals with respect to such installations, and be installed, used, repaired and maintained by Buyer in accordance with all applicable local laws, codes and regulations; (iii) goods covered by the Warranty shall be warranted in connection with original installation only; (iv) Seller shall not be liable by Buyer's failure to provide a continuously suitable environment, including, without limitation, neglect or misuse, failure or sudden surge of electrical power, improper air conditioning or humidity control or any other cause other than ordinary use; (v) Seller shall not be liable for any damage arising from the use of any goods in any application other than the commercial and industrial applications for which they are intended; (vi) Seller shall not be liable for damage caused by fire, flood, earthquake, water, severe wind, lightning or other natural disaster, strike, inability to obtain materials or utilities, war, terrorism, civil disturbance or any other cause beyond Seller's reasonable control; and (vii) Seller shall not be liable for any statements made about the goods by salesmen, dealers, distributors or agents, unless such statements are in a written document signed by an officer of Seller.

**4. DISCLAIMER OF IMPLIED WARRANTIES**

Seller makes no other warranties or conditions, express or implied, included, without limitation, the implied warranties or conditions of merchantability and fitness for a particular purpose. Specifically, except as provided herein and in the standard, seller undertakes no responsibility for the quality or the goods or that the goods will be fit for any particular purpose for which purchaser may be buying the goods. Any implied warranty is limited in duration to the warranty period. No oral or written information, or advice given by the company, its agents or employees, shall create a warranty or in any way increase the scope of this limited warranty.

**5. LIMITATIONS OF LIABILITY**

Buyer acknowledges that the following limitations of Seller's liability are fair and reasonable and shall apply to any act or omission hereunder, as well as to any breach of contract to which these Terms and conditions form a part.

**A. Disclaimer of Damages**

In no event shall seller (including its subsidiaries, affiliates, officers, directors, employees, or agents) be liable for any special, consequential, incidental or exemplary damages arising out of or in any way connected with the goods or otherwise, including, without limitation, to damages for lost profits, cost of substitute or replacement goods, down time, lost data, injury to property or any damages or sums paid by buyer to third parties, even if seller has been advised of the possibility of such damages. The foregoing limitation of liability shall apply whether any claim is based upon principles of contract, tort or statutory duty, principles of indemnity or contribution, or otherwise.

In no event shall seller be liable to buyer or any other party for loss, damage, or injury of any kind of nature arising out of or in connection with this warranty in excess of the purchase price of the goods actually delivered to and paid for by the buyer. The buyer's remedy in any dispute under this warranty shall be ultimately limited to the purchase price of the goods to the extent the purchase price has been paid.

**B. Notice and Time of Claims**

Buyer agrees (i) to check and inspect all products against shipping papers and for damage or shortage upon receipt of goods at destination; (ii) that any claim for loss, damage in transit, or other cause visible upon inspection shall be made within

five (5) days of receipt; (iii) that the parties expressly waive the statute of limitations and that any legal proceeding for any cause of action arising from or relating to this contract shall be waived unless commenced within two (2) years after the accrual of such cause of action.

**6. ATTORNEY'S FEES**

Buyer agrees to reimburse Seller for any costs and expenses, including reasonable attorney's fees, incurred by Seller as a result of any breach or default by Buyer of its obligations hereunder.

**7. TERMS**

Net 30 Days for those firms furnishing satisfactory credit reference. Interest on accounts overdue more than thirty (30) days will be charged at a rate of 2% per month or the highest rate permitted by law, whichever is lower (the "Overdue Rate").

**8. QUOTATIONS**

Unless otherwise stated, quotations are for 90 day acceptance.

**9. MINIMUM ORDER** \$35.00 Net.

**10. SHIPPING TERMS**

The method of shipment and carrier shall be determined by Seller unless Buyer shall have specified a method of shipment and carrier (more) than ten (10) days prior to scheduled shipment. Title and all risks of loss or damage shall pass to Buyer upon delivery to carrier. We are not responsible for any delays in delivery which are beyond our control such as fires, strikes, delays in transportation or any similar contingencies. We reserve the right to ship via carriers that in our opinion are the most efficient. Where possible, customer's routing will be followed. All orders shipped prepaid will have a nominal administration charge per freight bill.

**11. RETURNS**

Custom and modified equipment, glass washers, beer systems and underbar workstations without cold plates are not returnable. Return authorization for all other items must be requested within 90 days and receive subsequent approval. All returns must also be accompanied with photos of the product/equipment in current state and the product/equipment must also be packed in its original packaging with the protective film applied by Krowne still in place. No returns are to be made to Krowne without first obtaining a return authorization and returns will not be accepted or credited without such prior authorization. All approved returns are subject to a 25-50% restocking charge based on the specific product plus the cost of transportation both ways.

**12. SHORTAGE**

Krowne must be notified in writing within 5 days of receipt of shipment.

**13. TAXES**

Buyer will pay when due any and all taxes, tariffs, fees and assessments or any other similar charges imposed upon this contract, the goods covered hereby or the delivery, installation, use or resale thereof. If Buyer fails to pay any such amount when due, Seller may elect to pay it and Buyer shall promptly reimburse Seller for such payment, together with interest at the Overdue Rate.

**14. GOVERNING LAW**

This agreement, and all matters arising hereunder, shall be interpreted and resolved in accordance with the laws of the State of New Jersey, without giving effect to conflict of law of principles and excluding the United Nations Convention on the International Sale of Goods. Buyer and Seller submit to the personal jurisdiction of the state and federal courts of the State of New Jersey and agree that such courts will have jurisdiction over them in connection with any matter relating to or arising under this agreement. Service of process may be made by registered or certified mail, return receipt requested, to the last known address of the party being served. Process may also be served by any other legal means and Seller may bring an action with respect to any such matter in another jurisdiction.

**15. PRINTS AND DRAWINGS**

All prints and drawings submitted with orders will be accepted as correct sizes and any errors arising from the same will be the responsibility of the Buyer. There are no returns or cancellations for equipment built to your specifications.

**16. PRODUCT IMPROVEMENT**

Due to our commitment to continued product improvement, specifications are subject to change without notice.

**17. MISCELLANEOUS**

If any of the foregoing Terms and Conditions is declared illegal or unenforceable by a court of competent jurisdiction, it will be ineffective only to the extent of such illegality or unenforceability, without affecting the validity and enforceability, without affecting the validity and enforceability of the other Terms and Conditions. The headings used herein are inserted for convenience of reference of these Terms and Conditions. All prices are in U.S. Dollars.

California's Proposition 65 requires that consumers in the state of California receive the following notice:

 Warning: This product contains chemicals including lead and lead compounds known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

\*Krowne products are not manufactured or authorized by any other manufacturer. Registered Trade Name or Mark of the original manufacturer of the product which this part fits, is not owned, associated or to be confused with our company.

This Standard Warranty and Limitation of Liability (the "Warranty") sets forth the warranty provided by Krowne Metal Corporation (hereinafter "Krowne") with respect to the product purchased by Purchaser (the "Equipment"). By accepting delivery of the Equipment, Purchaser agrees to be bound by and accept these terms and conditions. All defined terms within the Warranty shall have the same meaning and definition as provided elsewhere in the Warranty. Equipment covered by the Warranty shall only be warranted in connection with its original installation only. KROWNE WILL ONLY BE OBLIGATED TO HONOR THE WARRANTY SET FORTH IN THESE TERMS AND CONDITIONS UPON RECEIPT OF FULL PAYMENT FOR THE EQUIPMENT.

**1. WARRANTY COVERAGE**

- A.** Subject to the conditions and exclusions set forth below, including, with respect to Diamond Series Plumbing, Purchaser's completion and delivery to Krowne of a warranty registration card or online Warranty registration, Krowne warrants to Purchaser that (i) Krowne holds and will pass marketable title to the goods sold hereunder, and (ii) the goods sold hereunder will be free from defects in materials and workmanship (subject to tolerances and variances permitted by the trade hereunder) for the applicable Warranty Period, as listed above (the "Warranty Period").
- B.** Krowne's obligation under this Warranty is limited to, at Krowne's option, replacing or repairing, any Equipment or part thereof that is found by Krowne not to conform to the Equipment's specifications. Krowne shall have a reasonable period of time to make such replacements or repairs and all labor associated therewith shall be performed during Krowne's regular working hours.
- C.** Krowne shall pay transportation charges for the return of any defective portion of the Equipment. If returned Equipment is repaired or replaced under the terms of this Warranty, Krowne will prepay transportation charges back to Purchaser; otherwise, Purchaser shall pay transportation charges to return the Equipment back to the Purchaser. All returns must be pre-approved by Krowne before shipment. Krowne shall not be obligated to pay freight for any unapproved return.
- D.** Any replacement parts or Equipment will be new, comparable in function and performance to the original part of Equipment, and warranted for the remainder of the Warranty Period. Purchasing additional parts or Equipment from Krowne does not extend this Warranty Period.
- E.** With regard to the Equipment, a defect shall refer to a variance from the design specifications that prohibit the Equipment from operating for its intended use. The Warranty provided by Krowne does not impose any duty or liability upon Krowne for degradation that occurs in the normal course over time, or due to improper installation of the Equipment by Purchaser or their representative.

THIS LIMITED WARRANTY IS THE ONLY WARRANTY APPLICABLE TO THE EQUIPMENT AND REPLACES ALL OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SPECIFICALLY, EXCEPT AS PROVIDED HEREIN, KROWNE UNDERTAKES NO RESPONSIBILITY FOR THE QUALITY OF THE EQUIPMENT OR THAT THE EQUIPMENT WILL BE FIT FOR ANY PARTICULAR PURPOSE FOR WHICH PURCHASER MAY BE BUYING THE EQUIPMENT. ANY IMPLIED WARRANTY IS LIMITED IN DURATION TO THE WARRANTY PERIOD. NO ORAL OR WRITTEN INFORMATION, OR ADVICE GIVEN BY THE COMPANY, ITS AGENTS OR EMPLOYEES, SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS LIMITED WARRANTY.

**2. EXCLUSION FROM WARRANTY COVERAGE**

- The Krowne Warranty does not impose any duty or liability upon Krowne for:
- A.** Any damage occurring, at any time, during shipping of Equipment unless otherwise provided for in the Agreement. When returning Equipment to Krowne for repair or replacement, Purchaser assumes all risk of loss or damage, and agrees to use any shipping containers that might be provided by Krowne and to ship the Equipment in the manner prescribed by Krowne;
  - B.** Damage caused by the failure to provide a continuously suitable environment, but not limited to: (i) neglect or misuse, (ii) a failure or sudden surge of electrical power, (iii) improper air conditioning or humidity control, or (iv) any other cause other than ordinary use;
  - C.** Damage caused by the unauthorized installation, adjustment, repair or service of the Equipment by anyone other than Krowne or Krowne's expressly authorized designee;
  - D.** Damage caused by fire, flood, earthquake, water, severe wind, lightning or other natural disaster, strike, inability to obtain materials or utilities, war, terrorism, civil disturbance or any other cause beyond Krowne's reasonable control;
  - E.** Failure to adjust, repair or replace any item of Equipment if it would be impractical for Krowne personnel to do so because of connection of the Equipment by mechanical or electrical means to another device not supplied by Krowne, or the existence of general environmental conditions at the site that pose a danger to Krowne personnel;
  - F.** Any statements made about the product by salesmen, dealers, distributors or agents, unless such statements are in a written document signed by an officer of Krowne. Such statements as are not included in a signed writing do not constitute warranties, shall not be relied upon by Purchaser and are not part of the contract of sale;
  - G.** Any damage arising from the use of Krowne products in any application other than the commercial and industrial applications for which they are intended, unless, upon request, such use is specifically approved in writing by Krowne; or
  - H.** Any performance of preventive maintenance

**3. PURCHASER'S INSPECTION UPON RECEIPT OF EQUIPMENT**

All Equipment shall be carefully inspected by Purchaser upon receipt, be installed by persons who are trained and certified professionals with respect to such installations, and be installed, used, repaired and maintained by Purchaser in accordance with all applicable local laws, codes and regulations.

**4. LIFETIME WARRANTY PRODUCTS**

The Lifetime Warranty for the Krowne Metal Corporation Gas Hose ("Gas Hose") is valid solely for the lifetime and duration of the Equipment to which the Gas Hose is connected for operation (the "Lifetime Warranty"). For the avoidance of doubt, the Lifetime Warranty shall be deemed expired on the same Warranty Period expiration date applicable to the Equipment to which the Gas Hose is connected.

**5. LIMITATION OF LIABILITY**

In no event shall Krowne (including its subsidiaries, affiliates, officers, directors, employees, or agents) be liable for any special, consequential, incidental or exemplary damages arising out of or in any way connected with the Equipment or otherwise, including, without limitation, to damages for lost profits, cost of substitute or replacement Equipment, down time, lost data, injury to property or any damages or sums paid by Purchaser to third parties, even if Krowne has been advised of the possibility of such damages. The foregoing limitation of liability shall apply whether any claim is based upon principles of contract, tort or statutory duty, principles of indemnity or contribution, or otherwise.

In no event shall Krowne be liable to Purchaser or any other party for loss, damage, or injury of any kind or nature arising out of or in connection with this Warranty in excess of the purchase price of the Equipment actually delivered to and paid for by the Purchaser. The Purchaser's remedy in any dispute under this Warranty shall be ultimately limited to the Purchase Price of the Equipment to the extent the Purchase Price has been paid.

**6. ASSIGNMENT OF RIGHTS**

The Warranty contained herein extends only to the original Purchaser of the Equipment and no attempt to extend the Warranty to any subsequent user or transferee of the Equipment shall be valid or enforceable without the express written consent of Krowne. Any attempt by Purchaser to assign this Warranty shall render the Warranty, but not any disclaimers or limitations, void, and the goods shall be sold AS IS.

**7. COMPONENT PASS THROUGH WARRANTY**

Except as provided herein, although Krowne does not warrant components, it will pass through any warranties received by third-party component suppliers, to the extent permitted by the terms and conditions of such warranties.

**8. NOTICE AND TIME OF CLAIMS**

Purchaser shall make any claim for loss or damage to Equipment sustained during shipment within five (5) days of receipt of such Equipment.

**9. DISPUTE RESOLUTION**

Any dispute between the parties will be resolved exclusively and finally by arbitration and conducted under the assigned arbitrator rules, except as otherwise provided below. The arbitration will be conducted before a single arbitrator. The arbitration shall be held in Essex County, New Jersey. Any decision rendered in such arbitration proceedings will be final and binding on each of the parties, and judgment may be entered thereon in any court of competent jurisdiction. This arbitration agreement is made pursuant to a transaction involving interstate commerce, and shall be governed by the Federal Arbitration Act.

**10. GOVERNING LAW**

Both parties consent to the application of the laws of the State of New Jersey to govern, interpret, and enforce all of Purchaser and Krowne's rights, duties, and obligations arising from, or relating in any manner to, the subject matter of this Warranty, without regard to conflict of law principles. In no event shall the rights and obligations of the parties under this warranty shall not be governed by the provisions of the United Nations Convention on Contracts for the International Sales of Goods of 1980.

Product Description	Warranty Period
Diamond Series Plumbing	Lifetime
Royal Series Plumbing	3 years
Silver Series Plumbing	1 year
Hand Sinks	1 year
Royal Series Underbar	1 year
Silver Series Underbar	1 year
Gas Hoses	Lifetime
KR-HS1-KIT	1 year
KR-HS2-KIT	1 year
KR-HS3-KIT	1 year
KR-HAS-KIT	1 year
KR-FC	30 day from installation
KR-SF	30 day from installation

Parts, labor and compressor warranty applies to all commercial applications installed by a licensed installer. For residential applications, we provide a one year parts warranty and five year compressor warranty, however labor is not covered in residential applications.





