



# Base Models

WORKTOPS, UNDERCOUNTERS & SANDWICH UNITS



**Continental**<sup>®</sup>  
Refrigerator

INNOVATIVE DESIGNS FOR YOUR FOODSERVICE NEEDS

# Base Models

---

## Worktops, Undercounters & Sandwich Units

For high volume situations where flexibility and storage of pans is needed, our Base Models provide solutions that work and last. All of our Base Models come equipped with heavy gauge #300 Series stainless steel tops, stainless steel front, stainless steel end panels and aluminum interior. The condensing unit can be placed on the left or right of the model to keep away from hot equipment that may be nearby.

## More Refrigerated Space

All our units that have side-mounted refrigeration feature a refrigerated storage compartment above the compressor. This section, unique to Continental Refrigerator, increases overall refrigerated storage capacity.

## Performance & Reliability

Performance-run tested for a minimum of 12 hours providing a highly sophisticated temperature analysis recording, exclusive to each cabinet




# FLEXIBILITY

## Modifications Made Easy.

At Continental Refrigerator, we know the foodservice industry is an ever-changing environment. We are reminded of this every day through feedback from our customers, both directly and through our network of representatives. In fact, customer feedback has often led to our custom engineering modifications becoming standard product features.

For this reason, we pride ourselves in delivering feature-rich refrigeration equipment solutions designed specifically for the commercial foodservice market. Whether it's kitchen ambient, food safety, limited space or storage challenges, our products are packed with flexible options that provide **real** operator benefits out of the box. This flexibility, a key differentiator of our products, enables our customers to modify base product features strategic to the way they operate their kitchen or bar environment.

**Shown: RA93N30M**

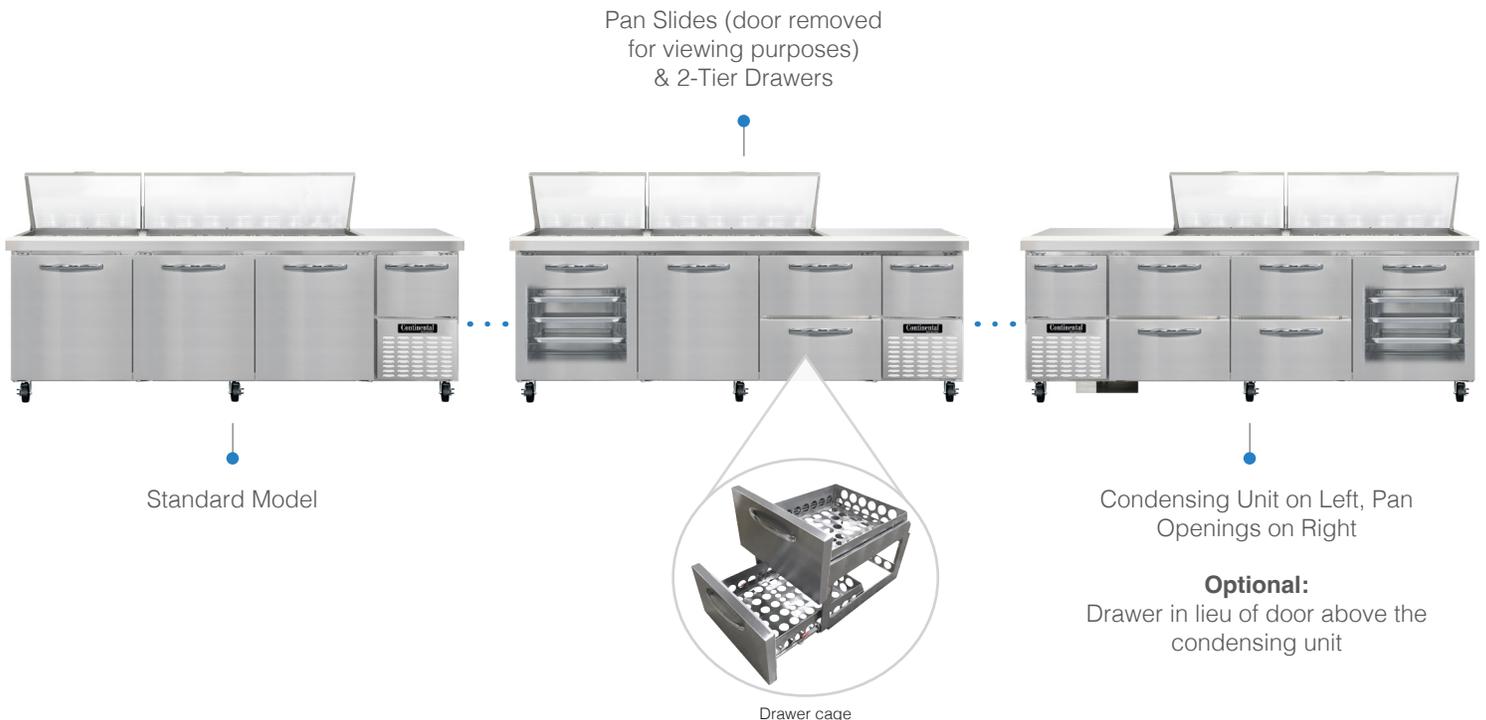

*Consult factory for other modifications*

[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Base Models offer a host of options that can help you modify these models to your operation. Choose from either **Worktop**, **Undercounter** or **Sandwich Unit** models. Popular options include:

#### **Condensing Unit Placement**

Condensing unit can be placed left or right of the models to keep away from other hot equipment

#### **2-Tier Drawers**

With easy in-the-field conversion from “door to drawer” or “drawer to door”

#### **Refrigerated Section Above Condensing Unit**

Door is standard, drawer is an option

#### **Overshelves**

16-gauge stainless steel, single or double for added storage (not available on Undercounters)

#### **Pan Configurations**

Modify pan openings on our Base Model Sandwich Units to meet the needs of your product flow

**Other Lids:**  
Vision panel lids  
(flat or hooded)

Flat Lids & Front Breathing



Vision Panel Lids  
& Composite Cutting Board

16-Gauge Overshelves  
(single or double)  
& Adjustable Legs



**Cutting Boards on Sandwich Units Available:**

Standard Top: 12" deep  
Mighty Top: 10" deep

Call us toll free at (800) 523-7138

# Worktops Standard Features & Specifications

## Specifications

### Base Worktop Refrigerator & Freezer (0°F) Models

SIZE	WITH DOOR(S)	WITH DRAWERS	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	SHIP WEIGHT
43"	RA43N	RA43N-D	43 x 36 5/16 x 35	2610	1/4+	335
	FA43N	FA43N-D	43 x 36 5/16 x 35	1340	1/3	340
60"	RA60N	RA60N-D	60 x 36 5/16 x 35	3100	1/4+	405
	FA60N	FA60N-D	60 x 36 5/16 x 35	2180	3/4	410
68"	RA68N	RA68N-D	68 x 36 5/16 x 35	4220	1/4+	475
	FA68N	FA68N-D	68 x 36 5/16 x 35	2310	3/4	490
93"	RA93N	RA93N-D	93 x 36 5/16 x 35	5260	1/4+	585
118"	RA118N	RA118N-D	118 x 36 5/16 x 35	5600	1/4+	705

### Base Worktop Refrigerator & Freezer (0°F) Models w/ 5 1/2" Backsplash

SIZE	WITH DOOR(S)	WITH DRAWERS	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	SHIP WEIGHT
43"	RA43NBS	RA43NBS-D	43 x 36 5/16 x 40 1/2	2610	1/4+	345
	FA43NBS	FA43NBS-D	43 x 36 5/16 x 40 1/2	1340	1/3	350
60"	RA60NBS	RA60NBS-D	60 x 36 5/16 x 40 1/2	3100	1/4+	415
	FA60NBS	FA60NBS-D	60 x 36 5/16 x 40 1/2	2180	3/4	420
68"	RA68NBS	RA68NBS-D	68 x 36 5/16 x 40 1/2	4220	1/4+	490
	FA68NBS	FA68NBS-D	68 x 36 5/16 x 40 1/2	2310	3/4	505
93"	RA93NBS	RA93NBS-D	93 x 36 5/16 x 40 1/2	5260	1/4+	600
118"	RA118NBS	RA118NBS-D	118 x 36 5/16 x 40 1/2	5600	1/4+	720

\*BTU/HR Rating @ +25°F, 90°F ambient (refrigerators)

\*BTU/HR Rating @ -15°F, 90°F ambient (freezers)

10 ft. cord and plug attached (115-60-1 volts)

## Drawer Configurations

TWO TIER DRAWERS	DRAWER OVER COMPRESSOR
(2) 12 x 20 x 6 pans per drawer	(1) 12 x 20 x 6 pan

**Note:** Drawers on 60" models are available over compressor & large section only

## Standard Features

Performance-rated refrigeration system

**Natural, Environmentally safe, high-efficiency R-290 refrigerant**

2" Non-CFC polyurethane foam insulation

**Smooth, polished chrome door/drawer handles**

Spring loaded, self closing doors

Magnetic snap-in Santoprene™ door gaskets

Heavy duty, epoxy-coated steel shelves

Non-corrosive, plasticized fin evaporator coil

**Automatic, hot gas condensate evaporator**

Automatic, energy-saving, non electric condensate evaporator (freezers)

Automatic electric defrost (freezers)

Easily serviceable, slide-out condensing unit

Electronic controller w/ knob control

Expansion valve system

Refrigerated section w/ door above the condensing unit

**Reversing condenser fan** (43" models only)

Electronic control, off-cycle defrost (refrigerators)

Field rehingeable doors

5" casters

## Undercounters Standard Features & Specifications

### Standard Features

Performance-rated refrigeration system

**Natural, Environmentally safe, high-efficiency R-290 refrigerant**

2" Non-CFC polyurethane foam insulation

**Smooth, polished chrome door/drawer handles**

Spring loaded, self closing doors

Magnetic snap-in Santoprene™ door gaskets

Heavy duty, epoxy-coated steel shelves

Non-corrosive, plasticized fin evaporator coil

**Automatic, hot gas condensate evaporator**

Automatic, energy-saving, non electric condensate evaporator (freezers)

Easily serviceable, slide-out condensing unit

Electronic controller w/ knob control

Expansion valve for quick recovery

Refrigerated section w/ door above the condensing unit

Electronic control, off-cycle defrost (refrigerators)

**Reversing condenser fan** (43" models only)

**Front breathing air divider** (field installed)

Field rehingeable doors

**1 3/8" diameter plate casters mounted on heavy-duty support plates**

(field installed, cannot be replaced or changed)

### Specifications

#### Base Undercounter Refrigerator & Freezer (0°F) Models

SIZE	WITH DOOR(S)	WITH DRAWERS	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	SHIP WEIGHT
43"	RA43N-U	RA43N-U-D	43 3/16 x 36 5/16 x 31 3/4	2610	1/4+	335
	FA43N-U	FA43N-U-D	43 3/16 x 36 5/16 x 31 3/4	1340	1/3	340
60"	RA60N-U	RA60N-U-D	60 3/16 x 36 5/16 x 31 3/4	3100	1/4+	405
	FA60N-U	FA60N-U-D	60 3/16 x 36 5/16 x 31 3/4	2180	3/4	410
68"	RA68N-U	RA68N-U-D	68 3/16 x 36 5/16 x 31 3/4	4220	1/4+	475
	FA68N-U	FA68N-U-D	68 3/16 x 36 5/16 x 31 3/4	2310	3/4	490
93"	RA93N-U	RA93N-U-D	93 3/16 x 36 5/16 x 31 3/4	5260	1/4+	585
118"	RA118N-U	RA118N-U-D	118 3/16 x 36 5/16 x 31 3/4	5600	1/2	705

\*BTU/HR Rating @ +25°F, 90°F ambient (refrigerators)

\*BTU/HR Rating @ -15°F, 90°F ambient (freezers)

10 ft. cord and plug attached (115-60-1 volts)

#### Drawer Configurations

TWO TIER DRAWERS	DRAWER OVER COMPRESSOR
(2) 12 x 20 x 6 pans per drawer	(1) 12 x 20 x 6 pan

**Note:** Drawers on 60" models are available over compressor & large section only

# Sandwich Units Standard Features & Specifications

## Specifications

### Base Sandwich Units - Standard Top Models

SIZE	WITH DOOR(S)	WITH DRAWERS	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	SHIP WEIGHT
43"	RA43N6	RA43N6-D	43 x 37 x 42	2000	1/4	350
60"	RA60N8	RA60N8-D	60 x 37 x 42	2600	1/3	420
	RA60N10	RA60N10-D	60 x 37 x 42	2600	1/3	420
	RA60N12	RA60N12-D	60 x 37 x 42	2600	1/3	420
68"	RA68N8	RA68N8-D	68 x 37 x 42	2600	1/3	490
	RA68N10	RA68N10-D	68 x 37 x 42	2600	1/3	490
	RA68N12	RA68N12-D	68 x 37 x 42	2600	1/3	490
93"	RA93N8	RA93N8-D	93 x 37 x 42	2600	1/3	605
	RA93N10	RA93N10-D	93 x 37 x 42	2600	1/3	605
	RA93N12	RA93N12-D	93 x 37 x 42	2600	13	605
	RA93N18	RA93N18-D	93 x 37 x 42	2600	1/3	605

### Base Sandwich Units - Mighty Top Models

SIZE	WITH DOOR(S)	WITH DRAWERS	EXTERIOR DIMENSIONS INCHES W x D x H	CAPACITY BTU/HR*	H.P.	SHIP WEIGHT
43"	RA43N9M	RA43N9M-D	43 x 37 x 42	2000	1/4	350
60"	RA60N12M	RA60N12M-D	60 x 37 x 42	2600	1/3	420
	RA60N18M	RA60N18M-D	60 x 37 x 42	2600	1/3	420
68"	RA68N12M	RA68N12M-D	68 x 37 x 42	2600	1/3	490
	RA68N18M	RA68N18M-D	68 x 37 x 42	2600	1/3	490
93"	RA93N12M	RA93N12M-D	93 x 37 x 42	2600	1/3	605
	RA93N18M	RA93N18M-D	93 x 37 x 42	2600	1/3	605
	RA93N24M	RA93N24M-D	93 x 37 x 42	2600	1/3	605
	RA93N27M	RA93N27M-D	93 x 37 x 42	2600	1/3	605
	RA93N30M	RA93N30M-D	93 x 37 x 42	2600	1/3	605

\*BTU/HR Rating @ +25°F, 90°F ambient  
10 ft. cord and plug attached (115-60-1 volts)

## Drawer Configurations

TWO TIER DRAWERS	DRAWER OVER COMPRESSOR
(1) 12 x 20 x 6 pan & (3) 1/6 pans per drawer (top) (2) 12 x 20 x 6 pans per drawer (bottom)	(1) 12 x 20 x 6 pan

**Note:** Drawers on 60" models are available over compressor & large section only

## Standard Features

Performance-rated refrigeration system

**Natural, Environmentally safe, high-efficiency R-290 refrigerant**

2" Non-CFC polyurethane foam insulation

**Smooth, polished chrome door/drawer handles**

Spring loaded, self closing doors

Magnetic snap-in Santoprene™ door gaskets

Removable interior tub below pans

Heavy duty, epoxy-coated steel shelves

**Automatic, hot gas condensate evaporator**

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

Full length nylon cutting board  
- 12" deep - Standard Tops  
- 10" deep - Mighty Tops

Electronic controller w/ knob control

Expansion valve system

Refrigerated section w/ door above the condensing unit

**Reversing condenser fan** (43" models only)

1/6 size non-recessed pans, 4" deep


Insulated lids

Field rehingeable doors


5" casters

## Pan Top Configurations for Sandwich Units

### Standard Tops

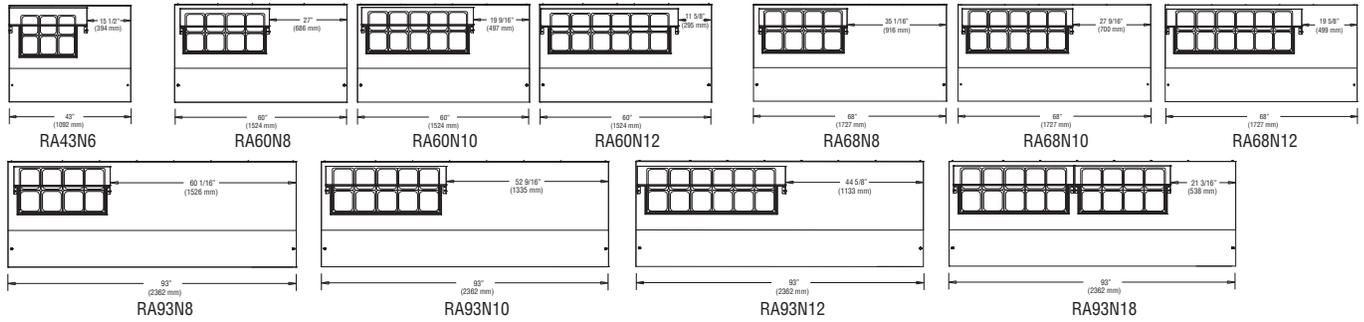

### Mighty Tops

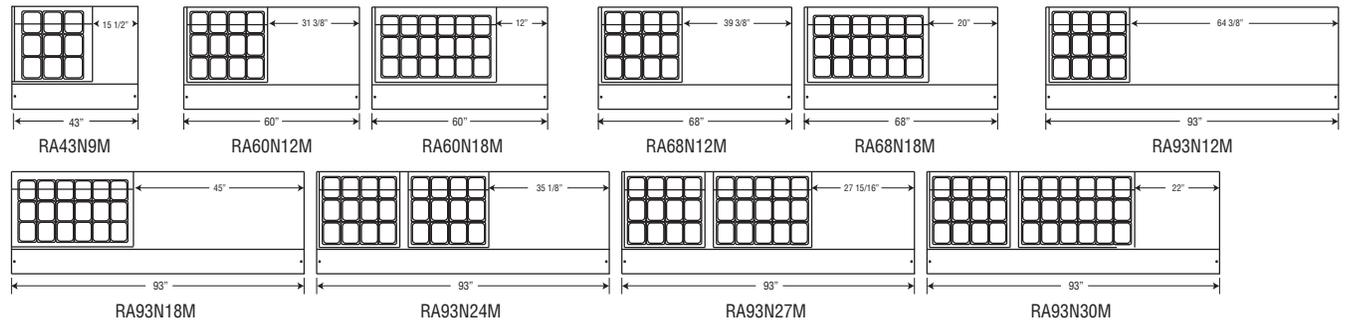

- Condensing unit left or right\*
- Door/drawer locks
- Overshelves (single or double)
- Pan slides (large section only on 60" models)
- Adjustable legs
- Add'l epoxy-coated steel shelves
- Stainless steel shelves
- Stainless steel back and interior
- Drawer in lieu of half door above the condensing unit

**Sandwich Units Only**

- Rear-mounted cutting board
- Crumb catcher (Standard Tops only)
- Flat insulated night cover
- Vision panel lid
- Composite cutting board

**Note:** Condensing unit must be on opposite side of pan openings on Sandwich Unit models



Pan slides



Drawer in lieu of door above the condensing unit



Crumb catcher




Composite cutting board

**Engineering, Manufacturing & Quality Control**



View of fans on a RA43N model

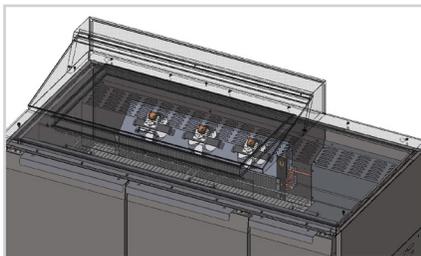

View of fans on a RA68N18M model

Continental Refrigerator engineers and builds our Base Models to meet the most stringent specifications demanded by consultants and service operators. All cabinets are constructed of top quality materials and components, attributing to their genuine ruggedness and durability. Our Base Models are designed with enhancements to endure everyday use in typical commercial kitchen environments.

Prior to factory shipping, all models are performance-run tested for a minimum of 12 hours, providing a highly sophisticated temperature analysis recording, exclusive to each individual cabinet. This recording is then supplied, along with the unit's operation manual, for the customer. A final leak test, vibration check, noise level and visual examination is made by our quality control team, to assure a superior product is shipped from our factory.

**Air Flow Worktops & Undercounters**

Unique forced air design utilizes fans across the entire back of the unit for even distribution of cold.

**Number of Fans**

- RA43N 2
- RA60N 3
- RA68N 4
- RA93N 5
- RA118N 6

**Sandwich Units**

A unique air flow distribution allows pan product to maintain 33° - 41°F.

**Number of Fans**

- RA43N 2
- RA60N 3
- RA68N 3
- RA93N 4

*Product design and specifications are subject to change without prior notice.*

## How to Buy

<b>LOCAL SALES REPRESENTATIVES</b>			<b>STATES COVERED</b>
Wyllie Marketing	Weymouth, MA	(781) 340-6157	<b>ME, RI, NH, MA, VT, CT</b>
Link 2 Hospitality Solutions	Rochester, NY	(585) 254-1780	<b>Upstate NY</b>
Pecinka Ferri Associates	Fairfield, NJ	(973) 812-4277	<b>N. NJ, New York City</b>
Schmid Dewland & Associates	Marlton, NJ	(856) 783-3400	<b>E. PA, DE, S. &amp; Central NJ</b>
Link 2 Hospitality Solutions	Bridgeville, PA	(412) 341-2020	<b>W. PA, W. VA (except Panhandle)</b>
High Sabatino Associates, Inc.	Jessup, MD	(301) 470-7051	<b>DC, MD, VA, W. VA (Panhandle)</b>
Stiefel Associates, Inc.	Lansing, MI	(517) 393-3019	<b>MI (except Upper Peninsula)</b>
Dick Stanley & Associates	Pickerington, OH	(800) 833-0797	<b>OH, KY</b>
Stiefel Associates, Inc.	Edinburgh, IN	(317) 408-6045	<b>IN</b>
Jay Mark Group, LTD	Elk Grove Village, IL	(847) 545-1918	<b>N. IL</b>
North Star Agency	Plymouth, MN	(763) 545-1400	<b>MN, ND, SD</b>
Mirkovich & Associates	Waukesha, WI	(630) 792-0080	<b>WI, MI (Upper Peninsula)</b>
Select Marketing	St. Louis, MO	(314) 961-3332	<b>MO, KS, IA, NE, S. IL</b>
Master Marketing Carolina	High Shoals, NC	(704) 860-0092	<b>NC, SC</b>
Pro-Quip Foodservice	Little Rock, AR	(501) 221-7120	<b>AR, LA, MS, W. TN (W. of Tenn. River)</b>
The Veitch Group	Ft. Lauderdale, FL	(954) 316-6162	<b>FL (except Panhandle)</b>
Merkolat	Pembroke Pines, FL	(561) 594-7153	<b>Latin America, Caribbean</b>
Premier Foodservice Group	Peachtree Corners, GA	(877) 667-2192	<b>AL, FL (Panhandle), GA, E. TN (E. of Tenn River)</b>
Desert Peak Marketing	Denver, CO	(303) 790-2424	<b>CO, S. ID, MT, UT WY</b>
Roller & Associates	Seattle, WA	(206) 547-3555	<b>WA, OR, AK, N. ID</b>
Foodservice Equipment Agents	Anaheim, CA	(714) 693-3329	<b>AZ (Bull Head City), S. CA, S. NV</b>
Inform Marketing Group	Walnut Creek, CA	(510) 337-0420	<b>N. CA, N. NV</b>
Van Cleave Marketing	Honolulu, HI	(808) 375-3820	<b>HI</b>
Desert Peak Marketing	Phoenix, AZ	(602) 255-0976	<b>AZ (except Bull Head City), NM, TX (El Paso)</b>
Forbes Hever & Wallace, Inc.	Coppell, TX	(972) 219-8898	<b>OK, TX (except El Paso)</b>



A Division of National Refrigeration & Air Conditioning Products

Continental Refrigerator | Local: (215) 244-1400  
539 Dunksferry Road | Toll Free: (800) 523-7138  
Bensalem, PA 19020 | Fax: (215) 244-9579

[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

# Continental<sup>®</sup>

## Refrigerator

INNOVATIVE DESIGNS FOR YOUR FOODSERVICE NEEDS



PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.